Rexx Rexx Rexx Rexx Rexx Rexx Rexx

Programmer's Reference

2nd Edition

by Howard Fosdick

> foreword by Mark Hessling

Easy. Powerful. Open source. Runs everywhere and interfaces to everything. That's Rexx.

This book explains the language, from an easy tutorial to advanced programming.

You'll learn -

- * Rexx for Windows, Linux, Macs, mainframes, and cell phones
- * Interfacing to GUIs, DBMSs, XML, JSON, Apache, & other tools
- * Open Object Rexx for object-oriented scripting
- * Java integration with NetRexx
- * How to write edit macros
- * Mainframe programming
- * Advanced arrays, parsing, debugging, OS commands, & more!

The only Rexx reference you'll ever need!





RexxInfo.org RexxLA.org

Rexx Programmer's Reference, 2nd Edition

Howard Fosdick



Rexx Programmer's Reference, 2nd Edition

Published by Rexx Language Association 8525 Pinefield Road, Apex, NC 27523-9601, USA

The Rexx Language Association is a Non-Profit Corporation registered in North Carolina, USA, incorporated in 1998. Visit RexxLA.org.

ISBN 978-9-40374-552-7

© 2025 2nd Edition by H. Fosdick

This is a fully revised 2nd edition of the book with the same title published in 2005 by Wiley Publishing, Inc.

This updated and revised reprint is published under authority of clause 18 of the publishing contract dated July 8, 2004 between Wiley Publishing Inc., and Fosdick Consulting Inc., and subsequent letter dated December 14, 2015, affirming right to reprint, from Fosdick Consulting Inc. to Wiley Publishing Inc., as pursuant to that contract.

LIMIT OF LIABILITY/DISCLAIMER OF WARRANTY: THE PUBLISHER AND THE AUTHOR MAKE NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS WORK AND SPECIFICALLY DISCLAIM ALL WARRANTIES, INCLUDING WITHOUT LIMITATION WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE. NO WARRANTY MAY BE CREATED OR EXTENDED BY SALES OR PROMOTIONAL MATERIALS. THE ADVICE AND STRATEGIES CONTAINED HEREIN MAY NOT BE SUITABLE FOR EVERY SITUATION. THIS WORK IS SOLD WITH THE UNDERSTANDING THAT THE PUBLISHER AND AUTHOR ARE NOT ENGAGED IN RENDERING LEGAL, ACCOUNTING, OR OTHER PROFESSIONAL SERVICES. IF PROFESSIONAL ASSISTANCE IS REQUIRED, THE SERVICES OF A COMPETENT PROFESSIONAL PERSON SHOULD BE SOUGHT. NEITHER THE PUBLISHER NOR THE AUTHOR SHALL BE LIABLE FOR DAMAGES ARISING HEREFROM. THE FACT THAT AN ORGANIZATION OR WEBSITE IS REFERRED TO IN THIS WORK AS A CITATION AND/OR A POTENTIAL SOURCE OF FURTHER INFORMATION DOES NOT MEAN THAT THE AUTHOR OR THE PUBLISHER ENDORSES THE INFORMATION THE ORGANIZATION OR WEBSITE MAY PROVIDE OR RECOMMENDATIONS IT MAY MAKE. FURTHER, READERS SHOULD BE AWARE THAT INTERNET WEBSITES LISTED IN THIS WORK MAY HAVE CHANGED OR DISAPPEARED BETWEEN WHEN THIS WORK WAS WRITTEN AND WHEN IT WAS READ.

TRADEMARKS: All trademarks are the property of their respective owners. The Rexx Language Association is not associated with any vendor mentioned in this book.

About the Author

Howard Fosdick is an independent IT consultant who supports databases and operating systems. He's written seven books and over 500 articles and frequently speaks at conferences. He co-founded the International DB2 Users Group, the Midwest Database Users Group, and CAMP IT, and invented concepts like hype curves and open consulting. While he's coded in many programming languages, Rexx remains his favorite.

RexxInfo.org for everything Rexx.

Download free guides --

How to Build a Free Computer -- from Cast-offs How to Fix Computer Hardware Privacy in a Digital World

... more ...

from RexxInfo.org/guides

Credits for 1st Edition

Senior Acquisitions Editor

Debra Williams Cauley

Development Editor

Eileen Bien Calabro

Production Editor Felicia Robinson

Technical Reviewer

Mark Hessling

Copy Editor

Publication Services

Editorial Manager Mary Beth Wakefield

Vice President & Executive Group Publisher

Richard Swadley

Vice President and Publisher

Joseph B. Wikert

Project Coordinator

Erin Smith

Graphics and Production Specialists

Jonelle Burns Carrie Foster Lauren Goddard Denny Hager Joyce Haughey Jennifer Heleine

Quality Control Technicians

John Greenough Leeann Harney Jessica Kramer Carl William Pierce

Proofreading and Indexing

TECHBOOKS Production Services

Credits for 2nd Edition

Content, Layout, Typesetting, Cover Designs: Howard Fosdick

Technical Reviewers: Many. Please see the Acknowledgments.



Foreword

Rexx is a very underrated programming language; elegant in design, simple syntax, easy to learn, use and maintain, yet as powerful as any other scripting language available today.

In 1979, Mike Cowlishaw, IBM fellow, designed a "human-centric" programming language, Rexx. Cowlishaw's premise was that the programmer should not have to tell the interpreter what the language syntax was in each program they wrote; that was the job of the interpreter. So unlike most other programming languages, Rexx does not suffer from superfluous, meaningless punctuation characters throughout the code.

Since the release of Rexx outside of IBM, Rexx has been ported to virtually all operating systems and was formally standardised with the publishing of the ANSI Standard for Rexx in 1996. In late 2004, IBM transferred their implementation of Object REXX to the Rexx Language Association under an Open Source license. This event signalled a new era in the history of Rexx.

This book provides a comprehensive reference and programming guide to the Rexx programming language. It shows how to use the most popular implementations of Rexx and Rexx external function packages and is suited to both the programmer learning Rexx for the first time as well as the seasoned Rexx developer requiring a single, comprehensive reference manual.

Rexx has had a major influence on my life for the past 20 years since I wrote my first XEDIT macro in Rexx. In the last 10 years I have maintained the Regina Rexx interpreter, ably assisted by Florian Große-Coosmann, and in my remaining spare time have developed several Rexx external function packages (and my XEDIT-like text editor, THE). However, like many developers of open source products, I have never quite documented the products as completely as they deserve.

This is the book I would have liked to write if I had had the time. I'm glad Howard had the time!

Mark Hessling

Author of Rexx/SQL, Rexx/gd, Rexx/DW, Rexx/CURL, Rexx/Curses, Rexx/Wrapper, Rexx/Trans, The Hessling Editor (THE), Maintainer of Regina, Rexx/Tk, PDCurses, http://www.rexx.org/

Foreword to the 2nd Edition

The release of the 2nd edition of *The Rexx Programmer's Reference* is a testament to the passion that Howard and the majority of users have for Rexx and the longevity of the Rexx programming language itself.

As software technologies change over the years, Rexx easily incorporates those new technologies due to its exceptional design. This flexibility to change does not come at the expense of breakage of existing code as is so common in most other programming languages. As a result, new program development using Rexx is as viable now as it was when Rexx first appeared, and existing code still runs unchanged as reliably now as when it was first developed.

This edition includes new content and changes that reflect the current state of Rexx.

I hope I'm around for the 3rd edition of *The Rexx Programmer's Reference!*

Mark Hessling

Author of Rexx/SQL, Rexx/gd, Rexx/DW, Rexx/CURL, Rexx/Curses, Rexx/Wrapper, Rexx/Trans, Rexx/JSON, The Hessling Editor (THE), and Maintainer of Regina, Rexx/Tk, and PDCurses.

www.Rexx.org

Acknowledgments for the 1st Edition

Special thanks are due to Mark Hessling, who writes and maintains Regina Rexx and a wide variety of open source Rexx tools and interfaces. As the technical reviewer for this book, Mark was an invaluable source of recommendations for improvement as well as (oops!) corrections. His expertise and helpfulness were critical to improving this book.

Special gratitude is also due to the inventor of Rexx, Michael Cowlishaw. His advice and feedback were very much appreciated.

In the process of developing this book, I wrote inquiries to many people without any prior introduction. Each and every one of them responded helpfully. It was a great pleasure to meet people with such an interest in Rexx, who so kindly answered questions and who greatly improved this book with their suggestions.

I would like to give heartfelt thanks to María Teresa Alonso y Albado, W. David Ashley, Gil Barmwater, Dr. Dennis Beckley, Alex Brodsky, Frank Clarke, Steve Coalbran, Ian Collier, Les Cottrell, Michael Cowlishaw, Chip Davis, Prof. Rony Flatscher, Jeff Glatt, Etienne Gloux, Bernard Golden, Bob Hamilton, Henri Henault, Stéphane Henault, Mark Hessling, Jack Hicks, IBM Corporation, René Vincent Jansen, Jaxo Inc., Kåre Johansson, Kilowatt Software, Les Koehler, Laboratorios Bagó S.A., Joseph A. Latone, Henri LeFebure, Michael Lueck, Antoni Levato, Dave Martin, Rob McNair, Patrick TJ McPhee, Dr. Laura Murray, Walter u. Christel Pachl, Lee Peedin, Priscilla Polk, the Rexx Language Association, Pierre G. Richard, Peggy Robinson, Morris Rosenbaum, Dr. Elizabeth Rovelli, David Ruggles, Roger E. Sanders, Thomas Schneider, Theresa Stewart, UniForum Chicago, Vasilis Vlachoudis, Stan Wakefield, Keith Watts, Dr. Sandra Wittstein, and Claudio Zomparelli.

Beyond those who provided technical advice and input for this book, I wish to thank my editors at John Wiley and Sons, Inc. Eileen Bien Calabro greatly improved the readability of this book through her writing recommendations. Debra Williams Cauley provided insightful perspective and guidance on the preparation and organization of the book. Finally, I thank Richard Swadley. I appreciate his confidence and hope this book fulfills its promise both in the quality of its material and in its sales and distribution.

Special thank you to the following developers for permission to reprint or refer to their code (most of these items fall under various open source licenses):

W. David Ashley—IBM Corporation, project leader of the Mod_Rexx project for scripts appearing in the chapter on Apache programming with Mod_Rexx

Les Cottrell and the Stanford Linear Accelerator Laboratory—Authors of Rexx/CGI library for a script illustrating their Rexx/CGI library

Henri Henault & Sons—Authors of the Internet/REXX HHNS WorkBench for a script and screen shot illustrating the Internet/REXX HHNS WorkBench.

Mark Hessling—Developer/maintainer of Regina Rexx and many open source Rexx tools for material on Rexx/gd and the reference tables of Rexx/Tk functions

<u>Acknowledgments</u>

Patrick TJ McPhee—Developer of RexxXML for the example program appearing in the chapter on RexxXML

Pierre G. Richard, Joseph A. Latone, and Jaxo Inc.—Developers of Rexx for Palm OS for example scripts appearing in the chapter on Rexx for Palm OS

Acknowledgments for the 2nd Edition

Thank you to René Jansen, President of the Rexx Language Association, for his advice and guidance in putting together this updated edition.

Thank you also to all the members of the RexxLA and others who helped by giving advice or reviewing this update: Grant Ward Able, Bill Backs, Janet Backs, Volker Bandke, Gil Barmwater, Michael Beer, Wayne V. Bickerdike, Josep Maria Blasco, Frank Clarke, Michael Cowlishaw, Chip Davis, Marcel Dür, Lionel B. Dyck, Tony Dycks, Dr Rony Flatscher, Mark L. Gaubatz, Eva Gerger, Sam Golob, Thomas Grundmann-Kahr, Rob Hamilton, Jeffrey Hennick, Mark Hessling, Peter Jacob, Willy Jensen, Dave Jones, Per Olov Jonsson, Mark McDonald, Rick McGuire, Shmuel (Seymour J.) Metz, Jeremy Nicoll, Walter Pachl, Ross Patterson, Lee Peedin, Jochem Peelen, Priscilla Polk, Julian Reindorf, Marc Remes, Pierre G. Richard, Larry Schacher, Martin Scheffler, Bruce Skelly, David Spiegel, Hobart Spitz, Bob Stark, Erich Steinböck, Theresa Stewart, J. Leslie Turriff, Vasilis Vlachoudis, James Warren, and Jon Wolfers.

Thank you to those who contributed code for this new edition: Frank Clarke, Marcel Dür, Lionel B. Dyck, Tony Dycks, Dr Rony Flatscher, Eva Gerger, Thomas Grundmann-Kahr, Mark Hessling, IBM Corporation, Willy Jensen, Julian Reindorf, Pierre G Richard, and Vasilis Vlachoudis.

Also thank you to Marcel Dür, Eva Gerger, Thomas Grundmann-Kahr, and Julian Reindorf for the very useful theses they wrote on running Rexx on Android while at the Vienna University of Economics and Business. Congratulations to Dr Rony Flatscher for his success nourishing such a talented crop of budding developers and software engineers.

Finally, thank you to Mark Hessling for his help and advice on both editions of this work, and for writing the Forewords. Mark is the developer behind Regina Rexx and many of the excellent free tools that add key functionality to Rexx. Several chapters in this book cover products he develops and supports.

And, of course, special thanks to the inventor of Rexx and NetRexx, Michael Cowlishaw.

An Open Source, Not-for-Profit Book

The author has directed that all monies made by this book be donated directly to the Rexx Language Association, a non-profit entity incorporated in North Carolina, USA.

This book is published under the *Creative Commons license BY-ND*. You can freely use and distribute this work, but with these restrictions:

Ш	BY You can not change the authorship
	ND You must distribute this work in its entirety without altering its contents

Thank you for respecting my effort in writing this book by your cooperation.

Contents

Foreword	ix
Acknowledgments	X
Introduction	XV
Part I	1
Chapter 1: Introduction to Scripting and Rexx	3
Chapter 2: Language Basics	21
Chapter 3: Control Structures	33
Chapter 4: Arrays	53
Chapter 5: Input and Output	67
Chapter 6: String Manipulation	79
Chapter 7: Numbers, Calculations, and Conversions	99
Chapter 8: Subroutines, Functions, and Modularity	109
Chapter 9: Debugging and the Trace Facility	133
Chapter 10: Errors and Condition Trapping	14 3
Chapter 11: The External Data Queue, or "Stack"	15 9
Chapter 12: Rexx with Style	169
Chapter 13: Writing Portable Rexx	189
Chapter 14: Issuing System Commands	209
Chapter 15: Interfacing to Relational Databases	229
Chapter 16: Graphical User Interfaces	255
Chapter 17: Web Programming with CGI and Apache	27 3
Chapter 18: XML and Other Interfaces	291
Part II	305
Chapter 19: Evolution and Implementations	307
Chapter 20: Regina	331
Chapter 20: Regina Chapter 21: Rexx/imc	345
Chapter 22: BRexx	359
Chapter 23: Reginald	385
Chapter 24: Programming Single Board Computers	421
Chapter 25: Android Programming	433
Chapter 26: r4 and Object-Oriented roo!	447
Chapter 27: Open Object Rexx	459
Chanter 28: Open Object Rexy Tutorial	475 475

Table of Contents

Chapter 29: IBM Mainframe Rexx	493
Chapter 30: NetRexx	51 5
Down III	E00
Part III	52 9
Appendix A: Resources	531
Appendix B: Instructions	535
Appendix C: Functions	547
Appendix D: Regina Extended Functions	573
Appendix E: Mainframe Extended Functions	593
Appendix F: Rexx/SQL Functions	597
Appendix G: Rexx/Tk Functions	607
Appendix H: Tools, Interfaces, and Packages	615
Appendix I: Open Object Rexx: Classes	619
Appendix J: Mod_Rexx: Functions and Special Variables	62 3
Appendix K: NetRexx: Quick Reference	629
Appendix L: Retrieving System Information	635
Appendix M: Answers to "Test Your Understanding" Questions	637
Appendix N: How to Use EXECIO	657
Appendix 0: How to Write ISPF Edit Macros	665
Appendix P: How to Run Rexx In Batch on Mainframes	671
Appendix Q: Rexx <> Clist	677
Appendix R: Mainframe Rexx <> ANSI Rexx	683
Appendix S: How to Code with JSON	689
Appendix T: Java Integration	695
Appendix U: The Secrets of PARSE	701
Appendix V: Array I/O	705
Appendix W: Job Interview Questions	709
Appendix X: Rexx <> Bash	721
Appendix Y: Rexx <> Python	725
Appendix Z: BRexx/370 for Mainframe Emulation	72 9
Index	733

Introduction

Of all the free scripting languages, why should you learn Rexx? Rexx is unique in that it combines *power* with *ease of use*. Long the dominant scripting language on mainframes, it is definitely a "power" language, yet it is also so easy to use that its popularity has expanded to every conceivable platform. Today Rexx developers use the language on Windows, Linux, Unix, BSD, Macs, mainframes and many dozens of other systems . . . and, there are many free and open source Rexx interpreters available.

Here's the Rexx story in a nutshell:		
	Rexx runs on <i>every</i> platform under nearly every operating system.	
	So, your skills apply anywhere and your code runs everywhere.	
	Rexx enjoys a strong international standard that applies to every Rexx interpreter	
	from cell phones and handhelds to PCs to servers to mainframes.	
	Rexx is as easy as JavaScript or PHP, yet about as powerful as Java or Perl.	
	Rexx's large user community means:	
	☐ Many free interpreters optimized for different needs and environments	
	☐ A vast array of free interfaces and tools	
	☐ Good support	
	Rexx comes in object-oriented versions as well as versions that are Java-compatible (one even runs on the Java virtual machine!)	

You may be wondering why ease of use is so important in a programming language. A truly easy language is easy to use, learn, remember, and maintain. The benefits to beginners are obvious. With Rexx, you can start coding almost immediately. There are no syntax tricks or language details to memorize before you begin. And, since Rexx is also a power language, you can rest assured that you won't run out of capability as you learn and grow with it. Read the first few chapters in this book, and you'll be scripting right away. Continue reading, and you'll mature into advanced scripting before you finish.

If you are an experienced developer, Rexx offers more subtle benefits. You will be more productive, of course, as you free yourself from the shackles of syntax-driven code. More important is this: **simplicity yields reliability**. Your error rate will decline, and you'll develop more reliable programs. This benefit is greatest for the largest systems and the most complicated scripts. Your scripts will also live longer because others will be able to understand, maintain, and enhance them. Your clever scriptlets and application masterpieces won't die of neglect when someone else takes over and maintains your code.

Few easy languages are also powerful. Now, how does Rexx do that?

Introduction

Rexx surrounds its small instruction set with an extensive function library. Scripts leverage operating system commands, external interfaces, programs, and functions. Rexx is a "glue" language that ties it all together. Yet the language has few rules. Syntax is simple, minimal, flexible. Rexx doesn't care about uppercase or lowercase or formatting or spacing. Rexx scripts don't use special symbols and contain no punctuation.

Power does not require coding complexity!

If you've worked in the shell languages, you'll breathe a sigh of relief that you've found a powerful language in which you can program now and then without trying to recall arcane language rules. If you've struggled with the syntax of languages such as Bash, Korn, Awk, Perl, C++, or the C-shell, you'll enjoy focusing on your programming problem instead of linguistic peculiarities. And if you've ever had to maintain someone else's code written in one of those languages, well . . . you might *really* be thankful for Rexx!

This book contains everything you need to know to get started with Rexx. How to freely download and install an appropriate interpreter. How to program in standard "classic" Rexx and object-oriented Rexx. How to program Windows, Linux, Unix, Macs, Androids, and mainframes. How to program in the Java environment with object-oriented Rexx, or a Rexx-based language called NetRexx. How to script operating system commands, control Web servers and databases and graphical user interfaces (GUIs) and Extensible Markup Language (XML) and Apache and . . . you name it.

Everything you need is in this one book. It's a Rexx encyclopedia. It teaches standard Rexx so that your skills apply to any platform—from cell phones to desktops and laptops to midrange servers to mainframes. Yet it goes beyond the basics to cover interface programming and advanced techniques. The book starts out easy, based on coding examples throughout to make learning fast, simple, and fun. But it's comprehensive enough to cover advanced scripting as well. You can freely download all the Rexx interpreters, tools, and interfaces it covers. Welcome to the world of free Rexx!

Who This Book Is For

This book is for anyone who wants to learn Rexx, or who already works with Rexx and wants to expand his or her knowledge of the language, its versions, interfaces, and tools. How you use this book depends on your previous programming or scripting knowledge and experience:

If you are a complete beginner, you'll find Rexx easy to learn. This book will tell you
everything you need to know. It's a progressive tutorial based on coding examples, so you
won't get lost. You'll be able to handle almost any programming problem by the end of the
book.

If you are an experienced programmer, you can quickly learn Rexx by reading the tutorial
chapters. You'll be programming immediately. As the book progresses into tutorials on
interfaces to databases, Web servers, GUIs, and the like, you'll learn to program Rexx in the
context of the larger environment.

If you are a systems administrator or support person, you'll learn a language that applies to a wide variety of situations and can be a great tool. This book covers the interfaces, tools, and varieties and implementations of Rexx you'll need to know. It doesn't stop with the basics. It explores the advanced features you'll want to use.
If you already script Rexx, you will be able to expand your knowledge. You'll learn about free Rexx interfaces and tools with which you may not be familiar. You'll learn Rexx programming in new environments, such as object-oriented scripting, scripting in the Java environment and even how to program Rexx in mainframe emulation on your personal computer. You'll find this complete reference the only Rexx book you'll ever need.

What This Book Covers

This book teaches standard Rexx, quickly and simply. It emphasizes coding examples. It teaches you what you need to know to work with Rexx on any platform. You'll know a language that runs everywhere and applies to almost any programming problem.

Beyond the Rexx language proper, this book covers all the major interfaces into Web servers, SQL databases, GUIs, XML, JSON, graphics processing, and the like. It describes many of the free tools that are available to make scripting with Rexx easier and more productive.

The book covers a number of free Rexx interpreters. Most meet the international standards for Rexx, yet each adds its own special features and extensions. The book tells where to download each interpreter, shows how to install it, and demonstrates how to leverage its particular strengths.

All the Rexx interpreters, tools, and interfaces this book covers are free or open source. One exception is IBM mainframe Rexx, which comes bundled with IBM's operating systems.

Ultimately, this book covers not only Rexx scripting, but the whole world of Rexx programming across all environments and interfaces, and with all Rexx interpreters.

How This Book Is Structured

Take a quick look at the table of contents, and you will see that this book is broken down into three broad sections:

The book begins with a progressive tutorial that covers the basics of the Rexx language. These
eventually lead into more advanced scripting topics, such as how to write portable code and
using optimal coding style. The last chapters of this section (Chapters 15 through 18) cover the
most common Rexx interfaces and tools. These introduce and demonstrate how to code scripts
that interface to operating systems, SQL databases, Web servers, GUIs, XML, and other tools.

Introduction

The second section of the book describes the different Rexx interpreters and the unique
advantages of each. These chapters apply Rexx to different environments and include tutorials
on object-oriented Rexx, cell phone scripting, programming in Java environments, and many
other topics. All include complete example programs.

☐ Finally, the book contains a comprehensive reference section in its appendices. You won't need any other book to script Rexx.

What You Need to Use This Book

You need nothing beyond this book. All its examples were all run using freely downloadable Rexx interpreters, tools, and interfaces. The chapters tell you where to download any interpreters, tools, and interfaces the book demonstrates, as well as how to set up and install them. Most of the examples in this book were run under Windows and/or Linux, but you can work with this book with Rexx running any operating system you like.

Download the Example Code

We recommend that you download the source code for all of the examples in this book from www.RexxInfo.org. All our downloads are free and require no registration or email address.

Conventions

We've used a number of conventions throughout the book.

Boxes like this one hold important, not-to-be-forgotten information that is directly relevant to the surrounding text.

Concerning styles in the text:

	We italicize important words when we introduce them.
	We show keyboard strokes like this: Ctrl-A.
	We show filenames, URLs, variable names, and code within the text like this: $my_file.txt$.
	We present code in two different ways:
In	code examples we highlight new and important code with a gray background.

The gray highlighting is not used for code that's less important in the present context, or that has been shown before.

The Rexx language is not case-sensitive, so its instructions and functions can be encoded in uppercase, lowercase, or mixed case. For example, the wordlength function can be encoded as wordlength, wordlength, or WORDLENGTH. This book uses capitalization typical to the platforms for which its sample scripts were written, but you can use any case you prefer.

Due to the typesetting software used in preparing this book, in a few places in the text, quotation marks might appear as forward-leaning or backward-leaning. Please consider the leftmost examples as equivalent to the vertical quotation marks that Rexx requires:

'Hello' 'Hello' "Hello" Correct: 'Hello' "Hello"

Only vertical single or double quotation marks will run correctly when coded in a Rexx program.

Reporting Errors

Thousands of programmers used the first edition of this book and reported no errors beyond a few typos. Our goal is to match this level of quality in this 2^{nd} edition. This new edition has been reviewed by many experts from the Rexx Language Association.

However, updating for this new edition required working off the 1st edition's PDF files -- an error-prone process, especially when working with code in text boxes and frequent font changes. So, try as we might to catch them, errors introduced by typesetting could slip through.

If you find an error, please contact the author via his website at www.RexxInfo.org and report it. We'll correct the digital edition immediately, and the print edition as soon as the next printing. Thank you for your help in making this the best possible resource for Rexx programmers.

Online Resources

The website www.RexxInfo.org is a one-stop shop for all things Rexx. It offers free downloads for all Rexx interpreters and tools, articles, sample code, information, links, and other resources. Its reference section offers quick online lookup for all Rexx language instructions, functions, classes, and methods, and also a full set of free manuals for all Rexx products, including all IBM manuals.

Appendix A on "Resources" describes many other good sources of Rexx information.

What's New in the 2nd Edition?

This is a fully revised 2nd edition of a book originally published in 2005.

Completely new content in this edition includes: the Introduction; chapters 1, 19, 22, 24, 25, and 27; and, appendices A, I, L, N, O, P, Q, R, S, T, U, V, W, X, Y, and Z. Of course, all other content has been updated as appropriate.

Introduction

Much ne	w material has been added in this edition including:
	Java integration
	Using JSON
	Array I/O
	Advanced parsing
	Android programming
	Rexx on single board computers
	SQLite programming
	Equivalence charts for Rexx <> Bash
	Equivalence charts for Rexx <> Python
	Sample job interview questions
Readers	have also asked for more coverage of mainframe Rexx, so we've added:
	Using EXECIO
	How to write ISPF edit macros
	How to run Rexx in batch
	Rexx on personal computers that emulate mainframes
	Equivalence charts for IBM mainframe REXX <> ANSI-1996 standard Rexx
	Equivalence charts for Rexx <> Clist
Much no	wy content has been provided in new appendices, rather than chapters, due to typecetting constraints

Much new content has been provided in new appendices, rather than chapters, due to typesetting constraints.

We've retained coverage of a few topics that are less important than previously. This includes the chapters on the out-of-support interpreters Reginald, r4, and roo!, and the brief discussion of Windows CE. We've kept this content because some readers requested it. It's clearly marked in the text. If it is not of interest to you, please just skip it.

Among Rexx's great benefits are its strong language standards and remarkable stability. Thus it hasn't been necessary to modify or update the book's code examples. The proof is in the product -- you can rely on Rexx to run mature code without difficulty or disruption.

Note that this edition does not always reflect the latest names of a few rebranded products. For example, it may refer to the Db2 database under its older name of "DB2".

And remember that website addresses do change. If one this book suggests becomes obsolete, just use your search engine to find the material you seek.

Part I

1

Introduction to Scripting and Rexx

Overview

Before learning the Rexx language, you need to consider the larger picture. What are scripting languages? When and why are they used? What are Rexx's unique strengths as a scripting language, and what kinds of programming problems does it address? Are there any situations where Rexx would *not* be the best language choice?

This chapter places Rexx within the larger context of programming technologies. The goal is to give you the background you need to understand how you can use Rexx to solve the programming problems you face.

Following this background, the chapter shows you how to download and install the most popular free Rexx interpreter on your Windows, Linux, Unix, BSD, or Apple computer. Called *Regina*, this open-source interpreter provides a basis for your experiments with Rexx as you progress in the language tutorial of subsequent chapters.

Note that you can use *any* standard Rexx interpreter to learn Rexx. So, if you have some other Rexx interpreter available, you are welcome to use it. We show how to download and install Regina for readers who do not already have a Rexx interpreter installed, or for those who would like to install an open-source Rexx on their PC.

Why Scripting?

Rexx is a *scripting language*. What's that? While most developers would claim to "know one when they see it," a precise definition is elusive. Scripting is not a crisply defined discipline but rather a directional trend in software development. Scripting languages tend to be:

☐ *High level* — Each line of code in a script produces more executable instructions — it does more — than an equivalent line encoded in a lower-level or "traditional" language.

Chapter 1

- ☐ Glue languages Scripting languages stitch different components together operating system commands, graphical user interface (GUI) widgets, objects, functions, or service routines. Some call scripting languages glue languages. They leverage existing code for higher productivity.
- ☐ *Interpreted* Scripting languages do not translate or *compile* source code into the computer's machine code prior to execution. No compile step means quicker program development.
- ☐ *Interactive debugging* Interpreted languages integrate interactive debugging. This gives developers quick feedback about errors and makes them more productive.
- ☐ Variable management Higher-level scripting languages automatically manage variables. Rexx programmers do not have to define or "declare" variables prior to use, nor do they need to assign maximum lengths for character strings or worry about the maximum number of elements tables will hold. The scripting language handles all these programming details.
- ☐ Typeless variables Powerful scripting languages like Rexx even relieve the programmer of the burden of declaring data types, defining the kind of data that variables contain. Rexx understands data by usage. It automatically converts data as necessary to perform arithmetic operations or comparisons. Much of the housekeeping work programmers perform in traditional programming languages is automated. This shifts the burden of programming from the developer to the machine.

Figure 1-1 contrasts scripting languages and more traditional programming languages.

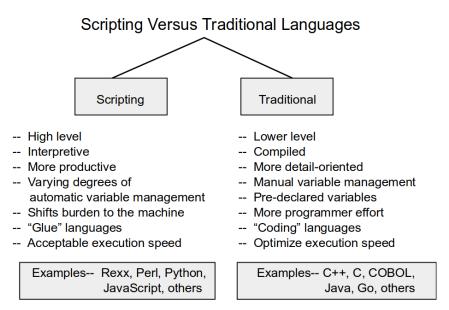


Figure 1-1

On the downside, scripting requires greater machine resources than hand-coded programs in traditional, compiled languages. But in an era where machine resources are less expensive than ever and continue to decline in price, trading off expensive developer time for cheaper hardware makes sense.

Hardware performance increases geometrically, while the performance differential between scripting and compiled languages remains constant.

Here's how hardware addresses scripting performance. The original IBM PC ran an 8088 processor at 4.77 MHz. It executes less than a hundred *clauses* or statements of a Rexx script every second. Current personal computers execute millions of Rexx clauses per second.

Just for fun, this table shows how much faster a standard Rexx benchmark script runs on typical PCs at various times. Later in this chapter, we'll show you how to benchmark your own computer against the numbers in this table:

YearN	lake	Processor	SpeedMe	mory	Operating System	Rexx	Clauses per Second
1982	IBM PC	8088	4.77 Mhz	320 KB	DOS 6.2	Mansfield	70
	Zenith	8088-2	8 Mhz	640 KB	DOS 6.2	Mansfield	95
1988	Clone	386/DX	25 Mhz	2 MB	DOS 6.2	BRexx	3,600
1993	Clone	486/SX	25 Mhz	8 MB	Windows 3.1	BRexx	6,000
1998	Gateway	Pentium II	266 Mhz	512 MB	Red Hat 8	Regina	180,000
2005	Clone	Celeron	2.6 Ghz	1 GB	Windows XP	Regina	1,100,000
2010	Lenovo	Core2Duo	2*3.0Ghz	4 GB	Windows 7	Regina	4,545,455
2014	Dell	i5-3350p	4*3.1Ghz	8 GB	Windows 8.1	ooRexx	3,030,303
2017	HP 8570p	i7-3520m	8*2.9Ghz	8 GB	Win 7 Ent.	ooRexx	7,363,893
2019	Dell Vostro	i7-3770	8*3.4Ghz	8 GB	Linux Mint 19	BRexx	8,498,672
2022	Gigabyte	amd3900x	3.8 Ghz	32 GB	Win 10 Pro	Regina	9,250,694
2023	Acer	amd6800u	2.7 Ghz	16 GB	Windows 11	ooRexx	13,636,364
2023	Apple	M1	3.2 Ghz	16 GB	Ventura 13.3.1	Regina	22,233,751

Source- author's hands-on tests and contributions by members of the Rexx Language Association.

The bottom line is that the program that consumes over an hour on a decades-old 8088 runs in a split second on a modern desktop. While the table ignores subtle factors that affect performance, the trend is clear. For most programming projects, trading machine cycles for labor costs makes sense. Why not use a more productive tool that shifts the burden to the machine?

Labor-saving benefits extend beyond program development to maintenance and enhancement. Experts like T. Capers Jones estimate that up to 75 percent of IT labor costs are devoted to program maintenance. An easy-to-read, easy-to-maintain scripting language like Rexx saves a great deal of money.

Chapter 1

Sometimes, you'll hear the claim that scripting languages don't support the development of large, robust, "production-grade" applications. Years ago, scripting languages were primitive and this charge rang true. But no longer. IT organizations routinely develop and run large applications written in Rexx and other scripting languages. The author has run across many large production business applications consisting of tens of thousands of lines of code. You can run an entire enterprise on scripts.

Why Rexx?

The distinguishing feature of Rexx is that it combines *ease of use* with *power*. Its goal is to make scripting as easy, fast, reliable, and error-free as possible. Many programming languages are designed for compatibility with older languages, the personal tastes of their inventors, the convenience of compiler-writers, or machine optimization. Rexx ignores extraneous objectives. It was designed from day one to be powerful yet easy to use.

One person invented Rexx and guided its development: Michael Cowlishaw of IBM's UK laboratories. Cowlishaw gave the language the coherent vision and guiding hand that ambitious software projects require to succeed. Anticipating how the Internet community would cooperate years later, he posted Rexx on the internet of its day, IBM's VNET, a network of tens of thousands of users. Cowlishaw solicited and responded to thousands of emailed suggestions and recommendations on how people actually used early Rexx. The feedback enabled Cowlishaw to adapt Rexx to typical human behavior, making Rexx a truly easy-to-use language.

Ease of use is critical — even to experienced developers — because it leads to these benefits: Low error rate — An easy-to-use language results in fewer bugs per program. Languages that rely on arcane syntax, special characters and symbols, and default variables cause more errors. *Reliability* — Programs are more reliable due to the lower error rate. Longer-lived code — Maintenance costs dictate the usable life span of code. Rexx scripts are much easier to maintain than scripts written in languages that rely on special characters and complex syntax. Reduced cost — Fast program development, coupled with a low error rate and high reliability, lead to reduced costs. Ease of maintenance is critical because up to three-quarters of IT professionals engage in maintenance activities. Code written by others is easier to understand and maintain if it is written in Rexx instead of syntax-driven languages like the Linux shell languages or Perl or Awk or C++. This reduces labor costs. Higher productivity — Developer productivity soars when the language is easy to work with. Scripting in Rexx is more productive than coding in either lower-level compiled languages or syntax-based shell languages. Quicker testing — Interpretive scripting languages lend themselves to interactive testing. Programmers get quick feedback and can easily trace program execution. Combined with the low error rate of an easy-to-use language, this means that less test time is required.

Easy to learn — An easy-to-use language is easier to learn. If you have programmed in any

other programming or scripting language, you can pick up Rexx very quickly.

Introduction to Scripting and Rexx

		Easy to remember — If you write only the occasional program, you'll find Rexx easy to remember. Languages with special characters and quirky syntax force you to review their rules if you only script now and then.
		<i>Transfer skills</i> — Since Rexx is easy to work with, developers find it easy to adapt to platform differences or the requirements of different interfaces. Rexx has a strong platform-independent standard. As well, many Rexx interfaces and tools are themselves cross-platform products.
Ро	we	r and Flexibility
la V	begini anguaş vould	exx is easy to learn and use does <i>not</i> mean that it has limited features or is some sort of ner's language." Rexx competes, feature for feature, with any of the other major scripting ges. If it didn't, it certainly would not be the primary scripting language for mainframes, nor it have attained the widespread use it enjoys today on so many other platforms. Nor would there sands of Rexx users distributed around the world.
d	ifficul	use and power traditionally force language trade-offs. It is easy to get one without the other, but to achieve both. Rexx is specifically designed to combine the two. It achieves this goal through rinciples:
		Simple syntax — Some very powerful languages rely extensively on special symbols, nonobvious default behaviors, default variables, and other programming shortcuts. But there is no rule that power can only be achieved in this manner. Rexx eschews complex "syntax programming" and oncourages simpley more readable programming based on English

syntax and placement, and lets them concentrate on the programming problem they face. Consistent, reliable behavior — Rexx behaves "as one would assume" at every opportunity. Its early user community provided feedback to one "master developer" who altered the language to conform to typical human behavior. As the inventor states in his book defining Rexx: "The language user is usually right." Rexx was designed to encourage good programming

practice and then enhanced by user feedback to conform to human expectations.

permits programmers to self-describe programs by techniques such as indentation, readable comments, case variations, and the like. Rexx relieves programmers from concern about

Modularity and structured programming — Rexx encourages and supports modularity and structured programming. Breaking up large programming problems into discrete pieces and restricting program flow to a small set of language constructs contributes greatly to ease of use and a low error rate when developing large applications. These principles yield simplicity without compromising power. (Chapters 3 and 8 explore them.)

Chapter 1

Fewer rules — Put the preceding points together, and you'll conclude that Rexx has fewer
rules than many programming languages. Developers concentrate on their programming
problem, not on language trivia.

Standardization — While there are many free Rexx interpreters, nearly all adhere to the Rexx standards. This makes your scripts portable and your skills transferable. A standardized language is easier to use than one with numerous variants. Rexx has two strong, nearly identical standards. One is defined in the book *The Rexx Language*, or *TRL-2*, by Michael Cowlishaw (Prentice-Hall, 1990, second edition). The other is the 1996 standard from the American National Standards Institute, commonly referred to as *ANSI-1996*. The ANSI-1996 specification is a true superset of TRL-2 that adds just a few important language features.

Free and Open Source

As we'll describe below, you can select from a good number of different Rexx interpreters. They come in both open source and commercial versions. If you prefer a free and open source (or FOSS) product, there is always a Rexx interpreter available for your platform.

The vast majority of Rexx tools are free and open source, too. Hundreds of them cover every conceivable need, from graphical user interfaces to databases, from telecommunications to development environments, to almost every other category you can imagine.

Universality

Rexx is a *universal language*. It runs on every platform, from cell phones and handhelds, to laptops and desktops, to servers of all kinds, all the way up to the largest mainframes and supercomputers.

Here are the many platforms on which free Rexx interpreters run:

All versions of Windows, Linux, Unix, BSD, Apple operating systems and macOS, and all IBM operating systems.
Cell phones and tablets running Android and other various kinds of handhelds
Single board computers and embedded systems applications
IBM servers (i-series, pSeries, POWER/PowerPC, Linux for Z, OpenEdition/Unix System Services), Amiga-derived systems (AmigaOS 4 or AOS4, MorphOS, AROS, aeROS or AEROS), DOS-family systems (MS-DOS, PC-DOS, FreeDOS, all others), OS/2-derived systems (eCS and ArcaOS), plus OpenVMS, QNX, and others
Many other lesser-used platforms too numerous to list

Introduction to Scripting and Rexx

The b	enefits of a universal language are several. Among them:
	Your skills apply to any platform
	Your scripts run on any platform
Linux	s an example. A site that downsizes its mainframes to Linux servers could install free Rexx on the machines. Rexx becomes the vehicle to transfer personnel skills, while providing a base for sting scripts.
could	other example, an organization migrating from procedural to object-oriented programming (OOP use free Rexx as its cross-platform entry point into OOP. Standard, procedural Rexx is a true subsect-oriented Rexx.
deskt devel	al example: a company runs a data center with mainframes and Unix servers, uses Windows on the op, and programs Android tablets for field agents. Rexx runs on all these platforms, making opers immediately productive across the whole range of company equipment. Rexx enables a tramer to program a handheld, or Windows developer to script under Unix.
	ndardized scripting language that is freely available across a wide range of systems yields calleled skills applicability and code portability.
Rexx	cal Rexx Applications is a general-purpose language. It is designed to handle diverse programming needs. Its power it the flexibility to address almost any kind of programming problem. Here are examples.
	As a "glue" language — Rexx has long been used as a high-productivity "glue" language for stitching together existing commands, programs, and components. Rexx offers a higher-level interface to underlying system commands and facilities. It leverages services, functions, objects, widgets, programs, and controls.
	Automating repetitive tasks — Rexx scripts automate repetitive tasks. You can quickly put together little scripts to tailor the environment or make your job easier. Rexx makes it easy to issue commands to the operating system (or other environments or programs) and react to their return codes and outputs.
	Systems administration — Rexx is a high-level, easy-to-read, and easy-to-maintain way to script system administration tasks. By its nature, systems administration can be complex. Automating it with an easily understood language raises system administration to a higher, more abstract, and more manageable level. If you ever have to enhance or maintain systems administration scripts, you'll be thankful if they're written in Rexx instead of some of the alternatives!
	<i>Extending the operating system</i> — You typically run Rexx scripts simply by typing their name at the operating system's command prompt. In writing scripts, you create new operating system "commands" that extend or customize the operating system or programming environment.

Chapter 1

<i>Application interfaces</i> — Rexx scripts can create flexible user interfaces to applications programmed in lower-level or compiled languages.
Portable applications — Rexx's standardization and extensive cross-platform support make it a good choice for applications that must be ported across a range of systems. Its readability and ease of maintenance make it easy to implement whatever cross-platform enhancements may be desired. For example, while Rexx is the same across platforms, interfaces often vary. Standardizing the scripting language isolates changes to the interfaces.
Prototyping and exploratory programming — Since Rexx supports quick development, it is ideal for developing prototypes, whether those prototypes are throw-aways or revisable. Rexx is also especially suitable for exploratory programming or other development projects apt to require major revision.
Personal programming — An easy-to-use scripting language offers the simplicity and the speedy development essential to personal programming. PCs and handheld devices often require personal programming.
<i>Text processing</i> — Rexx provides outstanding text processing. It's a good choice for text processing applications such as dynamically building commands for programmable interfaces, reformatting reports, text analysis, and the like.
Handheld devices — Small devices require compact interpreters that are easy to program. Rexx is useful for handheld devices of various kinds, including mobile and smart phones.
<i>Migration vehicle</i> — Given its cross-platform strengths, Rexx can be used as a migration vehicle to transfer personnel skills and migrate legacy code to new platforms.
Macro programming — Rexx provides a single macro language for the tools of the programming environment: editors, text processors, applications, and other languages. Rexx's strengths in string processing play to this requirement, as does the fact it can easily be invoked as a set of utility functions through its standardized application programming interface, or API.
Embeddable language — ANSI Rexx is defined as a library which can be invoked from outside applications by its standard API. Rexx is thus a function library that can be employed as an embeddable utility from other languages or systems.
Mainframe support – Rexx is the default scripting language for several operating systems. Mainframe systems like z/OS, z/VM, and VSE/n are examples. Not only is Rexx the most popular scripting language on these systems, it is also the only high-level language that links into many subsystems essential to managing and administering them.
Mathematical applications — Rexx performs computations internally in decimal arithmetic, rather than in the binary or floating-point arithmetic of most programming languages. The result is that Rexx always computes the same result regardless of the underlying platform. And, it gives precision to 999999 decimal places! But Rexx is not suitable for all mathematical applications. Advanced math functions are external add-ins rather than built-in functions for most Rexx interpreters, and Rexx performs calculations slowly compared to compiled languages optimized for these tasks, such as Fortran or Julia.

What Rexx Doesn't Do

There are a few situations where Rexx may not be the best choice.

Rexx is not a *systems programming language*. If you need to code on the machine level, for example, to write a device driver or other operating system component, Rexx is probably not a good choice. While there are versions of Rexx that permit direct memory access and other low-level tasks, languages like C/C++ or assembler are more suitable. Standard Rexx does not manipulate direct or relative addresses, change specific memory locations, or call PC interrupt vectors or UEFI/BIOS service routines.

Rexx is a great tool to develop clear, readable code. But it cannot force you to do so; it cannot save you from yourself. Chapter 12 discusses "Rexx with style" and presents simple recommendations for writing clear, reliable code.

Scripting languages consume more processor cycles and memory than traditional compiled languages. This affects a few projects. An example is a heavily used transaction in a high-performance online transaction processing (OLTP) system. The constant execution of the same transaction might make it worth the labor cost to develop it in a lower-level compiled language to optimize machine efficiency.


Another example is a heavily computational program in scientific research. Continual numeric calculation might make it worthwhile to optimize processor cycles through a computationally oriented compiler.

A final example might be where you're writing part of an operating system that is in constant use. In this case it might be worth investing the extra effort to develop the code in a low-level language like an assembler, or at least a fast compiled language (like C), to gain maximum efficiency and the quickest possible execution time.

In most other situations, for most other applications, our profession has reached the consensus that scripting languages are plenty fast enough. And they are so much more productive! This is why the shift to scripting has been one of the biggest software trends since the turn of the century.

If you're interested in reading further about the evolution towards scripting, chapter 19 explores this in some detail.

Figure 1-2 summarizes the kinds of programming problems to which Rexx is best suited as well as those for which it may not be the best choice.

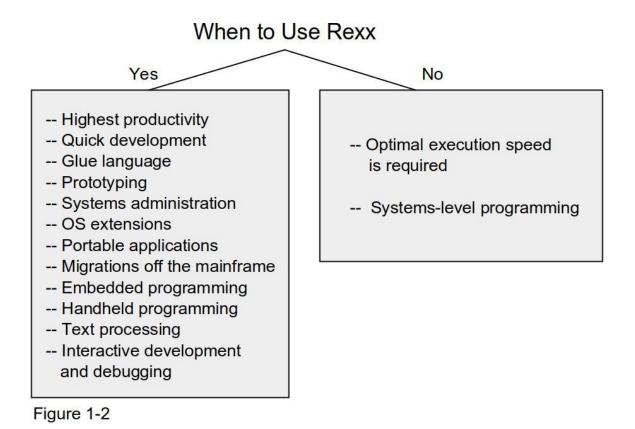

Which Rexx?

There are many free implementations of what we refer to as standard or *classic Rexx*. This is Rexx as defined by the TRL-2 or ANSI standards mentioned earlier. There are also two object-oriented supersets of classic procedural Rexx. And, there is NetRexx, the free Rexx-like language that runs in a Java Virtual Machine and presents a complementary or an alternative to Java for developing applications. Which Rexx should you use?

The first half of this book teaches classic Rexx. It applies to any standard Rexx interpreter on any platform. Once you know standard Rexx you can easily pick up the extensions unique to any Rexx interpreter. You can also easily learn interface programming, how to use Rexx tools and packages, object-oriented Rexx, NetRexx, or any Rexx variant. After all, the whole point of Rexx is ease of learning!

This table summarizes the major Rexx interpreters. All are free and available at no cost (except for IBM's Rexx Compiler). Most are open source, while a few are proprietary and come bundled with an operating system.

They are distributed either as easy-to-install packages, directly executable binaries, or source code.

Introduction to Scripting and Rexx

Interpreter	Platforms	Cost & Licensing
Regina	Nearly everywhere	Free, open source, GNU Library or
	(except mainframes)	LGPLv2
Open Object Rexx	Windows, Linux, Unix, BSD,	Free, open source, GPLv2, CPL 1.0
(aka "ooRexx")	macOS	
Open Object Rexx for Androic	l Android	Free, open source, Apache 2.0
(aka "ooRexx for Android")		
BRexx	Linux, Unix, BSD, macOS,	Free, open source, GPLv2
	Android, Windows, DOS	
BRexx370	Mainframes	Free, open source, GPLv2
Rexx/imc	BSD, Unix, Linux	Free, open source, no warranty
IBM REXX	Mainframes	Bundled, Proprietary license
IBM REXX Compiler	Mainframes	Proprietary license
Rexxoid	Android	Free, open source
(aka "Rexx for Android")		
NetRexx	Anywhere with a Java	Free, ICU License
	Virtual Machine	
ARexx	Amiga-derived systems	Free, bundled, license varies
cREXX	z/VM, others soon	Free, MIT license
R4 (out of support)	Windows	Free. Limited warranty
Roo! (out of support)	Windows	Free. Limited warranty
Reginald (out of support)	Windows	Free. No warranty

All these interpreters meet the TRL-2 Rexx language standard. The single exception is NetRexx, which is best termed a "Rexx-like" language. Any standard Rexx you have installed can be used for working with the sample code in the first half of this book. This includes all the previously listed interpreters (except NetRexx), as well as standard Rexx interpreters bundled with mainframe or other operating systems.

To get you up and programming quickly, we defer closer consideration of the unique strengths of the various Rexx interpreters and the differences between them.

(If you need to know more right now, skip ahead to Chapter 19. That chapter discusses the evolution of Rexx and the roles it plays as a scripting language. It describes all the free Rexx interpreters above and presents the strengths of each. Chapters 20 through 30 then show how and where to download and install each Rexx interpreter. They describe the unique features of each and demonstrate many of them in sample scripts.)

If you're new to Rexx, we recommend starting with Regina Rexx. Regina Rexx is a great place to start for several reasons:

Popularity — Regina is the most widely used free Rexx. Its large user community makes
it easy to get help on public forums. More interfaces and tools are tested with Regina
than any other Rexx implementation.

Chapter 1

Runs anywhere — Rexx is a platform-independent language, and Regina proves the point. Regina runs on almost any operating system including those in these families: Windows, Linux, Unix, BSD, macOS, and many lesser-used systems.
$\it Meets~all~standards - Regina~meets~all~Rexx~standards~including~the~TRL-2~and~ANSI-~1996~standards.$
<i>Well Documented</i> — Regina comes with complete documentation that precisely and fully explains the product.
<i>Open source</i> — Regina is free and open source and distributed under the GNU Library General Public License. A few Rexx interpreters are free but not open source, as shown in the preceding table.

The code examples in this book all conform to standard Rexx and were tested using Regina Rexx under Windows and/or Linux. Run these scripts under any standard Rexx in any environment. A few scripts require a specific operating system. For example, those in Chapter 14 illustrate how to issue operating system commands and therefore are system-specific. Other scripts later in the book use specific open-source interfaces, tools, or interpreters. Where we present examples that run only in certain environments, we'll point it out.

To get you ready for the rest of the book, the remainder of this chapter shows you how to download and install Regina under Windows, Linux, Unix, BSD, and macOS. You need only install Regina if you don't already have access to a Rexx interpreter.

Downloading Regina Rexx

For a free download of Regina Rexx, go to the Regina project homepage at SourceForge at https://sourceforge.net/projects/regina-rexx/. Click on the Files tab on the horizontal menu to access the downloads page at https://sourceforge.net/projects/regina-rexx/files/.

From the **Files** page, you can click on **regina-documentation** and download Regina's two PDF product manuals. You'll probably want to download the files for the latest product release.

Also on the **Files** page, you can also click on **regina-rexx** to download the product itself. Again, you'll encounter a list of releases. Pick the latest one.

Now you'll face a screen with a long list of downloadable files. (There are so many files because Regina runs on so many different platforms.) Scroll down and you'll see the files grouped by operating system. You'll see groupings for **Windows**, **Linux**, **macOS**, **BSD**, and **Others**.

Once you find the group of downloads for your operating system, it's a simple matter of selecting which download matches your specific computer.

Okay, let's walk through the exact install steps you need to follow to install for Windows, Linux, and other systems like macOS, BSD, and Unix.

Installing Regina On Windows

From the list of downloadable files at the SourceForge project webpage, scroll down to the **Windows** group.

Your goal is to select the correct Windows download for your computer. You want each column in the table to match your computer's specifications.

Select the entry in the **Architecture** column that matches your computer: **x86_64** for 64-bit Windows on Intel processors, **x86** for 32-bit Windows on Intel processors, or **arm64** for 64-bit ARM processors. The **Format** column tells what kind of install format you're downloading.

For example, for my computer I selected the file **Regina__w64.exe** (the underscores represent a variable product release number). That's for 64-bit Windows on Intel computers. The **Format** entry describes this as a "**Self-installing executable.**" Perfect! That makes for a very easy Windows installation.

Once you've downloaded the proper file, double-click on it to start the installation. You'll proceed through a standard Windows install. Accept the defaults all the way through.

This installs Regina's Demos, Development Kit, and Documentation, along with the interpreter itself. It requires very little space (less than ten megabytes).

The Windows default install directory will be C:\ Program Files\rexx.org\Regina for 64-bit Intel architecture and ARM processors, and C:\Program Files (x86)\rexx.org\Regina for 32-bit Intel architecture processors.

The default install will also add the Regina installation directory to your PATH variable and include the REGINA_HOME environmental variable. These settings enable you to easily run Regina scripts without any additional steps.

Another screen will prompt you for the filename extensions for your Regina scripts. Traditionally, Regina scripts use filename extension of .rexx, so select that.

A final screen asks whether you want to install and optionally auto-start the **Regina Stack Service**. The *stack* is a general-purpose data structure that Regina programs can use to pass or temporarily store data. (Chapter 11 describes the stack in detail.) For learning purposes, it's convenient to install this service.

That's it! You're done. Now, you can navigate to your Windows' installed Program List and see the **ReginaRexx** entry. Beneath it will appear its list of components.

Remember those computer benchmarks on page 5? Let's benchmark your computer and see how it compares. This will also verify that Regina is installed and working properly.

Select **ReginaRexx** from the Windows Program list. Under the **ReginaRexx** entry, pick **Regina Rexx Demos**. Then click on the program **Rexxcps**. The program will run in a command window and give you a benchmark you can directly compare to those on page 5.

So, you can run any Rexx program with the file extension of .rexx simply by double-clicking its filename.

Or you can run programs from the command line. Assuming you've navigated to the directory containing the program you want to run, (or that your PATH environmental variable contains that directory), you can enter its full filename to run it: rexxcps.rexx

The filename extension of <code>.rexx</code> tells Windows to run the file using Regina Rexx. Or you can run a file by explicitly invoking the Regina interpreter. Since you've already set the filename extension within Windows, you can either specify the full or partial filename. Either will work:

regina rexxcps.rexx or regina rexxcps

What about entering just the filename, but without its extension? Windows can't run this program because it doesn't know it should invoke Regina to run it. So this will **not** work: rexxcps

Installing Regina on Linux / Unix / BSD / macOS

There are several ways to install Regina on Linux and similar computers, such as those running macOS, Unix, and BSD. Perhaps the quickest and easiest is to use your distribution's *package manager*, its software interface for installing and removing software products.

Example package managers include Ubuntu's Software Center, the Synaptic Package Manager, APT, DNF, YUM, and ZYPP. The one you have available depends on which Linux distribution you run. All have easy-to-use GUI interfaces.

Most Linux package managers connect to large repositories of software products. Just search for Regina in that list of installable programs, and then select and install Regina using the package manager's graphical interface.

In most cases, the package manager will direct you to download two Regina files. One is for the interpreter itself, and the other is for its library. For example, using Synaptic Package Manager directed me to download the files regina-rexx, and its library, libregina3. (The exact file names may vary in your case.) The point is that the package manager will often automatically direct you to download more than a single file to install Regina. Just download these files and double-click to install them.

If you're on a Mac and use HomeBrew, you can install simply by: brew install regina-rexx

Installing Regina with your operating system's package manager is quick and easy. But it does have one possible downside. Sometimes repositories don't contain the latest release of the software.

Introduction to Scripting and Rexx

Thus, you may want to install Regina directly from its permanent project homepage at SourceForge.net. This is the same SourceForge webpage mentioned in the above discussion on "Installing Regina on Windows." The web address for downloading Regina files is: https://sourceforge.net/projects/regina-rexx/files/.

Once there, you can download the product documentation by selecting the directory **regina-documentation**, and the product itself by choosing **regina-rexx**.

We recommend downloading the two Regina manuals available under the **regina-documentation** directory. You may have need of them later.

In the **regina-rexx** directory, you'll want to select the current release. There you'll view a very long product list. Scroll down to the section labelled **Linux**. This reduces the downloads to a more manageable list.

To find the file to download, scroll through the list under the label **Operating System** and locate yours. (If you can't find an exact match, pick the one closest to your system. For example, someone running a Debian-based distribution that is not explicitly listed could use the Debian packages.)

Once you've located your operating system, ensure that the **Architecture** and **32bit** or **64bit** columns match your system. The rightmost column will then tell you which kind of package is involved: Debian, RPM, Alpine, or whatever.

Now you'll need to download and install two packages. One will be Regina's library package, while the second is the interpreter itself.

Here's an example. At the time of writing, I ran Linux Mint 21.2. I found that Linux Mint did not appear in the list of **Operating Systems** in the **Linux** section. A quick web search showed that Mint 21.x is based on Ubuntu 22. So I downloaded the files for Ubuntu 22. They worked fine.

Just as when you install via your Linux package manager, you'll likely need to install two files. I installed these two (the underscores contain the variable product release numbers):

```
libregina3______amd64-Ubuntu-22.04.deb regina-rexx_____amd64-Ubuntu-22.04.deb
```

As always with package manager files, you just double-click to install them. So first I installed the library .deb, then next, the **regina-rexx** package. Done!

Afterwards, you'll want to test the install to ensure it worked correctly. Let's run the benchmarking program that produced the table on page 5. You can benchmark your computer against those in the table.

The benchmarking program is called **rexxcps**. With the default Regina extension of <code>.rexx</code>, that means the full name of this program is <code>rexxcps.rexx</code>. Use your operating system's Search function to locate this program. Then open a terminal window, change to the directory where it resides, and execute it:

```
regina rexxcps or regina rexxcps.rexx
```

If Regina can't find the program to run it, you can run it by specifying that it resides in the current directory:

```
regina ./rexxcps or regina ./rexxcps.rexx
```

Manual Installation From Source Code

If the simple "package install" we describe above didn't work for you, or if you have an uncommon system not included in Regina's list of package installs, here we'll describe a simple, generic approach that will work for almost any Unix-derived operating system, including the macOS.

Where slight differences exist between systems, the Regina *Install Notes* will tell you what you need to know. These typically reside in **INSTALL*** or **README*** files. They download with the product. Be sure to read those instructions!

To install Regina under any Linux, Unix, BSD, or macOS operating system, use the root user ID and download the source file into an empty directory.

The source file will be compressed. It will thus end in one of these file name extensions: .tar.bz2,.tar.gz,.tar.gz,.tar.or.zip.To uncompress this file, just double-click on the file name.

If double-clicking produces a second compressed file (such as a .tar file), double-click on that file.

You'll know you're done decompressing when you see a long list of files being created. (So, decompressing might be either a one-step or two-step process, depending on what kind of compressed file you initially downloaded.)

Now, open a terminal window and navigate to the home directory into which you extracted Regina.

Look in the directory into which the files were extracted and find and read the Install Notes. They are usually in a file named INSTALL* or README*. These notes give operating system specific instructions you must follow to successfully install Regina.

The Install Notes will tell you that you need to enter these two commands as the root user id to the operating system:

```
./configure make install
```

These commands configure and install Regina. Since they compile source code, they require a C compiler to run. Almost all Linux, Unix, and BSD machines will have a C compiler present. If your system does not have one installed, download a free compiler from any of several sites including www.gnu.org. For macOS, go to the Apple Store and download Xcode.

The Install Notes will tell you if you need to set any environmental variables. Typically you'll need to set your PATH to include the location of the Regina binary. And, you'll need to point the LD_LIBRARY_PATH environmental variable to where Regina's shared library file resides (usually in /usr/local/lib). Again, refer to the install instructions! They'll give you the exact commands to run, which do vary by the operating system.

Finally, test your installation by running one of the Regina-provided demo scripts. Let's benchmark your system by running the benchmark program used in the table on page 5 of this chapter. You can compare your system's performance to the examples listed in that table.

The program to run is called rexxcps.rexx. You may have to look around in the Regina install directories to locate it. Change to that directory, then enter this to run the program:

```
regina rexxcps or regina ./rexxcps.rexx
```

If you have any problems with installing, check that your PATH variable properly includes the path of the Regina executable, and that the LD_LIBRARY_PATH or its equivalent properly points to Regina's shared library.

Also, remember that to run a program you may need to set its permission bits as executable:

```
chmod +x your program name.rexx
```

Testing Rexx Statements: Rexxtry

As well as the rexxcps program that benchmarks your computer's performance, another common program distributed with most Rexx interpreters is called rexxtry (if you can't find it, it's included with the sample programs for this book that you can download for free from www.RexxInfo.org).

Start this program from the command line, and you can enter various Rexx statements to it. It responds by executing the statement and returning its results to you.

Rexxtry can be useful to learn how Rexx works. Here's an example interaction where we test to see if Rexx treats single and double quotation marks as the same by entering a say instruction:

```
babs@dell1:~$ regina rexxtry
Try out Rexx statements interactively.

To end, enter EXIT

Rexxtry:
say 'Are single quotes' "the same as double quotes?"
Are single quotes the same as double quotes?
Rexxtry:
exit
```

Summary

This chapter lists the advantages of scripting in Rexx and suggests where Rexx is most useful. Given its power, flexibility, portability, and ease of use, Rexx is suitable for addressing a wide range of programming problems. The only situations where Rexx does not apply are those oriented toward "systems programming" and programs that demand totally optimized machine utilization.

Rexx distinguishes itself among scripting languages by combining ease of use with power. Rexx uses specific interpreter design techniques to achieve this combination. Rexx has simple syntax, minimal "special variables," no "default variables", and a case-insensitive free-format combined with a small, easily learned instruction set. Its many built-in functions, extensibility, and the ability to issue commands to the operating system and other external interfaces give Rexx power while retaining ease of use.

Ease of use is important even to highly experienced computer professionals because it reduces error rates and determines the life span of their code. Experienced developers leverage a quickly coded language like Rexx to achieve outstanding productivity.

The final part of this chapter showed how to download and install Regina Rexx under Windows, Linux, Unix, BSD, and macOS. This popular Rexx interpreter is a free, open-source product you can use to learn Rexx in the tutorial of the following chapters. Any other standard Rexx interpreter could be used as well. The next several chapters get you quickly up and running Rexx scripts through an example-based tutorial.

Test Your Understanding

- **1.** In what way is Rexx a *higher-level* language than compiled languages like C or C++? What's a *glue language*? Why is there an industry-wide trend towards scripting languages?
- **2.** Are developers required to code Rexx instructions starting in any particular column? In upper-or lowercase?
- **3.** Even if you're an expert programmer, why is ease of use still important?
- **4.** What are names of the two object-oriented Rexx interpreters? Will standard or *classic* Rexx scripts run under these OO interpreters without alteration?
- **5.** Does Rexx run on Android? How about departmental servers? PCs? Mainframes?
- **6.** What are the two key Rexx standards? Are these two standards almost the same or significantly different?
- **7.** Traditionally there is a trade-off between ease of use and power. What specific techniques does Rexx employ to gain both attributes and circumvent the trade-off?

Language Basics

Overview

This chapter describes the basic elements of Rexx. It discusses the simple components that make up the language. These include script structure, elements of the language, operators, variables, and the like. As a starting point, we explore a simple sample script. We'll walk through this script and explain what each statement means. Then we'll describe the language components individually, each in its own section. We'll discuss Rexx variables, character strings, numbers, operators, and comparisons.

By the end of this chapter, you'll know about the basic components of the Rexx language. You'll be fully capable of writing simple scripts and will be ready to learn about the language features explored more fully in subsequent chapters. The chapters that follow present other aspects of the language, based on sample programs that show its additional features. For example, topics covered in subsequent chapters include directing the logical flow of a script, arrays and tables, input and output, string manipulation, subroutines and functions, and the like. But now, let's dive into our first sample script.

A First Program

Had enough of your job? Maybe it's time to join the lucky developers who create computer games for a living! The complete Rexx program that follows is called the Number Game. It generates a random number between 1 and 10 and asks the user to guess it (well, okay, the playability is a *bit* weak. . . .) The program reads the number the user guesses and states whether the guess is correct.

```
/* The NUMBER GAME - User tries to guess a number between 1 and 10 */
/* Generate a random number between 1 and 10 */
the_number = random(1,10)
say "I'm thinking of number between 1 and 10. What is it?"
```

```
pull the_guess
if the_number = the_guess then
    say 'You guessed it!'
else
    say 'Sorry, my number was: ' the_number
say 'Bye!'
```

Here are two sample runs of the program:

```
C:\Regina\pgms>number_game.rexx
I'm thinking of number between 1 and 10. What is it?
4
Sorry, my number was: 6
Bye!

C:\Regina\pgms>number_game.rexx
I'm thinking of number between 1 and 10. What is it?
8
You guessed it!
Bye!
```

This program illustrates several Rexx features. It shows that you document scripts by writing whatever description you like between the symbols /* and */. Rexx ignores whatever appears between these *comment delimiters*. Comments can be isolated on their own lines, as in the sample program, or they can appear as *trailing comments* after the statement on a line:

```
the_number = random(1,10) /* Generate a random number between 1 and 10 */
```

Comments can even stretch across multiple lines in *box style*, as long as they start with /* and end with */:

Rexx is *case-insensitive*. Code can be entered in lowercase, uppercase, or mixed case; Rexx doesn't care. The if statement could have been written like this if we felt it were clearer:

```
IF the_number = the_guess THEN
    SAY 'You guessed it!'
ELSE
    SAY 'Sorry, my number was: ' the_number
```

The variable named the_number could have been coded as THE_NUMBER or The_Number. Since Rexx ignores case it considers all these as references to the same variable. The one place where case *does* matter is within *literals* or hardcoded character strings:

```
say 'Bye!' outputs: Bye!
```

while

```
say 'BYE!' displays: BYE!
```

Character strings are any set of characters occurring between a matched set of either single quotation marks (') or double quotation marks (").

What if you want to encode a quote within a literal? In other words, what do you do when you need to encode a single or double quote as part of the character string itself? To put a single quotation mark within the literal, enclose the literal with double quotation marks:

```
say "I'm thinking of number between 1 and 10. What is it?"
```

To encode double quotation marks within the string, enclose the literal with single quotation marks:

```
say 'I am "thinking" of number between 1 and 10. What is it?'
```

Rexx is a *free-format language*. The spacing is up to you. Insert (or delete) blank lines for readability, and leave as much or as little space between instructions and their operands as you like. Rexx leaves the coding style up to you as much as a programming language possibly can.

For example, here's yet another way to encode the if statement:

About the only situation in which spacing is *not* the programmer's option is when encoding a Rexx *function*. A function is a built-in routine Rexx provides as part of the language; you also may write your own functions. This program invokes the built-in function random to generate a random number between 1 and 10 (inclusive). The parenthesis containing the function argument(s) must immediately follow the function name without any intervening space. If the function has no arguments, code it like this:

```
the_number = random()
```

Rexx requires that the parentheses occur *immediately after* the function name to recognize the function properly.

The sample script shows that one does not need to *declare* or predefine variables in Rexx. This differs from languages like C++, Java, COBOL, or Pascal. Rexx variables are established at the time of their first use. The variable the_number is defined during the assignment statement in the example. Space for the variable the_guess is allocated when the program executes the pull instruction to read the user's input:

```
pull the_guess
```

In this example, the <code>pull</code> instruction reads the characters that the user types on the keyboard, until he or she presses the <ENTER> key, into one or more variables and automatically translates them to uppercase. Here the item the user enters is assigned to the newly created variable <code>the_guess</code>.


All variables in Rexx are variable-length character strings. Rexx automatically handles string length adjustments. It also manages numeric or data type conversions. For example, even though the variables the_number and the_guess are character strings, if we assume that both contain strings that represent numbers, one could perform arithmetic or other numeric operations on them:

```
their_sum = the_number + the_guess
```

Rexx automatically handles all the issues surrounding variable declarations, data types, data conversions, and variable length character strings that programmers must manually manage in traditional compiled languages. These features are among those that make it such a productive, high-level language.

Language Elements

Rexx consists of only two dozen instructions, augmented by the power of some 70 built-in functions. Figure 2-1 below pictorially represents the key components of Rexx. It shows that the instructions and functions together compose the core of the language, which is then surrounded and augmented by other features. A lot of what the first section of this book is about is introducing the various Rexx instructions and functions.

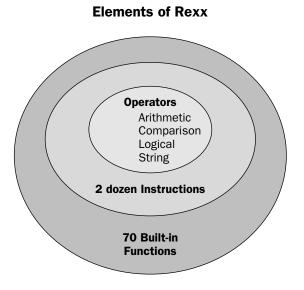

Other language components & features Figure 2-1

Of course, this book also provides a language reference section in the appendices, covering these and other aspects of the language. For example, Appendix B is a reference to all standard Rexx instructions, while Appendix C provides the reference to standard functions.

The first sample program illustrated the use of the instructions say, pull, and if. Rexx instructions are typically followed by one or more *operands*, or elements upon which they operate. For example, say is followed by one or more elements it writes to the display screen. The pull instruction is followed by a list of the data elements it reads.

The sample script illustrated one function, random. Functions are always immediately followed by parentheses, usually containing function *arguments*, or inputs to the function. If there are no arguments, the function must be immediately followed by empty parentheses (). Rexx functions always return a single result, which is then substituted into the expression directly in place of the function call. For example, the random number returned by the random function is actually substituted into the statement that follows, on the right-hand side of the equals sign, then assigned to the variable the_number:

```
the_number = random(1,10)
```

Variables are named storage locations that can contain values. They do not need to be declared or defined in advance, but are rather created when they are first referenced. You can declare or define all variables used in a program at the beginning of the script, but Rexx does not require this. Some programmers like to declare all variables at the top of their programs, for clarity, but Rexx leaves the decision whether or not to do this up to you.

All variables in Rexx are internally stored as variable-length strings. The interpreter manages their lengths and data types. Rexx variables are "typeless" in that their contents define their usage. If strings contain digits, you can apply numeric operations to them. If they do not contain strings representing numeric values, numeric operations don't make sense and will fail if attempted. Rexx is simpler than other programming languages in that developers do not have to concern themselves with data types.

Variable names are sometimes referred to as *symbols*. They may be composed of letters, digits, and characters such as . ! ? _ . A variable name you create must not begin with a digit or period. A *simple variable name* does not include a period. A variable name that includes a period is called a *compound variable* and represents an *array* or *table*. Arrays will be covered in Chapter 4. They consist of groups of similar data elements, typically processed as a group.

If all Rexx variables are *typeless*, how does one create a numeric value? Just place a string representing a valid number into a Rexx variable. Here are *assignment statements* that achieve this:

```
whole_number_example = 15
decimal_example = 14.2
negative_number = -21.2
exponential_notation_example = 14E+12
```

A *number* in Rexx is simply a string of one or more digits with one optional decimal point anywhere in the string. Numbers may optionally be preceded by their sign, indicating a postive or a negative number. Numbers may be represented very flexibly by almost any common notation. Exponential numbers may be represented in either engineering or scientific notation (the default is scientific). The following table shows examples of numbers in Rexx.

Number Type	Also Known As	Examples
Whole	Integer	'3' '+6' '9835297590239032'
Decimal	Fixed point	'0.3' '17.36 4 25'
Exponential	Realor	'1.235E+11' (scientific, one digit left of decimal point)
	Floating point	'171.123E+11' (engineering, 1 to 3 digits left of decimal)

Variables are assigned values through either assignment statements or input instructions. The assignment statement uses the equals sign (=) to assign a value to a variable, as shown earlier. The input instructions are the pull or parse instructions, which read input values, and the arg and parse arg instructions, which read command line parameters or input arguments to a script.

If a variable has not yet been assigned a value, it is referred to as *uninitialized*. The value of an uninitialized variable is the name of the variable itself in uppercase letters. This if statement uses this fact to determine if the variable no_value_yet is uninitialized:

```
if no_value_yet = 'NO_VALUE_YET' then
    say 'The variable is not yet initialized.'
```

Character strings or literals are any set of characters enclosed in single or double quotation marks (' or ").

If you need to include either the single or double quote within the literal, simply enclose that literal with the other *string delimiter*. Or you can encode two single or double quotation marks back to back, and Rexx understands that this means that one quote is to be contained within the literal (it knows the doubled quote does not terminate the literal). Here are a few examples:

```
literal= 'Literals contain whatever characters you like: !@#$%^&*()-=+~.<>?/_'
need_a_quote_mark_in_the_string = "Here's my statement."
same_as_the_previous_example = 'Here''s my statement.'
this_is_the_null_string = '' /*two quotes back to back are a "null string" */
```

In addition to supporting any typical numeric or string representation, Rexx also supports *hexadecimal* or base 16 numbers. *Hex strings* contain the upper- or lowercase letters A through F and the digits 0 through 9, and are followed by an upper- or lowercase X:

```
twenty_six_in_hexidecimal = '1a'x /* 1A is the number 26 in base sixteen */
hex_string = "3E 11 4A"X /* Assigns a hex string value to hex_string */
```

Rexx also supports *binary*, or base two strings. Binary strings consist only of 0s and 1s. They are denoted by their following upper- or lowercase B:

```
example_binary_string = '10001011'b
another_binary_string = '1011'B
```

Rexx has a full complement of functions to convert between regular character strings and hex and binary strings. Do not be concerned if you are not familiar with the uses of these kinds of strings in programming languages. We mention them only for programmers who require them. Future chapters will explain their use more fully and provide illustrative examples.

Operators

Every programming language has *operators*, symbols that indicate arithmetic operations or dictate that comparisons must be performed. Operators are used in calculations and in assigning values to variables, for example. Rexx supports a full set of operators for the following.

- □ Arithmetic
- Comparison
- Logical operators
- ☐ Character string concatenation

The arithmetic operators are listed in the following table:

Arithmetic Operator	Use
+	Addition
-	Subtraction
*	Multiplication
/	Division
%	Integer division — returns the integer part of the result from division
//	Remainder division — returns the remainder from division
**	Raise to a whole number power
+ (as a prefix)	Indicates a positive number
- (as a prefix)	Indicates a negative number

All arithmetic operators work as one would assume from basic high-school algebra, or from programming in most other common programming languages. Here are a few examples using the less obvious operators:

```
say (5 % 2) /* Returns the integer part of division result. Displays: 2 */ say (5 // 2) /* Returns the remainder from division. Displays: 1 */ say (5 ** 2) /* Raises the number to the whole power. Displays: 25 */
```

Remember that because all Rexx variables are strings, arithmetic operators should only be applied to variables that evaluate to valid numbers. Apply them only to strings containing digits, with their optional decimal points and leading signs, or to numbers in exponential forms.

Numeric operations are a major topic in Rexx (as in any programming language). The underlying principle is this—the Rexx standard ensures that the same calculation will yield the same results even when run under different Rexx implementations or on different computers. Rexx provides an exceptional level of machine- and implementation-independence compared with many other programming languages.

If you are familiar with other programming languages, you might wonder how Rexx achieves this benefit. Internally, Rexx employs decimal arithmetic. It does not suffer from the approximations caused by languages that rely on floating point calculations or binary arithmetic.

The only arithmetic errors Rexx gives are *overflow* (or *underflow*). These result from insufficient storage to hold exceptionally large results.

To control the number of significant digits in arithmetic results, use the numeric instruction. Sometimes the number of significant digits is referred to as the *precision* of the result. Numeric precision defaults to nine digits. This sample statement illustrates the default precision because it displays nine digits to the right of the decimal place in its result:

```
say 2 / 3 /* displays 0.666666667 by default */
```

This example shows how to change the precision in a calculation. Set the numeric precision to 12 digits by the numeric instruction, and you get this result:

Rexx preserves trailing zeroes coming out of arithmetic operations:

```
say 8.80 - 8 /* displays: 0.80 */
```

If a result is zero, Rexx always displays a single-digit 0:

```
say 8.80 - 8.80 /* displays: 0 */
```

Chapter 7 explores computation further. It tells you everything you need to know about how to express numbers in Rexx, conversion between numeric and other formats, and how to obtain and display numeric results. We'll defer further discussion on numbers and calculations to Chapter 7.

Comparison operators provide for numeric and string comparisons. These are the operators you use to determine the equality or inequality of data elements. Use them to determine if one data item is greater than another or if two variables contain equal values.

Since every Rexx variable contains a character string, you might wonder how Rexx decides to perform a character or numeric comparison. The key rule is: *if both terms involved in a comparison are numeric, then the comparison is numeric*. For a numeric comparison, any leading zeroes are ignored and the numeric values are compared. This is just as one would expect.

If either term in a comparison is other than numeric, then a *string comparison* occurs. The rule for string comparison is that leading and trailing blanks are ignored, and if one string is shorter than the other, it is padded with trailing blanks. Then a character-by-character comparison occurs. String comparison is case-sensitive. The character string ABC is not equal to the string Abc. Again, this is what one would normally assume.

Rexx features a typical set of comparison operators, as shown in the following table:

Comparison Operator	Meaning
=	Equal
\= ¬=	Not equal
>	Greater than
<	Less than
>= \< ¬<	Greater than or equal to, not less than
<= \> ¬>	Less than or equal to, not greater than
>< <>	Greater than or less than (same as not equal)

In Rexx comparisons, if a comparison evaluates to TRUE, it returns 1. A FALSE comparison evaluates to 0. Here are some sample numeric and character string comparisons and their results:

```
'37' = '37'  /* TRUE - a numeric comparison */
'0037'= '37'  /* TRUE - numeric comparisons disregard leading zeroes */
'37' = '37'  /* TRUE - blanks disregarded */
'ABC' = 'Abc'  /* FALSE - string comparisons are case-sensitive */
'ABC' = 'ABC'  /* TRUE- preceding & trailing blanks are irrelevant */
'' = '  /* TRUE- null string is blank-padded for comparison */
```

Rexx also provides for *strict comparisons* of character strings. *In strict comparisons, two strings must be identical to be considered equal*—leading and trailing blanks count and no padding occurs to the shorter string. Strict comparisons only make sense in string comparisons, not numeric comparisons. Strict comparison operators are easily identified because they contain doubled operators, as shown in the following chart:

Strict Comparison Operator	Meaning
==	Strictly equal
\== ¬==	Strictly not equal
>>	Strictly greater than
<<	Strictly less than
>>= \<< ¬<<	Strictly greater than or equal to, strictly not less than
<<= \>> ¬>>	Strictly less than or equal to, strictly not greater than

Here are sample strict string comparisons:

Logical operators are sometimes called *Boolean operators* because they apply *Boolean logic* to the operands. Rexx's logical operators are the same as the logical operators of many other programming languages. This table lists the logical operators:

Logical Operator	Meaning	Use
&	Logical AND	TRUE if both terms are true
	Logical OR	TRUE if either term is true
&&	Logical EXCLUSIVE OR	TRUE if either (but not both) terms are true
¬ or \ (as a prefix)	Logical NOT	Changes TRUE to FALSE and vice versa

Boolean logic is useful in if statements with multiple comparisons. These are also referred to as *compound comparisons*. Here are some examples:

```
if ('A' = var1) & ('B' = var2) then
    say 'Displays only if BOTH comparisons are TRUE'

if ('A' = var1) | ('B' = var2) then
    say 'Displays if EITHER comparison is TRUE'

if ('A' = var1) && ('B' = var2) then
    say 'Displays if EXACTLY ONE comparison is TRUE'

if \('A' = var1\) then say 'Displays if A is NOT equal to var1'
```

Concatenation is the process of pasting two or more character strings together. Strings are appended one to the end of the other. *Explicitly* concatenate strings by coding the *concatenation operator* | | . Rexx also automatically concatenates strings when they appear together in the same statement. Look at these instructions executed in sequence:

The second say instruction shows *concatenation through abuttal*. A literal string and a variable appear immediately adjacent to one another, so Rexx concatenates them without any intervening blank.

Contrast this to the last say instruction, where Rexx concatenates the literal and variable contents, but with one blank between them. If there are one or more spaces between the two elements listed as operands to the say instruction, Rexx places exactly one blank between them after concatenation.

Given these three methods of concatenating strings, individual programmers have their own preferences. Using the concatenation operator makes the process more explicit, but it also results in longer statements to build the result string.

Rexx has four kinds of operators: arithmetic, comparison, logical, and concatenation. And there are several operators in each group. If you build a statement with multiple operators, how does Rexx decide which operations to execute first? The order can be important. For example:

4 times 3, then subtract 2 from the result is 10

Perform those same operations with the same numbers in a different order, and you get a different result:

3 subtract 2, then multiple that times 4 yields the result of 4

Both these computations involve the same two operations with the same three numbers but the operations occur in different orders. They yield different results.

Clearly, programmers need to know in what order a series of operations will be executed. This issue is often referred to as the operator *order of precedence*. The order of precedence is a rule that defines which operations are executed in what order.

Some programming languages have intricate or odd orders of precedence. Rexx makes it easy. Its order of precedence is the same as in conventional algebra and the majority of programming languages. (The only minor exception is that the prefix *minus operator* always has higher priority than the exponential operator).

From highest precedence on down, this lists Rexx's order of precedence:

Prefix operators	+	-	\						
Power operator	**								
Addition and subtraction	+	-							
Concatenation	by i	nterv	venin	g blan	ks		by abu	ttal	
Comparison operators	=	=	==	>	<	>=	<=	and the of	thers
Logical AND	&								
Logical OR									
EXCLUSIVE OR	&&								

If the order of precedence is important to some logic in your program, an easy way to ensure that operations occur in the manner in which you expect is to simply enclose the operations to perform first in parentheses. When Rexx encounters parentheses, it evaluates the entire expression when that term is required. So, you can use parentheses to guarantee any order of evaluation you require. The more deeply nested a set of parentheses is, the higher its order of precedence. The basic rule is this: when Rexx encounters expressions nested within parentheses, it works from the innermost to the outermost.

To return to the earlier example, one can easily ensure the proper order of operations by enclosing the highest order operations in parentheses:

```
say (4 * 3) - 2 /* displays: 10 */
```

To alter the order in which operations occur, just reposition the parentheses:

```
say 4 * (3 - 2) /* displays: 4 */
```

Summary

This chapter briefly summarizes the basic elements of Rexx. We've kept the discussion high level and have avoided strict "textbook definitions." We discussed variable names and how to form them, and the difference between simple variable names and the compound variable names that are used to represent tables or arrays. We discussed the difference between strings and numbers and how to assign both to variables

We also listed and discussed the operators used to represent arithmetic, comparison, logical, and string operations. We gave a few simple examples of how the operators are used; you'll see many more, real-world examples in the sample scripts in the upcoming chapters.

The upcoming chapters round out your knowledge of the language and focus in more detail on its capabilities. They also provide many more programming examples. Their sample scripts use the language elements this chapter introduces in many different contexts, so you'll get a much better feel for how they are used in actual programming.

Test Your Understanding

- **1.** How are comments encoded in Rexx? Can they span more than one line?
- **2.** How does Rexx recognize a function call in your code?
- **3.** Must variables be declared in Rexx as in languages like C++, Pascal, or Java? How are variables established, and how can they be tested to see if they have been defined?
- **4.** What are the two instructions for basic screen input and output?
- **5.** What is the difference between a *comparison* and *strict comparison*? When do you use one versus the other? Does one apply strict comparisons to numeric values?
- **6.** How do you define a numeric variable in Rexx?

Control Structures

Overview

Program logic is directed by what are called *control structures* or *constructs* — statements like if- then-else, do-while, and the like. Rexx offers a complete set of control structures in less than a dozen instructions.

Rexx fully supports *structured programming*, a rigorous methodology for program development that simplifies code and reduces programmer error. Invented and defined by such experts as Edsger Dijkstra and Edward Yourdon, structured programming restricts control structures to a handful that permit single points of entry and exit to code blocks. The "golden rule" of structured programming mandates that there should be only a single entry point and a single exit point from any code block, such as a do loop. Goto's and unstructured entries and exits are prohibited.

Structured programming encourages *modularity* and reduces complex spaghetti code to short, readable, sections of self-contained code. Small, well-documented routines mean greater clarity and fewer programmer errors. While developer convenience sometimes leads to unstructured code ("Well... it made sense when I wrote it!"), structured, modular code is more readable and maintainable.

We recommend structured programming; nearly all of the examples in this book are structured. But we note that, as a powerful programming language, Rexx includes instructions that permit unstructured coding if desired.

This chapter discusses how to write structured programs with Rexx. We start by listing the Rexx instructions used to implement structured constructs. Then, we describe each in turn, showing how it is used in the language through numerous code snippets. At appropriate intervals, we present complete sample scripts that illustrate the use of the instructions in structured coding.

The latter part of the chapter covers the Rexx instructions for unstructured programming. While we don't recommend their general use, there are special situations in which these instructions are highly convenient. Any full-power scripting language requires a full set of instructions for controlling logical flow, including those that are unstructured.


Structured Programming in Rexx

As we've mentioned, structured programming consists of a set of constructs that enforce coding discipline and organization. These are implemented in Rexx through its basic instructions for the control of program logic. The basic constructs of structured programming and the Rexx instructions used to implement them are listed in this table:

Structured Construct	Rexx Instruction
PROCESS	Any set of instructions, executed one after another. The exit or return instructions end the code composing a program or routine.
IF-THEN. IF-THEN-ELSE	if
DO. DO-WHILE	do
CASE	select
CALL	call

Figure 3-1 illustrates the structured constructs.

The Structured Control Constructs

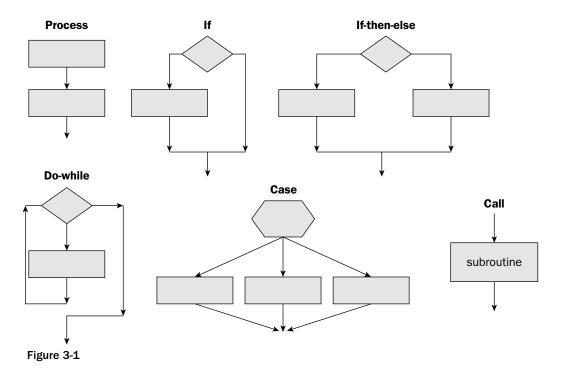

IF Statements

if statements express conditional logic. Depending on the evaluation of some condition, a different branch of program logic executes. if statements are common to nearly all programming languages, and they represent the basic structured instruction for conditional logic. The two basic formats of the Rexx if instruction are:

```
IF expression THEN instruction
and

IF expression THEN instruction ELSE instruction
```

Rexx evaluates the *expression* to 1 if it is TRUE, and 0 if it is FALSE. Here are sample if statements:

```
/* A simple IF statement with no ELSE clause */
if input = 'YES' then
   say 'You are very agreeable'
/* In this example the IF statement tests a two-part or "compound" condition. The
   SAY instruction executes only if BOTH conditions are TRUE, because of the
   AND (&) operator */
if input = 'YES' & second_input = 'YES' then
   say 'You are doubly agreeable today'
^{\prime\prime} This compound IF is true if EITHER of the two expressions are TRUE ^{\ast\prime}
if input = 'YES' | second_input = 'YES' then
   say 'You are singly agreeable today'
/* Here's a simple IF statement with an ELSE clause.
   The DATATYPE function verifies whether the variable INPUT contains a NUMBER */
if datatype(input,N) then
   say 'Your input was a number'
else
   say 'Your input was not numeric'
/* This coding is NOT recommended in Rexx, though it is popular in languages
   like C or C++ or many Unix shell languages...
   Variable VAR must be exactly 1 or 0 \, -- or else a syntax error will occur! \, */
if (var) then
   say 'VAR evaluated to 1'
else
   say 'VAR evaluated to 0'
```

To execute more than a single instruction after either the then or else keywords, you *must* insert the multiple instructions between the keywords do and end. Here is an example:

```
if datatype(input,N) then do
    say 'The input was a number'
    status_record = 'VALID'
    end
else do
    say 'The input was NOT a number'
    status_record = 'INVALID'
end
```

The do-end pair groups multiple instructions. This is required when you encode more than one instruction as a logic branch in an if instruction. Notice that you must use the do-end pair for either branch of the if instruction when it executes more than a single statement. In other words, use the do-end pair to group more than a single instruction on either the then or the else branches of the if instruction.

You can nest if statements, one inside of another. If you nest if statements very deeply, it becomes confusing as to which else clause matches which if instruction. The important rule to remember is that an else clause is always matched to the nearest unmatched if. Rexx ignores indentation, so how you indent nested if statements has no effect on how Rexx interprets them.

The following code includes comments that show where the programmer sees the end of each if instruction. He or she includes these for documentation purposes only, since Rexx ignores comments (regardless of what the comments may say).

```
if age => 70 then
    say 'Person MUST start taking mandatory IRA distributions'
else
    if age >= 65 then
        say 'Person can receive maximum Social Security benefits'
    else
        if age >= 62 then
            say 'Person may elect reduced Social Security benefits'
        else
            say 'Person is a worker bee, not a beneficiary'
        /* end-if */
    /* end-if */
/* end-if */
```

Here's another style in which to code this example. This series of nested if statements is sometimes referred to as an *if-else-if ladder*. The first logic branch that evaluates to TRUE executes:

```
if age => 70 then
    say 'Person MUST start taking mandatory IRA distributions'
else if age >= 65 then
    say 'Person can receive maximum Social Security benefits'
else if age >= 62 then
    say 'Person may elect reduced Social Security benefits'
```

Some languages provide special keywords for this situation, but Rexx does not. (For example, some Unix shell languages provide the elif keyword to represent Rexx's else if pair). Remember to code a do - end pair whenever more than one instruction executes within a branch of the if instruction.

The if-else-if ladder embodies another structured construct often referred to the *CASE construct*. In a CASE construct, a set of conditions are tested, then one logic branch is selected from among several.

Rexx provides the select instruction to create CASE logic, as will be explained later. In Rexx you can either choose an if-else-if ladder or the select instruction to encode CASE logic.

Sometimes, you'll encounter a coding situation where you want to code a logic branch that performs no action. In this case, code the Rexx nop instruction. "nop" is a traditional computer science abbreviation or term that means "no operation." The nop instruction is a placeholder that results in no action. Here is an example. The nop instruction in this code ensures that no action is taken when the if statement condition evaluates to TRUE:

DO Statements

The do instruction groups statements together and optionally executes them repetitively. It comes in several forms, all of which we'll explore in this chapter. do instructions permit repetitive execution of one or more statements. They are the basic way you code program "loops" in Rexx.

You are already familiar with the simple do-end pair used to group multiple instructions. Here is the generic representation of how this is coded:

```
DO instruction_list END
```

Use the do-end group when you must execute multiple instructions in a branch of the if instruction, for example. Here's another form of the do instruction that repetitively executes a group of instructions while the condition in the expression is TRUE:

```
DO WHILE expression
instruction_list
END
```

This coding example shows how to use this generic format. It employs a do while to call a subroutine exactly 10 times:

```
j = 1
do while j <= 10
    call sub_routine
    j = j + 1
end</pre>
```

The do instruction is flexible and offers other formats for devising loops. The preceding loop could also be coded with a simpler form of the do instruction:

```
do 10
   call sub_routine
end
```

Or, the example could be coded using a controlled repetitive loop:

```
do j = 1 to 10 by 1
   call sub_routine
end
```

The phrase by 1 is unnecessary because Rexx automatically increases the do loop *control variable* by 1 if this phrase is not coded. But the keyword by could be useful in situations where you want to increase the *loop counter* by some other value:

```
do j = 1 to 20 by 2
   call sub_routine
end
```

In addition to the to and by keywords, for may be used establish another limit on the loop's execution if some other condition does not terminate it first. for is like to, in that Rexx checks it prior to each iteration through the loop. to, by, and for may be coded in any order. In this example, the for keyword limits the do loop to three executions:

```
do j = 1 to 100 by 1 for 3
    say 'Loop executed:' j 'times.' /* Ends with: 'Loop executed: 3 times.' */
end
```

You may alter the loop control variable yourself, directly, while inside of the do loop, but this is not a recommended programming practice. It is confusing, and there is always an alternative way to handle such a situation from the logical standpoint. We recommend always using the loop control variable only for controlling an individual loop, and only altering that variable's value through the do instruction condition test.

Rexx also contains unstructured loop control instructions such as leave, iterate, and signal, which we cover later in the section of this chapter on unstructured control constructs. At that time we also cover the do until and do forever forms of do loops, which also fall outside the rules of structured programming.

A Sample Program

This program prompts the user to input a series of words, one at a time. The program identifies words that are four characters long, and concatenates them into a list, which it then displays. The program illustrates a basic do loop, using it to read input from the user. It also shows how to use the if instruction in determining the lengths of the words the user enters.

If you were to enter this sentence to the program (one word at a time):

```
now is the time for all good men to come to the aid of their country
```

the program's output would be:

```
Four letter words: time good come
```

Here's the sample program:

```
FOUR LETTER WORDS:
/*
                                                                         * /
/*
      This program identifies all four letter words in the
      input and places them into an output list.
four_letter_words = ''
                           /* initialize to no 4 letter words found yet */
say "Enter a word: "
                          /* prompt user to enter 1 word
parse pull wordin .
                         /* the period ensures only 1 word is read in
do while wordin \= ''
  if length(wordin) = 4 then
     four_letter_words = four_letter_words wordin
  say "Enter a word: "
                        /* read the next word in
                                                                         * /
  parse pull wordin .
end
say 'Four letter words:' four_letter_words
                                                 /* display output
```

The do while loop in this script provides the control structure for the program to prompt the user and read one word after that prompt. The do while loop terminates when the user declines to enter a word—after the user just presses the <ENTER> key in response to the program's prompt to Enter a word: When the user presses the <ENTER> key without entering a word, this statement recognizes that fact and terminates the do while loop:

```
do while wordin \= ''
```

Recall that the pull instruction reads an input and automatically translates it to uppercase. This program uses parse pull to read an input *without* the automatic translation to uppercase:

```
parse pull wordin .
```

The period ensures that only the first word is accepted should the user enter more than one. This use of the period is a convention in Rexx, and it's about the only example of *syntax-based coding* in the entire language. You could achieve the same effect by coding:

```
parse pull wordin junk
```

The first word entered by the user is parsed into the variable wordin, while any remaining words entered on the input line would be placed into the variable named junk.

The program uses the length function to determine whether the word the user entered contains four letters. If so, the next statement concatenates the four letter word into a list it builds in the variable named four_letter_words.

```
if length(wordin) = 4 then
  four_letter_words = four_letter_words wordin
```

The assignment statement relies on the fact that Rexx automatically concatenates variables placed in the same statement, with one space between each. An alternative would have been to use the explicit concatenation operator:

```
four_letter_words = four_letter_words || wordin
```

But in this case the output would have been:

```
Four letter words: timegoodcome
```

Explicit concatenation requires explicitly splicing in a blank to achieve properly spaced output:

```
four_letter_words = four_letter_words || ' ' || wordin
```

After the user is done entering words, the program displays the output string through the following statement. Since this is the last statement coded in the program, the script terminates after issuing it:

```
say 'Four letter words:' four_letter_words /* display output */
```

SELECT Statements

The CASE construct tests a series of conditions and executes the set of instructions for the first condition that is TRUE. Rexx implements the CASE construct through its select instruction. The select instruction tests expressions and executes the logic branch of the first one that evaluates to TRUE. Here is the generic format of the select instruction:

```
SELECT when_list [ OTHERWISE instruction_list ] END
```

The otherwise branch of the select instruction executes if none of the prior when_list conditions are found to be TRUE. Note that it is possible to code a select instruction without an otherwise keyword, but if none of the when_list conditions execute, an error results. We strongly recommend coding an otherwise section on every select statement.

The Rexx select instruction provides more control than the same CASE construct in some other programming languages because you can encode any expression in the when clause. Some languages only permit testing the value of a specified variable.

Here's a simple coding example using select:

```
select
  when gender = 'M' then
    say 'Gender is male'
```

```
when gender = 'F' then do
    say 'Gender is female'
    female_count = female_count + 1
    end
    otherwise
    say 'Error -- Gender is missing or invalid'
    say 'Please check input record'
end    /* this END pairs with the SELECT instruction itself */
```

If the value in the variable gender equals the character M, the first logic branch executes. If the value is F, the group of instructions associated with the second when clause runs. If neither case is true, then the instructions following the otherwise keyword execute.

Notice that an instruction_list follows the otherwise keyword, so if you code more than one statement here you do not need to insert them in a do-end pair. Contrast this to the when groups, which do require a do-end pair if they contain more than a single instruction. Don't forget to encode the final end keyword to terminate the select statement.

CALL Statements

All programming languages provide a mechanism to invoke other scripts or routines. This allows one script, referred to as the *caller*, to run another, the *subroutine*. Rexx's call instruction invokes a subroutine, where the subroutine may be one of three kinds:

- ☐ *Internal* Consists of Rexx code residing in the same file as the caller.
- □ Built-in One of the Rexx built-in functions.
- ☐ External Code residing in a different file than the invoking script. An external subroutine may be another Rexx script, or it may be written in any language supporting Rexx's interface.

The subroutine may optionally return one value to the caller through the Rexx *special variable* named result. (Rexx has only a handful of special variables and result is one of them). Of course, you can have the subroutine send back one or more results by changing the values of variables it has access to. We'll explore all the ways in which caller and subroutines or functions can communicate in detail in Chapter 8, which is on subroutines and modularity. For now, we'll just focus our discussion on the call instruction.

Subroutines and *functions* are very similar in Rexx. The one difference is that a function *must* return a value to the caller by its return instruction, where a subroutine may elect do so.

The following sample program illustrates the call instruction by invoking an internal routine as a subroutine. The subroutine is considered *internal* because its code resides in the same file as that of the program that calls it. The program subroutine squares a number and returns the result.

The main program reads one input number as a *command-line argument* or *input parameter*. To run the program and get the square of four, for example, you enter this line to specify the command-line argument:

```
square.rexx 4
```

Or, you may start the program by entering a line like this:

```
regina square 4
```

Recall that the first example given earlier *implicitly* invokes the Rexx interpreter, while the second example *explicitly* invokes it. The command-line argument follows the name of the Rexx script you want to run. Here it's a single value, 4, but other programs might have either many or no command-line arguments.

The program responds to either of the above commands with:

```
You entered: 4 Squared it is: 16
```

Here's the program code:

The main program or *driver* uses the arg instruction to read the command-line argument into variable number_in. As with the pull and parse pull instructions, encode a period (.) at the end of this statement to eliminate any extraneous input:

```
arg number_in . /* retrieve the command-line argument */
```

The call instruction names the internal routine to invoke and passes the variable number_in to that routine as its input. The subroutine uses the arg instruction to read this parameter (exactly as the main routine did). Here is the encoding of the call instruction. The first parameter names the subroutine or function to run, while each subsequent parameter is an input argument sent to the subroutine. In this case, the call instruction passes a single argument named number_in to the subroutine named square_the_number:

```
call square_the_number number_in
```

The first line of the subroutine identifies it as the routine named square_the_number. Notice that a colon follows its name on the first line of the subroutine — this identifies a *label* in Rexx. An internal

subroutine starts with the routine's name in the form of a label. The procedure instruction on the first line of the subroutine ensures that only the arguments passed to the subroutine will be accessable from within it. No other variables of the calling routine are viewable or changeable by this subroutine. Here is the first executable line of the subroutine:

```
square_the_number: procedure
```

The subroutine reads the number passed into it from its caller by the arg instruction. Then, the subroutine returns a single result through its return instruction. Here is how this line is encoded. Notice that Rexx evaluates the expression (squaring the number) before executing the return instruction:

```
return the_number * the_number
```

The caller picks up this returned value through the *special variable* named result. The main routine displays the squared result to the user through this concatenated display statement:

```
say 'You entered:' number_in ' Squared it is:' result
```

This displays an output similar to this to the user:

```
You entered: 2 Squared it is: 4
```

The driver ends with the instruction <code>exit</code> 0. This unconditionally ends the script with a *return code*, or returned value, of 0. The last statement of the internal subroutine was a <code>return</code> instruction. <code>return</code> passes control back to the calling routine, in this case passing back the squared number. If the subroutine is a function, a <code>return</code> instruction is required to pass back a value.

There is much more to say about subroutines and modular program design. We leave that discussion to Chapter 8. For now, this simple script illustrates the structured CALL construct and how it can be used to invoke a subroutine or function.

Another Sample Program

Here's a program that shows how to build menus and call subroutines based on user input. This program is a fragment of a real production program, slimmed down and simplified for clarity. The script illustrates several instructions, including do and select. It also provides another example of how to invoke internal subroutines.

The basic idea of the program is that it displays a menu of transaction options to the user. The user picks which transaction to execute. The program then executes that transaction and returns to the user with the menu. Here is how it starts. The program clears the screen and displays a menu of options to the user that looks like this:

```
Select the transaction type by abbreviation:
    Insert = I
    Update = U
    Delete = D
    Exit = X
Your choice => _
```

Based on the user's input, the program then calls the appropriate internal subroutine to perform an Insert, Update, or Delete transaction. (In the example, these routines are "dummied out" and all each really does is display a message that the subroutine was entered). The menu reappears until the user finally exits by entering the menu option 'x'.

Here's the complete program:

```
/*
   MENU:
                                                                      */
                                                                      */
/*
/*
       This program display a menu and performs updates based
                                                                      */
       on the transaction the user selects.
                                                                      */
'cls'
                                 /* clear the screen (Windows only)
tran_type = ''
do while tran_type \= 'X'
                                 /* do until user enters 'X'
                                                                      * /
   say 'Select the transation type by abbreviation:'
   say
  say '
          Insert = I '
   say '
          Update = U '
   say '
          Delete = D '
   say '
           Exit = X '
   say 'Your choice => '
   pull tran_type .
     when tran_type = 'I' then
        call insert_routine
     when tran_type = 'U' then
        call update_routine
      when tran_type = 'D' then
        call delete_routine
      when tran_type = 'X' then do
        say
         say 'Bye!'
         end
      otherwise
         say
         say 'You entered invalid transaction type:' tran_type
         say 'Press <ENTER> to reenter the transaction type.'
         pull .
      end
end
exit 0
/* INSERT_ROUTINE goes here
INSERT_ROUTINE: procedure
   say 'Insert Routine was executed'
   return 0
/* UDPATE_ROUTINE goes here
                                                                      * /
UPDATE_ROUTINE: procedure
```

The first executable line in the program is this:

```
'cls' /* clear the screen (Windows only) */
```

When the Rexx interpreter does not recognize a statement as part of the Rexx language, it assumes that it is an operating system command and passes it to the operating system for execution. Since there is no such command as cls in the Rexx language, the interpreter passes the string cls to the operating system for execution as an operating system command.

cls is the Windows command to "clear the screen," so what this statement does is send a command to Windows to clear the display screen. Of course, this statement makes this program *operating-system-dependent*. To run this program under Linux or Unix, this statement should contain the equivalent command to clear the screen under these operating systems, which is clear:

```
'clear' /* clear the screen (Linux/Unix only) */
```

Passing commands to the operating system (or other external environments) is an important Rexx feature. It provides a lot of power and, as you can see, is very easy to code. Chapter 14 covers this topic in detail.

Next in the program, a series of say commands paints the menu on the user's screen:

```
say
say 'Select the transation type by abbreviation:'
say
say ' Insert = I '
say ' Update = U '
say ' Delete = D '
say ' Exit = X '
say
say 'Your choice => '
```

A say instruction with no operand just displays a blank line and can be used for vertically spacing the output on the user's display screen.

The script displays the menu repeatedly until the user finally enters 'x' or 'X'. The pull command's automatic translation of user input to uppercase is handy here and eliminates the need for the programmer to worry about the case in which the user enters a letter.

The select construct leads to a call of the proper internal routine to handle the transaction the user selects:

```
select
      when tran_type = 'I' then
         call insert_routine
      when tran_type = 'U' then
        call update_routine
      when tran_type = 'D' then
         call delete_routine
      when tran_type = 'X' then do
         say
         say 'Bye!'
         end
      otherwise
         say 'You entered invalid transaction type: ' tran_type
         say 'Press <ENTER> to reenter the transaction type.'
         pull .
      end
```

The when clause where the user enters 'x' or 'x' encloses its multiple instructions within a do-end pair. The otherwise clause handles the case where the user inputs an invalid character. The final end in the code concludes the select instruction.

Remember that the logic of the select statement is that the first condition that evaluates to TRUE is the branch that executes. In the preceding code, this means that the program will call the proper subroutine based on the transaction code the user enters.

Following the select instruction, the code for the main routine or driver ends with an exit 0 statement:

```
exit 0
```

This delimits the code of the main routine from that of the routines that follow it and also sends a return code of 0 to the environment when the script ends. An exit instruction is required to separate the code of the main routine from the subroutines or functions that follow it.

The three update routines contain no real code. Each just displays a message that it ran. This allows the user to verify that the script is working. These subroutines cannot access any variables within the main routine, because they have the procedure instruction, and no variables are passed into them. Each ends with a return 0 instruction:

```
return 0
```

While this sample script is simple, it shows how to code a menu for user selection. It also illustrates calling subroutines to perform tasks. This is a nice modular structure that you can expand when coding menus with pick lists. Of course, many programs require graphical user interfaces, or GUIs. There are a variety of free and open-source GUI interfaces available for Rexx scripting. GUI programming is an advanced topic we'll get to in a bit. Chapter 16 shows how to program GUIs with Rexx scripts.

Unstructured Control Instructions

Rexx is a great language for structured programming. It supports all the constructs required and makes structured programming easy. But the language is powerful and flexible, and there are times when unstructured flow of control is necessary (or at least highly convenient). Here are the unstructured instructions that alter program flow in Rexx:

Instruction	Use
do until	A form of the do instruction that implements a <i>bottom-drive loop</i> . Unlike do-while, do-until will always execute the code in the loop at least one time, because the condition test occurs at the bottom of the loop.
do forever	Creates an <i>endless loop</i> , a loop that executes forever. This requires an <i>unstructured exit</i> to terminate the loop. Code the unstructured exit by either the leave, signal or exit instruction.
iterate	Causes control to be passed from the current statement in the do loop to the bottom of the loop.
leave	Causes an immediate exit from a do loop to the statement following the loop.
signal	Used to trap <i>exceptions</i> (specific program error conditions). Can also be used to unconditionally transfer control to a specified label, similarly to the GOTO instruction in other programming languages.

Figure 3-2 below illustrates the unstructured control constructs.

The do until and do forever are two more forms of the do instruction. do until implements a bottom-driven loop. Such a loop always executes at least one time. In contrast, the do while checks the condition *prior* to entering the loop, so the loop may or may not be executed at least once. do until is considered unstructured and the do while is preferred. Any logic that can be encoded using do until can be coded using do while—you just have to think for a moment to see how to change the logic into a do while.

Let's look at the difference between do while and do until. This code will not enter the do loop to display the message. The do while tests the condition prior to executing the loop, so the loop never executes. The result in this example is that the say instruction never executes and does not display the message:

Do-until Do-Forever Iterate

The Un-Structured Control Constructs

Figure 3-2

If we replace the do while loop with a do until loop, the code will execute through the loop one time, printing the message once. This is because the condition test is applied only at the bottom of the loop. A do until loop will always execute one time, even if the condition test on the do until is false, because the test is not evaluated until after the loop executes one time. The result in this example is that the say instruction executes once and displays one output line:

Signal

Leave

do forever creates an *endless loop*. You *must* have some unstructured exit from within the loop or your program will never stop! This example uses the leave instruction to exit the endless loop when j = 4. The leave instruction transfers control to the statement immediately following the end that terminates the do loop. In this example, it breaks the endless loop and transfers control to the say statement immediately following the loop:

```
end say 'The above LEAVE instruction transfers control to this statement'
```

Another way to terminate the endless loop is to encode the exit instruction. exit ends a program unconditionally (even if a subroutine is executing or if execution is nested inside of a do loop). Control returns to the environment (the operating system) with the optional string encoded on the exit statement passed up.

What return code you can pass to the environment or operating system using the exit instruction depends on what that operating system accepts. Some systems accept only return codes that are numeric digits between 0 and 127. If your script returns any other string, it is translated into a 0. Other operating systems will accept whatever value you encode on the exit instruction.

Here's an example. The following code snippet is the same as the previous one, which illustrates the leave instruction, but this time when the condition j=4 is attained, the script unconditionally exits and returns 0 to the environment. Since the script ends, the say instruction following the do forever loop never executes and does not display its output:

```
j = 1
do forever
   /* do some work here */
   j = j + 1
   if j = 4 then
       exit 0  /* unconditionally exits and passes '0' back to the environment */
end
say 'this line will never be displayed'  /* code EXITs, never reaches this line
*/
```

Another instruction for the unstructured transfer of control is signal. The signal instruction acts much like the GOTO statement of other programming languages. It transfers control directly out of any loop, CASE structure, or if statement directly to a Rexx label. A *label* is simply a symbol immediately followed by a colon. This sample code snippet is similar to that we've seen earlier, except that this time the signal instruction transfers control to a program label. So, once j = 4 and the signal instruction execute, control is transferred to the program label and the say instruction displays its output line:

```
j = 1
do forever
  /* do some work here */
  j = j + 1
  if j = 4 then
      signal my_routine /* unconditionally go to the label MY_ROUTINE */
end

/* other code here gets skipped by the SIGNAL instruction */
my_routine:
  say 'SIGNAL instruction was executed, MY_ROUTINE entered...'
```

signal differs from the GOTO of some other languages in that it terminates all active control structures in which it is encoded. You could not transfer control to another point in a loop using it, for example.

Duplicate labels are allowed within Rexx scripts, but control will always be transferred to the one that occurs first. We recommend that all labels in a program be unique within a program for the sake of readability.

In an entirely different role, the signal instruction is also used to capture or "trap" errors and special conditions. Chapter 10 discusses this in detail. This is a special mechanism within the Rexx language designed to capture unusual error conditions or "exceptions."

The last unstructured instruction to discuss is the iterate instruction. The iterate instruction causes control to be passed from the current statement in the do loop to the bottom of the loop. In this example, the iterate instruction ensures that the say instruction never executes. The if instruction's condition evaluates to TRUE every time that statement is encountered, so the iterate instruction reruns the do loop and the say instruction never runs:

```
j = 1
do until j = 4
  /* do some work here */
  j = j + 1
  if j > 1 then iterate
    say 'This line is never displayed!' /* this line will never execute */
end
```

Summary

This chapter summarizes Rexx's structured and unstructured control constructs. These include the if, do, select, call, exit, and return instructions for structured programming, and the unstructured iterate, leave, and signal instructions. The do until and do forever forms of the do instruction are also unstructured.

For more background on why structured programming is beneficial -- especially for larger and more complicated programs -- refer to the works of Edward Yourdon and Edsger Dijkstra.

Use the instructions this chapter covers to direct conditional logic as in most other programming languages. This chapter presented many small code snippets to illustrate how to use the instructions that control program logic. Subsequent chapters will provide many more examples of the use of these instructions. These upcoming examples demonstrate the instructions in the more realistic context of complete programs. They will make the use of the instructions for the control of logical flow much clearer.

Test Your Understanding

- **1.** Why is structured programming recommended? What Rexx instructions implement structured programming? How do subroutines and functions support the benefits of structured programming?
- 2. How does Rexx determine which if instruction each else keyword pairs with?
- **3.** Name two ways that a script can test for the end of user input.
- **4.** What are the differences between *built-in*, *internal*, and *external* subroutines? What is the difference between a *function* and a *subroutine*?

- **5.** What are the values of TRUE and FALSE in Rexx?
- **6.** What is the danger in coding a do forever loop? How does one address this danger?
- **7.** What are the two main functions of the signal instruction? How does the signal instruction differ from the GOTO command of many other programming languages?
- **8.** What is the difference between the do-while and do-until instructions? Why use one versus the other? Are both allowed in structured programming?

Arrays

Overview

Every programming language provides for *arrays*. Sometimes they are referred to as *tables*. This basic data structure allows you to build lists of "like elements," which can be stored, searched, sorted, and manipulated by other basic programming operations.

You'll sometimes hear arrays referred to as *compound variables* or *stem variables* in Rexx. We'll explain why in just a moment.

Rexx's implementation of arrays is powerful but easy to use. Arrays can be of any *dimensionality*. They can be a one-dimensional *list*, where all elements in the array are of the same kind. They can be of two dimensions, where there exist pairs of entries. In this case, elements are manipulated by two subscripts (such as I and J). Or, arrays can be of as many dimensions as you like. While Rexx implementations vary, the usual constraint on the size and dimensionality of array is memory. This contrasts with other programming languages that have specific, language-related limitations on array size.

Rexx arrays may be *sparse*. That is, not every array position must have a value or even be initialized. There can be empty array positions, or *slots*, between those that do contain data elements. Or arrays can be *dense*, in which consecutive array slots all contain data elements. Figure 4-1 below pictorially shows the difference between sparse and dense arrays. Dense arrays are also sometimes called *nonsparse* arrays.

Arrays may be initialized by a single assignment statement. But just like other variables, arrays are defined by their first use. You do not have to predefine or preallocate them. Nor must you declare a maximum size for an array. The only limitation on array size in most Rexx implementations is imposed by the amount of machine memory.

Dense versus Sparse Arrays

Element 1			
Element 2			
Element 3			
Element 4			
<empty></empty>			

<empty>
Element 1
<empty>
<empty>
Element 2

A Dense Array

. .

A Sparse Array

Figure 4-1

You can refer to individual elements within a Rexx arrray by numeric subscripts, as you do in other programming languages. Or, you can refer to array elements by variables that contain character strings. Rexx then uses those character strings as indexes into the array. For this reason, Rexx arrays are sometimes termed *content addressable*. They can be used as a form of *associative memory*, in that they create an association between two values. This permits innovative use of arrays in problem solving. We'll explain what these terms mean and why are they important in more detail later in the chapter. We'll even give several examples of how content addressable memory structures are useful in resolving programming problems. For now, remember that the subscripts you encode to access individual array elements can be either numeric or string variables.

Like many scripting languages, Rexx lacks complex data structures such as lists, trees, records, and the like. These are unnecessary because by understanding content-addressable arrays it is easy to build these structures. Rexx arrays provide the foundation to build any imaginable data structure. We'll show you how later in this chapter. First, let's explore the basics of how to code arrays and process their data elements.

The Basics

To approach the subject of arrays, let's review the way variable names are created. The basis for Rexx arrays are compound variable names or *symbols*. So far we've seen several kinds of symbols within Rexx:

- ☐ Constants Literal strings or other values that cannot be changed.
- ☐ Simple symbols Variable names that do not begin with a digit and do not contain any embedded period(s).
- ☐ *Compound symbols* The basis for arrays. Like simple symbols, they do not begin with a digit. However, they contain one or more periods.

Simple symbols are synonymous with variable names, as we have known them thus far, while *compound* symbols contain one or more periods. Compound symbols are the basis for arrays.

In compound symbols, the *stem* is the part of the name up to and including the first period. The stem is sometimes called a *stem variable*. The *tail* comprises one or more symbols separated by periods.

Here are a few examples:

- ☐ list.j—list is the name of an array or table.
- \Box list.j—list. is the stem of the array. Note that the stem name includes the period.
- □ books.j.k—books. is the stem, j.k is the tail.j and k are two subscripts.

In these examples, Rexx substitutes in the value of the variables j and k before referencing into the arrays. These values can be numbers, but they do not have to be. Rexx allows indexing into an array based on any variable value you encode, whether it is numeric or a string value.

Here is a sample series of statements that refer to an array element based on a string value in a variable. The first line below initializes all elements in an array to the null string (represented by two back-to-back quotation marks). The second line assigns a value to a specific array element. The last two statements show how a character string provides a subscript into the array to retrieve that data element from the array:

It is probably worth noting that Rexx uppercases the string cherry into CHERRY in the subscript assignment statement above because that character string is not enclosed in quotation marks. Rexx also uppercases variable names such as fruit.cherry into FRUIT.CHERRY internally. Had we coded subscript_string = 'cherry' as the third line in the sample code, it would not work properly. The array tail is uppercased internally by Rexx so the subscript string used for finding the data element must also be uppercase.

What happens if you accidentally reference an array with a subscript that is not yet initialized? Recall that in Rexx an uninitialized variable is always its own name in uppercase. So, if my_index has not yet been assigned a value, my_array.my_index resolves to MY_ARRAY.MY_INDEX. Oops! This is probably not what the programmer intended.

Initialize the array as a whole by referring to its stem. The dimensionality of the array does not matter to this operation. We saw one example of initializing an entire array in one line of the sample code. Here are some more examples:

```
list. = 0 /* initialize all possible entries in the array LIST to 0 */books. = '' /* initialize all possible entries in BOOKS array to null string */
```

You *cannot* perform other kinds of operations on entire arrays by single statements — in most Rexx implementations. For example, these statements *are invalid* and result in errors:

To process all the elements in an array, use a do loop. This works as long as the array is indexed or subscripted by numeric values, and each position, or slot, in the array contains a value. To process all the elements in the array, you must keep track of the maximum subscript you use. There is no Rexx function that returns the largest numeric subscript you've used for an array. Here is an example that shows how to process all the elements of an array. In this code, each contiguous array position contains an element, and the array subscript is numeric:

Another technique for array processing is to initialize the array to zeroes for numeric values, or to the empty string or *null string* for character string entries (represented by two back-to-back quotation marks ''). Then process the array starting at the beginning until you encounter an entry set to the initialization value. Here's sample code that processes all elements of an array based on this approach:

```
array_name. = '' /* initialize all array elements to some nonoccurring value */

/* place elements into the array here */

/* This code processes all elements in the array. */
do j = 1 while array_name.j <> ''
    say "Here's an array element:" array_name.j
end
```

If you take this approach, be sure that the value used for initialization never occurs in the data you place into the array!

This approach also assumes a *nonsparse*, or *dense*, *array* — one in which the positions in the array have been filled consecutively without skipping array slots or positions. For a sparse array, we recommend storing the largest numeric subscript you use in a variable for future reference. Obviously, you cannot simply process a sparse array until you encounter the array initialization value because some positions within the array may not contain data items. In processing a sparse array, your code will have to be able

to distinguish between array positions that contain valid values and those that do not. For this reason, it is useful to initialize all sparse array elements to some unused default value (such as the null string or zeroes) prior to using the array.

In many programming languages, you must be concerned with what the subscript of the first entry in a table is. Is the first numeric subscript 0 or 1? In Rexx, the first subscript is whatever you use! So, input the first array element into position 0 or 1 as you prefer:

```
array_name.0 = 'first element'
or
array_name.1 = 'first element'
```

Just be sure that whatever choice you make you remember and that you remain consistent in your approach. This flexibility is a handy feature of content-addressable arrays.

As an informal convention, many Rexx programmers store the number of array elements in position 0, then start storing data elements in position 1:

Assuming that the array is not sparse and the index is numeric, process the entire array with code like this:

```
do j = 1 to array_name.0
    say "Here's an array element:" array_name.j
end
```

Placing the number of array elements into position 0 in the array is not required and is strictly an informal convention to which many Rexx programmers adhere. But it's quite a useful one, and we recommend it.

A Sample Program

This sample program illustrates basic array manipulation. The program defines two arrays. One holds book titles along with three descriptors that describe each book. The other array contains keywords that will be matched against the three descriptors for each book.

The user starts the program and inputs a "weight" as a command line parameter. Then the program lists all books that have a count of descriptors that match a number of keywords at least equal to the weight. This algorithm is called *weighted retrieval*, and it's often used in library searches and by online bibliographic search services.

Here's the entire program. The main concepts to understand in reviewing it are how the two arrays are set up and initialized at the top of the program, and how they are processed in the body. The do loops that process array elements are similar to the ones seen previously.

```
/* FIND BOOKS:
                                                                     */
/*
                                                                     * /
/*
       This program illustrates basic arrays by retrieving book
/*
       titles based on keyword weightings.
                     /* initialize both arrays to all null strings
keyword. = ''
title. = ''
/* the array of keywords to search for among the book descriptors
                                                                     * /
                     ; keyword.2 = 'computers'
keyword.1 = 'earth'
keyword.3 = 'life'
                     ; keyword.4 = 'environment'
/* the array of book titles, each having 3 descriptors
                                                                      */
title.1 = 'Saving Planet Earth'
 title.1.1 = 'earth'
  title.1.2 = 'environment'
  title.1.3 = 'life'
title.2 = 'Computer Lifeforms'
 title.2.1 = 'life'
  title.2.2 = 'computers'
  title.2.3 = 'intelligence'
title.3 = 'Algorithmic Insanity'
  title.3.1 = 'computers'
  title.3.2 = 'algorithms'
  title.3.3 = 'programming'
arg weight . /* get number keyword matches required for retrieval
say 'For weight of' weight 'retrieved titles are:' /* output header */
do j=1 while title.j <> ''
                                             /* look at each book
  count = 0
   do k=1 while keyword.k <> ''
                                             /* inspect its keywords */
     do l=1 while title.j.l <> ''
        if keyword.k = title.j.l then count = count + 1
      end
   end
   if count >= weight then /* display titles matching the criteria */
      say title.j
end
```

The program shows that you can place more than one Rexx statement on a line by separating the statements with a semicolon. We use this fact to initialize the searchable keywords. Here's an example with two statements on one line:

```
keyword.1 = 'earth' ; keyword.2 = 'computers'
```

To implement the weighted-retrieval algorithm, the outermost do loop in the script processes each book, one at a time. This loop uses the variable j as its subscript:

```
do j=1 while title.j <> '' /* look at each book */
```

The do loop could have included the phrase by 1, but this is not necessary. Rexx automatically defaults to incrementing the loop counter by 1 for each iteration. If we were to encode this same line and explicitly specify the increment, it would appear like this. Either approach works just fine:

```
do j=1 by 1 while title.j <> '' /* look at each book */
```

The loop that processes each book, one at a time, is the outermost loop in the code. The next, inner loop uses k as its control variable and processes all the keywords for one book:

```
do k=1 while keyword.k <> '' /* inspect its keywords */
```

The innermost loop uses 1 for loop control and inspects the three descriptors for each book title. This code totals how many of each book's descriptors match keywords:

```
do l=1 while title.j.l <> ''
   if keyword.k = title.j.l then count = count + 1
end
```

If the count or *weight* this loop totals is at least equal to that input as the command line argument, the book matches the retrieval criteria and its title is displayed on the user's screen.

This script is written such that the programmer does not need to keep track of how many variables any of the arrays contain. The while keyword processes items in each do loop until a null entry (the null string) is encountered. This technique works fine as long as these two conditions pertain:

- ☐ The script initializes each array to the null string.
- ☐ Each position or slot in the arrays is filled consecutively.

Its approach to array processing makes the program code independent of the number of books and keywords it must process. This flexibility would allow the same algorithm to process input from files, for example. So, it would be easy to eliminate the static assignment statements in this program and replace them with variable input read in from one or more input files. You can see that the approach this script takes to array processing provides great flexibility.

The script demonstrates that nested array processing and simple logic can provide sophisticated weighted retrieval by applying search terms to item descriptors. From the standpoint of Rexx arrays, it shows how to nest array-processing do loops and terminate those loops when all items in the arrays have been processed.

Associative Arrays

The sample program indexed its tables by numeric subscripts. The script processed the arrays simply by incrementing the numeric subscripts during do loops. But Rexx also allows subscripts to be variables that contain character strings. Let's discuss this approach now.

Associative arrays subscript entries by character strings. You can use them to create *key-value pairs*. Here's an example. We've created an array of months called the month array. In initializing this array, we've placed multiple assignment statements per line. We accomplish this by separating individual statements by semicolons:

```
month.1 = january ; month.2 = february ; month.3 = march ;
month.4 = april ; month.5 = may ; month.6 = june ;
month.7 = july ; month.8 = august ; month.9 = september ;
month.10 = october ; month.11 = november ; month.12 = december ;
```

This array associates months with their ordinal positions in the calendar. For example, if you want to know what the 12th month is, referencing month.12 returns DECEMBER. We've established a group of keys that return specific values.

Combined with the previous array, the following code returns the calendar position of any given month:

```
say 'Enter the calendar position of the month you want displayed...'
pull monthly_position .
say 'Month number' monthly_position 'is' month.monthly_position
```

If you enter 4, the script returns APRIL:

```
Enter the calendar position of the month you want displayed...

4

Month number 4 is: APRIL
```

Notice that the month is returned in uppercase letters. This is because the month names were not enclosed in quotation marks when the array values were initialized. So Rexx uppercased them. To retain lowercase alphabetics for the month names, simply enclose the initialization strings in quotation marks (as was done in the sample program that performed the weighted-retrieval algorithm). Here's how to initialize data elements to retain the lowercase month names:

```
month.1 = 'january' ; month.2 = 'february' ; month.3 = 'march' ;
```

The month array in this problem represents a set of *key-value pairs*. A key-value pair is a simple data structure that can be used to resolve a wide range of programming problems. Let's take a look at a complete sample script that illustrates their use.

A Sample Associative Array Program

Here's a simple sample script that uses an associative array. It is a telephone area code lookup program. The user enters the name of a town in the Chicago area, and the program returns the area code of that suburb. Here's what interaction with the script looks like:

```
D:\Regina\pgms>regina code_lookup.rex
For which town do you want the area code?
Chicago
The area code for CHICAGO is 312
For which town do you want the area code?
Homewood
The area code for HOMEWOOD is 708
For which town do you want the area code?
Cincinnati
Town CINCINNATI is not in my database
For which town do you want the area code?
Zion
The area code for ZION is 847
For which town do you want the area code?
<user presses <ENTER> key and leaves the program>
```

Here's the program code:

```
/* CODE LOOKUP:
/*
      Looks up the areacode for the town the user enters.
              /* preinitialize all entries to the null string */
area.Chicago = 312 ; area.Wrigleyville = 773
area.Homewood = 708 ; area.Geneva = 630
                    ; area.Schaumburg = 847
area.Zion = 847
do while town <> ''
  say 'For which town do you want the area code?'
  pull town .
  if town <> '' then do
     if area.town = ''
        then say 'Town' town 'is not in my database'
        else say 'The area code for' town 'is' area.town
  end
end
```

The program first initializes the entire area array to the null string by the single assignment statement. It sets all entries in that array to the null string (represented by two back-to-back single quotation marks ''):

```
area. = '' /* preinitialize all entries to the null string */
```

Next, six assignment statements set the area codes for specific towns. This will be the *lookup table* for the area codes. This lookup table could be considered a list of key-value pairs:

```
area.Chicago = 312  ; area.Wrigleyville = 773
area.Homewood = 708  ; area.Geneva = 630
area.Zion = 847  ; area.Schaumburg = 847
```

The program prompts the user to enter the name of a town:

```
say 'For which town do you want the area code?' pull town .
```

If the array element <code>area.town</code> is equal to the null string, then this array slot was not assigned a value – the program tells the user that the town is not in the area code database. Otherwise, <code>area.town</code> represents an area code value that the script reports to the user:

```
if area.town = ''
   then say 'Town' town 'is not in my database'
   else say 'The area code for' town 'is' area.town
```

The program reports the desired area codes until the user enters the null string to the prompt to terminate interaction. The user enters the null string simply by pressing the <ENTER> key without entering anything.

As in the previous programming example, be sure that you understand the use of case in this sample script. The town is returned in uppercase because the tail of each array element is uppercased by Rexx. Rexx views variable names internally as uppercased. The comparison with the town name the user types in works properly because the pull instruction automatically translates the city name he or she enters into all uppercase letters.

To summarize, this script shows how arrays can be subscripted by *any* value (not just numeric values). This supports *content-addressable* or *associative arrays*, a data structure concept that applies to a wide range of programming problems. Here we've used it to implement a simple lookup table based on keyvalue pairs. Associative memory can also be applied to a wide range of more complex programming problems. The next section discusses some of these applications.

Creating Data Structures Based on Arrays

The Code Lookup program creates a *lookup table*, a simple data structure implemented as a one-dimensional array. By a *one-dimensional array* we mean that the table is accessed using only a single subscript. An array's *dimensionality* is defined by the number of subscripts coded to it.

array_name.1—A one-dimension array
 array_name.1.1—A two-dimension array
 array_name.1.1.1—A three-dimension array

Arrays can have any number of dimensions to create more detailed associations. This forms the basis for creating complex data structures. Subscript strings essentially become *symbolic pointers*, access points that allow you to create content-addressable data structures. Scanning a table for a value becomes unnecessary because content-addressability provides direct access to the desired entry. Using these principles you can create data structures such as lists, trees, records, C-language *structs*, and symbolic pointer-based data structures.

In the sample program that retrieved book titles, the array named keywords is one-dimensional (it uses just a single subscript). The data structure it represents is a *list*. The script implements its algorithm through *list processing*.

In that script, the array named title has elements that are referred to either by one subscript (the book title) or by two (the descriptors associated with each title). There is a hierarchical relationship — each book has a set of descriptors. The data structure represented here is a *tree*. The logic that searches the three descriptors for a specific book performs *leaf-node processing*.

Each *root node* has the same number of *leaves* (descriptors), so we have a *balanced tree*. But Rexx does not require developers to declare in advance the number of elements an array will hold, nor that the tree be balanced. We could have any number of descriptors per book title, and we could have any number of leaves per tree. The algorithm in the program easily processes a variable number of array items and handles data structures composed of unknown numbers of elements. The Find Books program manages a *balanced tree*, or *B-tree*, but could as well handled an *unbalanced skewed tree*.

In the sample program that retrieved area codes, towns and their area codes were associated by means of *key-value pairs*. This kind of data structure is widely used, for example, in lookup tables, "direct access" databases, and Perl programming. It forms the conceptual basis of the popular embedded open source database Berkeley DB. Even such a simple association can underlie high-powered application solutions.

Figure 4-2 pictorially illustrates some of the basic data structures that can easily be created by using arrays. That Rexx supports such a wide range of data structures, without itself requiring complex syntax, shows how a "simple" language can implement sophisticated processing. This is the beauty of Rexx: power based on simplicity.

Example Data Structures Based on Arrays

			_
Element 1	Key 1	Value 1	
Element 2	Key 2	Value 2	
Liement 2	Key 3	Value 3	b.1
Element 3	Key 4	Value 4	b.1.1
A Simple List or Look-up Table	Key-va	lue Pairs	b.1.1.1 b.1.1.2 b.2
b.1 b.1.1 b.1.2 b.2 b.2.1 b.2.2 b.3 b.3.1 b.3.2	b.2 b	.1.1 .2.1 .2.2 .2.3	b.2.1 b.2.2 b.2.3 b.3 b.3.1 b.3.1.1 A Multi-level Tree (unbalanced)
Balanced Tree Un-Balanced Tree			

Figure 4-2

Summary

Rexx supports content-addressable arrays that can be of any dimensionality. These arrays can be initialized as an entity by referring to the array stem. However, other kinds of whole-array manipulation based on the stem are not permitted in standard Rexx. Array sizes do not have to be declared or defined prior to use, and sizes are limited only by the size of memory in most Rexx implementations.

Arrays provide a way to build the more powerful data structures that compiled languages sometimes offer and scripting languages like Rexx "lack." Symbolic pointers form the basis of content-addressable data structures. Using- content-addressable arrays, you can easily build lists, trees, records, structures, and other variable-length and variably sized data structures. Rexx simplifies the programmer's task because no complicated language elements are necessary to implement advanced data structures. The syntax remains clean and simple, even while the data structures one builds become powerful and flexible.

Test Your Understanding

- **1.** How many subscripts can be applied to an array? How many dimensions may an array have? Must array subscripts be numeric values?
- **2.** What operations can you perform on a group of variables by referring to an array stem? What operations are not permitted on a stem?
- **3.** Describe two ways to process all the elements in an array. Does Rexx keep track of the number of elements in an array?
- **4.** What kinds of data structures can be defined based on arrays? Describe three and explain how to create each.

Input and Output

Overview

Input/output, or *I/O*, is how a program interacts with its environment. Input may come from what a user types in, an input file, or another program. Program output might be written to the display, to an output file, or to a communication mechanism such as a pipe. These are just a few of the possibilities.

Rexx provides a simple-to-use, high-level I/O interface. At the same time, Rexx aims for standard-ization and portability across platforms. Unfortunately, this latter goal is difficult to achieve—I/O is inherently *platform-dependent*, because it relies upon the file systems and drivers the operating system provides for data management. These vary by operating system.

This chapter describes the Rexx I/O model at a conceptual level. Then it explores examples and how to code I/O. The last part of the chapter discusses some of the problems that any programming language confronts when trying to standardize I/O across platforms, some of the trade-offs involved, and how this tension has been resolved in Rexx and its many implementations.

Rexx provides an I/O model that is easy to use and as portable as possible. Section II explores the I/O extensions that many versions of Rexx offer for more sophisticated (but less portable) I/O. Chapter 15 illustrates database I/O and how to interface scripts to popular database management systems such as SQL Server, Oracle, DB2, and MySQL.

The Conceptual I/O Model

Rexx views both input and output as *streams* — a sequence of *characters*, or *bytes*. The characters in the stream have a sequence, or order. For example, when a Rexx script reads an input stream, the characters in that stream are presented to the script in the order in which they occur in the stream.


A stream may be either *transient* or *persistent*. A transient stream could be the characters a user enters through the keyboard. They are read; then they are gone. A persistent stream has a degree

of permanency. Characters in a file, for example, are stored on disk until someone deletes the file containing them. Files are persistent.

For persistent streams only, Rexx maintains two separate, independent *positions*: a *read position* and a *write position*. The type of access to the persistent stream or file determines which of these positions make logical sense. For example, for a file that a script reads, the read position is important. For a file that it writes, the write position is important.

The read and write positions for any one file may be manipulated by a script independently of one another. They might be set or altered *explicitly*. Normally, they are altered *implicitly* as the natural result of read or write operations.

Programs can process streams in either of two *modes*: character by character or line by line. Rexx provides a set of functions to perform I/O in either manner. These are typically referred to as *character-oriented I/O* and *line-oriented I/O*. Figure 5-1 summarizes these two basic I/O modes.

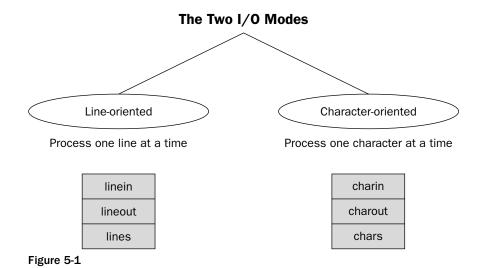

A stream is typically processed in either one of the two I/O modes or the other. However, it is possible to intermix character- and line- oriented processing on a single stream.

Like many programming languages, Rexx recognizes the concept of *standard input* and *standard output*. The former is the default location from which input is read, and the latter is the default location to which output is written. These defaults are applied when no specific name is encoded in a Rexx statement as the target for an I/O operation. Standard input is normally the keyboard, and standard output is the display screen. Standard Rexx does not include the concept of a *standard error stream*.

As with variables, Rexx files are defined by their first use. They are not normally predefined or "declared." In standard Rexx, one does not explicitly "open" files for use as in most programming languages. Files do not normally need to be closed; they are closed automatically when a script ends. For most situations, this high level of automation makes Rexx I/O easy to use and convenient. For complex

programs with many files, a situation in which memory is limited, or when a file needs to be closed and reopened, Rexx provides a way to explicitly close files.

Line-Oriented Standard I/O

With this conceptual background on how input/output works in Rexx, we can describe standard Rexx I/O. Let's start with I/O that considers the stream to consist of *lines*, or line-oriented I/O. Here the three basic functions for standard line I/O:

- ☐ linein—Reads one line from an input stream. By default this reads the line from default standard input (usually the keyboard).
- lineout Writes a line to an output stream. By default this writes to standard output (usually the display screen). Returns 0 if the line was successfully written or 1 otherwise.
- ☐ lines Returns either 1 or the number of lines left to read in an input stream (which could be 0).

This sample script reads all lines in an input file, and writes those containing the phrase PAYMENT OVERDUE to an output file. (A form of this simple script actually found a number of lost invoices and saved a small construction company tens of thousands of dollars!):

To run this program, enter the names of its two arguments (the input and output files) on the command line:

```
regina find_payments.rexx invoices_in.txt lost_payments_list_out.txt
```

In this code, the parse arg instruction is to arg as parse pull is to pull. In other words, it performs the exact same function as its counterpart but does not translate input to uppercase. arg and parse arg both read input arguments, but arg automatically translates the input string to uppercase, whereas parse arg does not. This statement reads the two input arguments without automatically translating them to uppercase:

```
parse arg filein fileout /* get 2 filenames */
```

This statement:

```
do while lines(filein) > 0
```

shows how Rexx programmers often perform a read loop. The lines function returns a positive number if there are lines to read in the input file referred to. It returns 0 if there are none, so this is an easy way to test for the end of file. The do loop, then, executes repeatedly until the end of the input file is encountered.

The next program statement reads the next input line into the variable input_line. It reads one *line* or record, however the operating system defines a *line*:

The if statement uses the string function pos, which returns the position of the given string if it exists in the string input_line. Otherwise, it returns 0. So, if the character string PAYMENT OVERDUE occurs in the line read in, the next line invokes the lineout function to write a line to the output file:

There are two ways to code the lineout function:

```
call lineout fileout,input_line
or
feedback = lineout(fileout,input_line)
```

The recommended approach uses the call instruction to run the lineout function, which automatically sets its return string in the special variable result. If the variable result is set to 0, the line was successfully written, and if it is set to 1, a failure occurred. The sample script opts for clarity of illustration over robustness and does not check result to verify the success of the write.

The second approach codes lineout as a function call, which returns a result, which is then assigned to a variable. Here we've assigned the function return code to the variable feedback. You'll sometimes see programmers use the variable rc to capture the return code, because rc is the Rexx special variable that refers to return codes:

```
rc = lineout(fileout,input_line)
```

Now, here's something to be aware of. This coding *will not work*, because the return string from the lineout function has nowhere to go:

```
lineout(fileout,input_line) /* Do NOT do this, it will fail! */
```

What happens here? Recall that the return code from a function is placed right into the code as a replacement for the coding of the function. So after this function executes, it will be converted to this if successful:

0

A standard rule in Rexx is that whenever the interpreter encounters something that is not Rexx code (such as instructions, expressions to resolve, or functions), Rexx passes that code to the operating system for execution. So, Rexx passes 0 to the operating system as if it were an operating system command! This causes an error, since 0 is not a valid operating system command.

We'll discuss this in more detail in Chapter 14, when we discuss how to issue operating system commands from within Rexx scripts. For now, all you have to remember is that you should either call a function or make sure that your code properly handles the function's returned result.

The lines function works slightly differently in different Rexx implementations. It always returns 0 if there are no more lines to read. But in some Rexx interpreters it returns 1 if there are more lines to read, while in others it returns the actual number of lines left to read. The latter produces a more useful result but could cause Rexx to perform heavy I/O to determine this value.

The ANSI standard clarified this situation in 1996. Today ANSI-standard Rexx has two options:

- □ lines(file_name, C) Count. Returns the number of lines left to read.
- ☐ lines(file_name, N) Normal. Returns 1 if there are lines left to read.

For backward compatibility, the second case is the default. A true ANSI-standard Rexx will return 1 if you encode the lines function without specifying the optional parameter, and there are one or more lines left to read in the file. However, some Rexx implementations will return the actual number of lines left to read instead of following the ANSI specification.

Standard Rexx does not permit explicitly opening files, but how about closing them? Rexx closes files automatically when a script ends. For most programs, this is sufficient. The exception is the case where a program opens many files and uses an exceptional amount of memory or system resources that it needs to free when it is done processing files. Another example is the situation in which a program needs to close and then reopen a file. This could happen, for example, if a program needed to sequentially process the same file twice.

How a file is closed or how its buffers are flushed is implementation-dependent. Most Rexx interpreters close a file by encoding a lineout function without any parameters beyond the filename. Just perform a write operation that writes no data:

The stream function is another way to close files in many implementations. stream allows you to either:

Check the state of a file

or

Issue various commands on that file

The status check is ANSI standard, but the specific commands one can issue to control a file are left to the choice of the various Rexx implementations. Here's how to issue an ANSI-standard status check on a file:

The status values returned are those shown in the following table:

Stream Status	Meaning
READY	File is good for use.
NOTREADY	An I/O operation attempt will fail.
ERROR	File has been subjected to an invalid operation.
UNKNOWN	File status is unknown.

The commands you can issue through the stream function are completely dependent on which Rexx interpreter you use. Regina Rexx allows you to open the file for reading, writing, appending, creating, or updating; to close or flush the file, and to get its status or other file information. Regina's stream function also allows scripts to manually move the file pointers, as would be useful in directly accessing parts of a file.

The file pointers may be moved in several ways. All Rexx scripts that perform input and/or output do this *implicitly*, as the result of normal read and write operations. Scripts can also move the file pointers *explicitly*... but these operations are implementation-specific. Some Rexx interpreters, such as Regina, enable this via stream function commands, while others provide C-language-style seek and tell functions that go beyond the Rexx standard. Read your Rexx's documentation to see what your interpreter supports. Part II goes into how specific Rexx interpreters provide this feature and offers sample scripts.

The lineout, charout, linein, and charin functions provide the most standardized way to explicitly control file positions, but care is advised. Most scripts just perform standard read and write operations and let Rexx itself manage the file read and write positions. Later in this chapter we discuss alternatives for those cases where you require advanced file I/O.

Character-Oriented Standard I/O

The previous section looked at line-oriented I/O, where Rexx reads or writes a line of data at a time. Recall from the introduction that Rexx also supports *character-oriented I/O*, input and output by individual characters. Here the three basic functions for standard character I/O:

charin—Returns one or more characters read from an input stream. By default this reads one character from default standard input (usually the keyboard).

- □ charout Writes zero or more characters to an output stream. By default this writes to standard output (usually the display screen). Returns 0 if all characters were successfully written. Or, it returns the number of characters remaining after a failed write.
- output (usually the display screen) Returns 0 if all characters were successfully written. Or, it returns the number of characters remaining after a failed write.
- chars Returns either 1 or the number of characters left to read in an input stream (which could be 0).

This sample program demonstrates character-oriented input and output. It reads characters or *bytes*, one by one, from a file. It writes them out in hexadecimal form by using the charout function. The script is a general-purpose "character to hexadecimal" translator. Here is its code:

The script illustrates the use of the chars function to determine when the input file contains no more data to process:

```
do j=1 while chars(filein) > 0 /* do while a character to read */
```

This character-oriented chars function is used in a manner similar to the line-oriented lines function to identify the *end-of-file* condition. Figure 5-2 below summarizes common ways to test for the end of a file.

Testing for End of File




Figure 5-2

Common end of file tests -

- · The "lines" function
- · The "chars" function

Less common end of file tests -

- Scan for a known value (eg, user enters a null line to the script, or a value like "END" or "EXIT")
- The "stream" function
- · SIGNAL ON NOTREADY error condition trap

The script uses the conversion function c2x to convert each input character into its hexadecimal equivalent. This displays the byte code for these characters:

```
out string = ' ' c2x(charin(filein)) /* convert it to hex */
```

This script illustrates the charout function twice. The first time it includes a comma to replace the output filename, so the character is written to the default output device (the display screen). The second charout function includes an output filename and writes characters out to that file:

Let's take a look at some sample output from this script. Assume that the input file to this script consists of two lines containing this information:

```
line1
line2
```

The hexadecimal equivalent of each character in the character string line1 is as follows:

```
l i n e 1
6C 69 6E 65 31
```

With this information, we can interpret the script's output. This output appears as shown, when run under Linux, Unix, macOS, Windows, and DOS. Linux, Unix, and macOS terminate each line with a line feed character (x'OA'). This character is also referred to as the *newline* character or sometimes as the *linefeed*. Windows and DOS end each line with the pair of characters for carriage return and line feed (x'ODOA'):

```
Linux: 6C 69 6E 65 31 0A 6C 69 6E 65 32 0A

Unix: 6C 69 6E 65 31 0A 6C 69 6E 65 32 0A

Windows: 6C 69 6E 65 31 0D 0A 6C 69 6E 65 32 0D 0A

DOS: 6C 69 6E 65 31 0D 0A 6C 69 6E 65 32 0D 0A 1A

macOS: 6C 69 6E 65 31 0A 6C 69 6E 65 32 0A
```

You'll often see "linefeed" abbreviated as LF, and "carriage return" as CR. So Linux, Unix, and macOS terminate lines with LF, while Windows uses CR LF.

A few operating systems mark the end of the file by a special *end-of-file character*. This byte occurs once at the very end of the file. DOS is an example. It writes its end-of-file character Control-Z or x '1A' at the very end of the file.

This example shows two things. First, what Rexx calls *character I/O* is really "byte-oriented" I/O. Bytes are read one by one, regardless of their meaning to underlying operating system and how it may use *special characters* in its concept of a file system. Rexx character I/O reads every byte in the file, including the end-of-line or other special characters.

Second, character I/O yields platform-dependent results. This is because different operating systems manage their files in different ways. Some embed *special characters* to denote line end, others don't, and the characters they use vary. Character I/O reads these special characters without interpreting their meanings. Line-oriented I/O strips them out. If you want only to read lines of data or I/O records in your script, use line-oriented I/O. If you need to read *all* the bytes in the file, use character I/O.

Character I/O is easy to understand and to use. But it is often platform-dependent. If you're concerned about code portability, be sure to reference the operating system manuals and code to handle all situations. Or, stick to line-oriented I/O, which is inherently more portable.

Conversational I/O

A user interaction with a script is termed a *conversation* or *dialogue*. The interactive process is called *conversational I/O*. When writing a Rexx script that interacts with a user, one normally assumes that the user sees program output on a display screen and enters input through the keyboard. These are the default input and output streams for Rexx.

To output information to the user, code the say instruction. As we've seen, the operand on say can be any expression (such as a list of literals and variables to concatenate). say is equivalent to this call to lineout, except that say does not set the special variable result:

```
call lineout , [expression]
```

The comma indicates that the instruction targets standard output, normally the user's display screen.

Use pull to read a string from the user and automatically translate it to uppercase, or use parse pull to read a string without the uppercase translation. Both instructions read user input into a *template*, or list of variables. Discard any unwanted input beyond the variable list by encoding a period (sometimes referred to as the *placeholder variable*).

This statement reads a single input string and assigns the first three words of that string to the three variables. If the user enters anything more than three words, Rexx discards it because we've encoded the period placeholder variable at the end of the line:

```
parse pull input_1 input_2 input_3 .
```

Redirected I/O

I/O redirection means you can write a program using conversational I/O, but then redirect the input and/or output to other sources. Without changing your program, you could alter its input from the keyboard to an input file. The pull or parse instructions in the program would not have to be changed to make this work. Similarly, you could redirect a script's say instructions to write output to a file instead of the display screen, without changing your program code.

Here is how to redirect I/O. Just run the script using the redirection symbols shown in this table:

Redirection Symbol	Meaning
>	Redirects output to a new file. Creates a new file or overwrites an existing file if one exists with that filename.
>>	Appends (adds on to) an existing file. Creates a new output file if one does not already exist having the filename.
<	Redirects input from the specified file

How's how to invoke the Four-Letter Words program of Chapter 3 with input from a file instead of the keyboard:

```
regina four_letter_words.rexx <four_letter_words.input
```

The file <code>four_letter_words.input</code> consists of one word per line (so it conforms to the program's expectation that it will read one word in response to each prompt it gives). Here's how to give the script input from a file and redirect its output to a file named <code>output.txt</code> as well:

```
regina four_letter_words.rexx <four_letter_words.input >output.txt
```

Redirected I/O is a very powerful concept and a useful testing tool. You can write programs and change their input source or output destination *without changing the script*!

But redirection is operating-system-specific. Operating systems that support redirected I/O include those in the Linux, Unix, BSD, Windows, and DOS families.

A warning about Windows — members in the Windows family of operating systems do not handle I/O redirection consistently. Different versions of Windows handle I/O redirection in slightly different ways. This has long been an issue for programmers who want their programs to run across many Windows versions. This is not a Rexx issue, but rather an inconsistency in the behavior of Windows operating systems. If you rely on redirection under Windows, you will have to test your scripts on each version of the operating system they run on to ferret out any Windows inconsistencies.

I/O Issues

I/O is operating system dependent and thus presents a difficult issue for any programming language. The reason is the inherent tension between an I/O model that is easy to use, easy to understand, and portable — versus the desire to take advantage of operating-system-specific features for file system manipulation.

Rexx always promotes ease of use and portability. Fitting with this philosophy, simplicity trumps OS-specific features and maximizing I/O performance. So, the ANSI standard Rexx I/O model is simple and portable. It does not take advantage of OS-specific I/O features or optimize I/O by platform.

Standard Rexx recognizes the trade-off between I/O portability and OS-specific I/O features by including functions such as stream and the options instruction, which are open ended and permit operands beyond the ANSI standard. This allows Rexx interpreters to add I/O extensions within the context of the ANSI standard that go beyond the standard to leverage OS-specific features.

The second section of the book describes the I/O extensions that different Rexx interpreters provide to leverage OS- specific I/O features. For example, in the mainframe environment, it's not uncommon to see all file I/O handled exclusively with the mainframe-unique EXECIO instruction. Appendix N shows how to code and use EXECIO.

This chapter assumes the user interface to consist of a screen display and keyboard, and that disk I/O means manipulating data residing in files. Of course, many programs require more advanced I/O and different forms of user interfaces. Upcoming chapters cover these topics. Chapters 15 and 16, for example, describe and illustrate both database I/O and screen I/O using various GUI packages. Chapter 17 discusses Web interfaces for Rexx scripts. Section II illustrates the I/O extensions in many Rexx interpreters that provide more sophisticated file processing.

Summary

This chapter provides an overview of the Rexx I/O model and how it is implemented in standard functions for line- and character-oriented I/O. We discussed conversational I/O and how to redirect I/O under operating systems that support it. Redirection is a powerful debugging tool and provides great flexibility, because the source of input and target for output for scripts can be altered *without changing* the scripts themselves. The flexibility that redirection provides is very useful during script testing and debugging.

Two I/O related topics will be covered in upcoming chapters. The *external data queue* or *stack* is an area of memory that can be used to support I/O operations. The second important topic is I/O error handling. Both are covered in future chapters.

Upcoming chapters also cover I/O through interface packages, such as databases, GUI screen handlers, Web server interfaces, and similar tools.

Test Your Understanding

- What are the two basic kinds of standard Rexx input/output? Why would you use one approach versus the other? Which is most portable across various operating systems?
- **2.** What kinds of file control commands can you issue through the stream function? Do these vary by Rexx implementation? What file statuses does the stream function return?
- **3.** Describe the two ways in which you can invoke an I/O function like linein or charout. How do you capture the return code from I/O functions? What happens if you fail to?
- **4.** Do you need to close a file after using it? Under what conditions might this be appropriate? How is it done?
- **5.** If you require very powerful or sophisticated I/O, what options does Rexx offer?

String Manipulation

Overview

String manipulation means parsing, splicing, and pasting together *character strings*, sets of consecutive characters. Rexx excels at string manipulation. This is important for a wider variety of reasons than may be apparent at first. Many programming problems are readily conceived of as operations on strings. For example, building commands to issue to the operating system is a really a string-concatenation exercise. Analyzing the feedback from those commands once they are issued means text analysis and pattern matching. Much of the data formatting and reporting that IT organizations perform requires string processing. Data validation and cleansing require text analysis.

In a broad sense, many programming problems are essentially exercises in "symbol manipulation." *String processing* is a means to achieve generic symbol manipulation.

List processing is another example. Entire programming languages (such as LISP) have been built on the paradigm of processing lists. A list can be considered simply a group of values strung together. Manipulating character strings thus becomes a vehicle for list processing.

The applications that these techniques underlie are endless. Everything from report writing, to printing mailing labels, to editing documents, to creating scripts for systems administration, to scripts that configure the environment, rely on string manipulation.


This chapter introduces Rexx's outermost operators, functions, and pattern-matching capabilities. We show you the features by which Rexx supports string processing so that you will combine them in new ways to address the programming problems you face.

Concatenation and Parsing

Concatenation is the joining together of strings into larger strings. *Bifurcation* refers to splitting a string into two parts. *Parsing* is the inspection of character strings, to analyze them, extract pieces, or break them into components. For example, parsing a U.S. telephone number could separate it

into its constituent parts — a country code, an area code, the prefix and suffix. *Pattern matching* is the scanning of strings for certain patterns. Together, these operations constitute *string manipulation* or *text processing*. Figure 6-1 summarizes the major string operations.

Basic String Operations

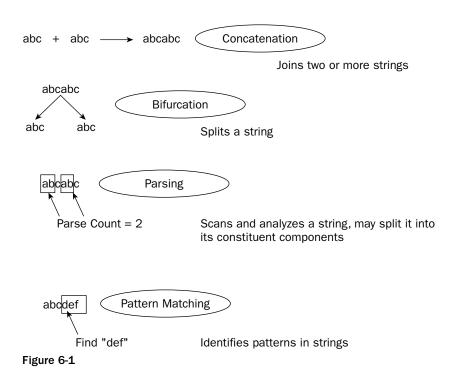

We've already seen that Rexx supports three ways of concatenating strings. These are:

- ☐ *Implicit concatenation* with one blank between the symbols
- ☐ Abuttal, in which immediately adjacent symbols are concatenated without an intervening blank
- ☐ Explicit concatenation via the concatenation operator, | |

The three styles of concatenation can be intermixed within statements. Concatenation may occur wherever expressions can be coded. Here are some sample statements run in sequence:

We've also seen several simple examples of string parsing. The arg instruction retrieves the arguments sent in to a program or internal function and places them into a list of variables. Its general format is:

```
arg [template]
```

The *template* is a list of symbols separated by blanks and/or patterns. The pull instruction operates in the same manner as arg, reading and parsing a string input by the user into a list of variables. The input string is parsed (separated) into the variables in the list, positionally from leftmost to rightmost, as separated by one or more spaces. The spaces delimiting the strings are stripped out, and the variables do not contain any leading or trailing blanks.

There are two special cases to consider when a script reads and parses input by the arg or pull instructions. The first is the situation in which more arguments are passed in to the routine than the routine expects. Look at this case:

```
user input: one 2 three '4' program: pull a b c

a contains: ONE
b contains: 2
c contains: THREE '4'
```

The last (rightmost) variable c in the variable list contains all remaining (unparsed) information. The rule is: If you code too few input variables to hold all those that are input, the final variable in the input list contains the extra information. Remember that you could just ignore this extra information by coding a period:

```
program: pull a b c .
```

Now the variables will contain:

```
a contains: ONE
b contains: 2
c contains: THREE
```

The '4' is simply eliminated from the input by the *placeholder variable*, the period at the end of the pull instruction input list or *template*.

The second situation to consider is if too few arguments are passed in to the receiving routine. Say that the script issues a pull instruction to read input from the user. If too few elements are input by the user, any variables in the list that cannot be assigned values are set to null:

```
user input: one 2
program: pull a b c

a contains: ONE
b contains: 2
c contains: '' /* c is set to the null string */
```

Variable c is set to the null string (represented by back-to-back quotation marks, '''). This is different from saying that the variable is uninitialized, which would mean its value is its own name in uppercase. If the last variable were uninitialized, it would be set to 'C'.

pull is short for the instruction:

```
parse upper pull [template]
```

The *template* is a list of symbols separated by blanks and/or patterns. upper means uppercase translation occurs. Its presence is optional on the parse instruction. To avoid uppercase translation, just leave the upper keyword out of the parse instruction.

Let's look at the parse instruction in more detail. This form of the instruction parses an expression:


```
parse [upper] value [expression] with [template]
```

The *expression* evaluates to some string that is parsed according to the *template*. The template provides for three basic kinds of parsing:

- ☐ By words (character strings delimited by blanks or spaces)
- ☐ By pattern (one character or a string other than blanks by which the expression string will be analyzed and separated)
- ☐ By numeric pattern (numbers that specify column starting positions for each substring within the expression)

Figure 6-2 below illustrates these three parsing methods.

Parsing by Template

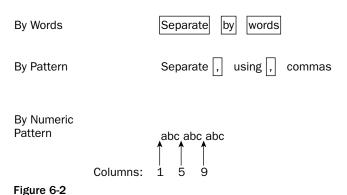

You are already familiar with parsing by words. This is where we use parse to separate a list of elements into individual components based on intervening blanks. Let's parse an international telephone number as an example.

```
phone = '011-311-458-3758'
parse value phone with a b
```

This is a parse by *words* or blank separators. Since there are no blank separators anywhere within the input string, the results of the parse instruction are:

Obviously, the dash (-) here is the separator, not the blank. Let's try parsing by *pattern*, using the dash (-) as the separator or *delimiter*:

```
parse value phone with country_code '-' area_code '-' prefix '-' suffix
```

The results are:

```
country_code = 011
area_code = 311
prefix = 458
suffix = 3758
```

If there were more information in the input variable, regardless of whether or not it contained more dash delimiters, it all would have been placed into the last variable in the list, suffix. If there are too few strings in the input variable list, according to the parsing delimiter, then extra variables in the variable list are assigned null string(s).

The *pattern* can be supplied in a variable. This yields greater programmability and flexibility. In this case, enclose it in parentheses when specifying it in the template:

This parse instruction gives the same results as the previous one with the hardcoded delimiter dashes. The advantage to placing the separator pattern in a variable is that we can now parse a different, international designation for this phone number using the same parse instruction, just by changing the separator inside the pattern variable:

```
phone = '011.311.458.3758'
sep = '.'     /* The period is the Swiss delimiter for phone numbers ... */
parse value phone with country_code (sep) area_code (sep) prefix (sep) suffix
```

The same parse instruction properly separates the constituent pieces of the phone number with this different delimiter. So, supplying the separator pattern in a variable gives scripts flexibility in parsing operations.

Now parse by *numbers*. These represent *column positions* in the input. Run:

```
phone = '011-311-458-3758'
parse value phone with country_code 5 area_code 9 prefix 13 suffix
```

Here are the results from this statement:

```
country_code = 011-
area_code = 311-
prefix = 458-
suffix = 3758
```

Oops! You can see that parsing by numbers goes strictly by column positions. Delimiters don't count. Add these extra columns positions to eliminate the unwanted separators:

```
parse value phone with country_code 4 5 area_code 8 9 prefix 12 13 suffix
```

This gives the intended results because it parses out the unwanted separators by column positions:

```
country_code = 011
area_code = 311
prefix = 458
suffix = 3758
```

These are *absolute* column positions. Each refers to an absolute column position, counting from the beginning of the string.

Placing a plus (+) or minus (–) sign before any number makes its position *relative* to the previously specified number in the list (or 1 for the first number). You can mix absolute and relative positions together in the same template, and even use negative numbers (which move the relative position backwards to the left) but be careful. Unless you have a situation that really requires it, jamming all the parsing into one complex statement is rarely worth it. Just code a series of two or three simpler statements instead. Then others will be able to read and understand your code.

This example properly parses the phone number with both absolute and relative column numbers. The plus signs (+) indicate relative numbers. In this case, each advances the column position one character beyond the previous absolute column indicator:

```
parse value phone with country_code 4 +1 area_code 8 +1 prefix 12 +1 suffix
```

This statement produces the desired result:

```
country_code = 011
area_code = 311
prefix = 458
suffix = 3758
```

With this background, you can see that the parse instruction provides real string-processing power. This example assigns the entire telephone number in the variable phone to three new variables (kind of like a three-part assignment statement):

```
parse value phone with phone_1 1 phone_2 1 phone_3
```

Now the variables phone_1, phone_2, and phone_3 all contain the same value as phone:

```
phone = '011.311.458.3758'
phone_1 = '011.311.458.3758'
phone_2 = '011.311.458.3758'
phone_3 = '011.311.458.3758'
```

In all the examples thus far, the input string was not changed. But it can be if encoded as part of the variable list. Here's an example. Say that we have this variable:

```
employee_name = 'Deanna Troy'
```

This statement simply translates the employee's name into uppercase and places it back into the same variable:

```
parse upper value employee_name with employee_name
```

This statement strips off the employee's first name and places it into the variable first_name. Then it puts the remainder of the name back into the employee_name variable:

```
parse value employee_name with first_name employee_name
```

The value keyword refers to any expression. You may also see the keyword var encoded when referring specifically to a variable. In this case, you should not code the with keyword. This statement using var gives the exact same results as the previous example with value and with:

```
parse var employee_name first_name employee_name
```

A Sample Program

With this introduction to parsing, here's a sample program to illustrate parsing techniques. This script preprocesses the "load file" used to load data into a relational database such as DB2, Oracle, SQL Server, or MySQL. The script performs some simple data verification on the input file prior to loading that data into the database. This "data-cleansing" script ensures the data we load into the database is clean before we run the database load utility. A script like this is useful because the data cleansing that database utilities typically perform is limited.

Here's how the data will look after it's loaded into the relational table:

EMP_NO	FNAME	LNAME	DEPT_NO
10001	George	Bakartt	307
10002	Bill	Wall	204
10003	Beverly	Crusher	305

Databases like DB2, Oracle, and SQL Server accept input data in several different file formats. Two of the most popular are *comma-delimited files* and *record-oriented* or *column-position files*. Here's an example of a *comma-delimited file*:

```
10001, "George", "Bakartt", "307"
10002, "Bill", "Wall", "204"
10003, "Beverly", "Crusher", "305"
1x004, "joe", "Zip", "305"
10005, "Sue", "stans", "3x5"
```

Commas separate the four input fields. In this example, all character strings are enclosed in double quotation marks. Under operating systems that employ a file type, the file type for comma-delimited ASCII files is typically *.del. This input file is named database_input.del.

Here is the other kind of file, a *record file*. Data fields start in specific columns. Fields are padded with blanks, as necessary, so that the next field starts in its required column. Where file types are used this file is typically of extension *.asc, so we've named this file database_input.asc:

```
10001George Bakartt307
10002Bill Wall 204
10003BeverlyCrusher305
1x004joe Zip 305
10005Sue stans 3x5
```

The program reads either of these two input file types. It determines which kind of file it is processing by scanning the input text for commas. If the data contains commas, the program assumes it is dealing with a comma-delimited ASCII file.

Then the program performs some simple data verification. It ensures that the EMP_NO and DEPT_NO data items are numeric, and that the first and last names both begin with capital letters. The script writes any errors it finds to the display. Here's the program:

```
DATABASE INPUT VERIFICATION:
/*
/*
     Determines type of database input file (*.del or *.asc).
     Reads the input data as appropriate to that file type.
     Verifies EMP_NO and DEPT_NO are numeric, names are cap alpha.
                                                           * /
arg input_file .
                         /* read input filename from user
c = ','
                            /* variable C contains one comma
do while lines(input_file) > 0
  /* get EMP_NO, FNAME, LNAME, DEPT_NO from *.DEL or *.ASC file
  parse value input_line with emp_no (c) fname (c) lname (c) dept_no
     fname = strip(fname,B,'"')
    lname = strip(lname, B, '"')
                                 /* remove quote " marks
    dept_no = strip(dept_no,,'"')
    end
```

So that we can easily feed it either kind of file to process, the script accepts the filename as an input parameter. This technique of reading the name of the file to process from the command line is common. It offers more flexibility than "hardcoding" the filename into the script.

To start off, the script reads the first line of input data and determines whether it is processing a comma-delimited input file or a record-oriented file by this code:

The pos built-in function returns the character position of the comma (represented by the variable c) within the target string. If the returned value is greater than 0, a comma is present in the input line, and the program assumes that it is dealing with comma-delimited input. If the script finds no comma in the input line, it assumes that it is dealing with a record-oriented input file.

If the program determines that it is working with a comma-delimited input file, it issues this parse instruction to split the four fields from the input line into their respective variables:

```
parse value input_line with emp_no (c) fname (c) lname (c) dept_no
```

This parse statement strips data elements out of the input string according to comma delimiters. But there is a problem. The second, third, and fourth data elements were enclosed in double quotation marks in the input file. To remove these leading and trailing quotation marks, we use the built-in strip function:

The B operand stands for Both — strip out *both* leading and trailing double quotation marks. Other strip function options are L for *leading* only and T for *trailing* only. Both is the default, so as the third

line in the previous example shows, we don't need to explicitly code it. Instead, we just show that parameter is missing by coding two commas back-to-back. The final parameter in the strip function encloses the character to remove within quotation marks. Here we enclosed the double quotation marks (") within two single quotation marks, so that strip will remove double quotation marks from the variable's contents.

If the script does not find a comma in the input line, it assumes that it is dealing with a file whose data elements are located starting in specific columns. So, the script employs a *parse by number* statement, where the numbers specify column starting positions:

```
parse value input_line with emp_no 6 fname 13 lname 20 dept_no
```

If you program in languages like COBOL or Pascal, you might recognize this as what is often referred to as *record I/O*. Languages like C, C++, and C# call this an I/O *structure*, or *struct*. Chapter 5 showed that Rexx's stream I/O model is simple, yet you can see that it is powerful enough to easily perform record I/O by parsing the input in this manner. Part of the beauty of Rexx is that it is so easy to perform such operations, without needing special syntax or hard-to-code features in the language to accomplish them.

After the parsing by number, the record input may contain trailing blanks for the two names, so these statements remove them:

```
fname = strip(fname)
lname = strip(lname) /* remove trailing blanks */
```

Now that it has decoded the file and normalized the data elements, the program can get to work and verify the data contents. This statement uses the datatype built-in function to verify that the EMP_NO and DEPT_NO fields (the first and last data elements in each input record) are numeric. If datatype does not return the character string NUM, then one of these fields is not numeric and an error message is displayed:

```
if datatype(emp_no) \= 'NUM' | datatype(dept_no) \= 'NUM' then
say 'EMP_NO or DEPT_NO are not numeric:' emp_no dept_no
```

The logical or (|) is used to test both data elements in one if instruction. If either is not numeric, the error message is displayed.

Finally, the script uses the verify built-in function to ensure that the two names both start with a capital letter. First, this nested use of the substr built-in function returns the first letter of the name:

```
substr(fname, 1, 1)
```

Then the verify function tests this letter to ensure that it's a member of the string consisting of all capital letters:

```
if verify(substr(fname,1,1),'ABCDEFGHIJKLMNOPQRSTUVWXYZ') > 0 then
    say "First name doesn't start with a capital letter:" fname
```

The *nesting* of the substr function means that we have coded one function (substr) within another (verify). Rexx resolves the innermost function first. The result of the innermost function is then plunked right into the code at the position formerly occupied by that function. So, the substr function

returns the first letter of the variable fname, which then becomes the first parameter within the parentheses for the verify function.

Pretty nifty, eh? Rexx allows you to nest functions to an arbitrary depth. We do not recommend nesting beyond a single level or else the code can become too complicated. We'll provide an example of deeper nesting (and how it becomes complicated!) later in this chapter.

It's easy to code for *intermediate results* by breaking up the nesting into two (or more) statements. This example shows how to eliminate the nested function to simplify the code. It produces the exact same result as our nested example:

```
first_letter = substr(fname,1,1)
if verify(first_letter,'ABCDEFGHIJKLMNOPQRSTUVWXYZ') > 0 then
```

After the script runs, here is its output for the sample data we viewed earlier:

```
D:\Regina\hf>regina database_input.rexx database_input.asc
Input line: 10001 George Baklarz 307
Input line: 10002 Bill Wong 304
Input line: 10003 Beverly Crusher 305
Input line: 1x004 joe Zip 305
EMP_NO or DEPT_NO are not numeric: 1x004 305
First name doesn't start with a capital letter: joe
Input line: 10005 Sue stans 3x5
EMP_NO or DEPT_NO are not numeric: 10005 3x5
Last name doesn't start with a capital letter: stans
```

The last two lines of the input data contained several errors. Parsing techniques and string functions together enabled the program to identify these errors.

String Functions

The parse instruction provides syntactically simple, but operationally sophisticated parsing. You can resolve many string-processing problems with it. Rexx also includes over 30 string-manipulation functions, a few of which the sample script above illustrates.

This section describes more of the string functions. A later section in this chapter discusses the eight outermost functions that are *word-oriented*. The *word-oriented functions* process strings on the basis of words, where a *word* is defined as a character string delimited by blanks or spaces. For example, this string consists of a list of 16 words:

```
now is the time for all good men to come to the aid of their country
```

Before we proceed, here is a quick summary of Rexx's string functions (see Appendix C for full coding details of these and all other Rexx functions):

- □ abbrev Tells if one string is equal to the first characters of another
- □ center Centers a string within blanks or other *pad* characters

changestr — Changes all occurrences of one string within another to a specified string compare — Tells if two strings are equal (like using the = operator) copies — Returns a string concatenated to itself n times countstr — Counts how many times one string appears within another datatype — Verifies string contents based on a variety of "data type" tests delstr — Deletes a substring from within a string insert — Inserts one string into another lastpos — Returns the last occurrence of one string within another left — Returns the first n characters of a string, or it can left-justify a string length — Returns the length of a string overlay — Overlays one string onto another starting at a specified position in the target pos — Returns the position of one string within another reverse — Reverses the characters of a string right — Returns the last n characters of a string, or it can right-justify a string strip—Strips leading and/or trailing blanks (or other characters) from a string substr — Returns a substring from within a string translate — Transforms characters of a string to another set of characters, as directed by two "translation strings" verify—verifies that all characters in a string are part of some defined set xrange — Returns a string of all valid character encodings

The changestr and countstr functions were added by the ANSI-1996 standard. Rexx implementations that meet the TRL-2 standard of 1990 but not the ANSI-1996 standard may not have these two functions. This is one of the few differences between the TRL-2 and ANSI-1996 standards (which are fully enumerated in Chapter 13). Regina Rexx fully meets the ANSI-1996 standard and includes these two functions.

Here's a simple program that demonstrates the use of the abbrev, datatype, length, pos, translate, and verify string functions. The script reads in four command-line arguments and applies data verification tests to them. The script displays any inaccurate parameters.

```
say 'First parm must be a valid abbreviation for TESTSTRING:' first
/* Second parm must consist only of digits and be under 5 bytes long */
if datatype(second) \= 'NUM' then
   say 'Second parm must be numeric:' second
if length(second) > 4 then
   say 'Second parm must be under 5 bytes in length:' second
/* Third parm must occur as a substring somewhere in the first parm */
if pos(third, first) = 0 then
   say 'Third parm must occur within the first:' third first
/* Fourth parm translated to uppercase must contain only letters ABC */
if fourth = '' then
   say 'You must enter a fourth parameter, none was entered'
uppercase = translate(fourth)
                                /* translate 4th parm to uppercase */
if verify(uppercase,'ABC') > 0 then
   say 'Fourth parm in uppercase contains letters other than ABC:' fourth
```

Here's an example of running this program with parameters it considers correct:

```
c:\Regina\pgms> regina verify_arguments TEST 1234 TEST abc
```

Here's an example where incorrect parameters were input:

```
c:\Regina\pgms>regina verify_arguments TEXT 12345 TEST abcdef
First parm must be a valid abbreviation for TESTSTRING: TEXT
Second parm must be under 5 bytes in length: 12345
Third parm must occur within the first: TEST TEXT
Fourth parm in uppercase contains letters other than ABC: abcdef
```

Let's discuss the string functions this code illustrates.

The first parameter must be a valid abbreviation for a longer term. Where would you use this function? An example would be a program that processes the commands that a user enters on a command line. The system must determine that the abbreviation entered is both valid and that it uniquely specifies which command is intended. The abbrev function allows you to specify how many characters the user must enter that match the beginning of the target string. Here, the user must enter at least the four letters TEST for a valid match:

```
if abbrev('TESTSTRING',first,4) = 0 then
   say 'First parm must be a valid abbreviation for TESTSTRING:' first
```

The second parameter the user enters must be numeric (it must be a valid Rexx number). The datatype function returns the string NUM if this is the case, otherwise it returns the string CHAR:

```
if datatype(second) \= 'NUM' then
  say 'Second parm must be numeric:' second
```

datatype can also be used to check for many other conditions, for example, if a string is alphanumeric, binary, lowercase, mixed case, uppercase, a whole number, a hexadecimal number, or a valid symbol.

Using the length function allows the program to determine if the second parameter contains more than four characters:

```
if length(second) > 4 then
   say 'Second parm must be under 5 bytes in length:' second
```

The third parameter must be a substring of the first parameter. The pos function returns the starting position of a substring within a string. If the substring does not occur within the target string, it returns 0:

```
if pos(third,first) = 0 then
   say 'Third parm must occur within the first:' third first
```

This code ensures that the user entered a fourth parameter. If a fourth parameter was not entered, the argument will have been set to the null string (represented by the two immediately adjacent single quotation marks):

```
if fourth = '' then
    say 'You must enter a fourth parameter, none was entered'
```

Finally, when translated to uppercase, the fourth parameter must not contain any letters other than A, B, or C. Using the translate function with a single parameter translates the fourth argument to uppercase:

```
uppercase = translate(fourth) /* translate 4th parm to uppercase */
```

Use the verify function to ensure that all characters in a string are members of some set of characters. This verify statement ensures that all the characters in the string named uppercase are members of its second parameter, hardcoded here as the literal string ABC. If this is not the case, the verify function returns the position of the first character violating the rule:

```
if verify(uppercase,'ABC') > 0 then
   say 'Fourth parm in uppercase contains letters other than ABC:' fourth
```

The Rexx string functions are pretty straightforward. This script shows how easy it is to use them to perform data verification and for basic string processing.

The Word-Oriented Functions

A *word* is a group of printable characters surrounded by blanks or spaces. A word is a blank-delimited string. Rexx offers a group of *word-oriented functions*:

- □ delword—Deletes the *n*th word(s) from a string
- □ space Formats words in a string such that they are separated by one or more occurrences of a specified pad character

subword—Returns a <i>phrase</i> (substring) of a string that starts with the <i>n</i> th word
word—Returns the nth word in a string
wordindex — Returns the character position of the n th word in a string
wordlength — Returns the length of the n th word in a string
wordpos — Returns the word position of the first word of a phrase (substring) within a string
words — Returns the number of words in a string

These functions can be coupled with the outermost functions to address any number of programming problems in which symbols are considered as strings of words. One such area is *textual analysis* or *natural language processing*. An example of a classic text analysis problem is to confirm the identity of the great English playwright Shakespeare. Were all his works written by one person? Could they have been written by one his better-known contemporaries?

One way to answer these questions is to analyze Shakespeare's works and look for word-usage patterns. Humans tend to use words in consistent ways. (Some experts claim they can analyze word usage to the degree that individuals' *linguistic profiles* are unique as their fingerprints). Analyzing Shakespeare's texts and comparing them to those of contemporaries indicates whether Shakespeare's works were actually written by him or someone else.

Special-purpose languages such as SNOBOL are particularly adept at natural language processing. But SNOBOL is premodern; it lacks good control constructs and robust I/O. Better to use a more main-stream, portable, general-purpose language like Rexx that offers strong string manipulation in the context of good structure.

Text analysis is a complex topic outside the scope of this book. But we can present a simple program that suggests how Rexx can be applied to textual analysis. The script named Poetry Scanner reads modern poetry and counts the number of articles and prepositions in the input. It produces a primitive form of "sophistication rating" or *lexical density*. In our example, this rating comprises two ratios: the ratio of the number of longer words to the number of shorter words, and the ratio of prepositional words to the total number of words in the text.

To perform these operations, the script translates the input text to all uppercase and removes punctuation, because punctuation represents extraneous characters that are irrelevant to the analysis.

For this input poem:

```
"The night was the darkest,
for the byrds of love were flying. And lo!
I saw them with the eyes of the eagle.
above
the cows flew in the cloud pasture.
below
the earthworms were multiplying ...
god grant that they all find their ways home."
```

... the program produces this output:

```
THE NIGHT WAS THE DARKEST

FOR THE BYRDS OF LOVE WERE FLYING AND LO
I SAW THEM WITH THE EYES OF THE EAGLE

ABOVE
THE COWS FLEW IN THE CLOUD PASTURE
BELOW
THE EARTHWORMS WERE MULTIPLYING
GOD GRANT THAT THEY ALL FIND THEIR WAYS HOME

Ratio long/short words: 0.40625
Number of articles: 8
Number of prepositions: 5
Ratio of preps/total words: 0.111111111

Press ENTER key to exit...
```

Here is the program:

```
/* POETRY SCANNER:
                                                                  * /
/*
/*
      This program scans text to perform primitive text analysis.
list_of_articles = 'A AN THE'
list_of_preps = 'AT BY FOR FROM IN OF TO WITH'
do while lines('poetry.txt') > 0
  line_str = linein('poetry.txt') /* read a line of poetry
  line_str = translate(line_str) /* translate to uppercase
                                                                 * /
                                     ','.,!:;"') /* remove punc. */
  line_str = translate(line_str,'
  call lineout ,space(line_str)
                                  /* display converted input line */
                                  /* do while a word to process
  do j=1 to words(line_str)
                                                                  * /
     if wordlength(line_str,j) >= 5 then
                                             /* count big words
         big_words = big_words + 1
     else
         small_words = small_words + 1
                                             /* count small words */
     word_to_analyze = word(line_str,j)
                                             /* get the word
     if wordpos(word_to_analyze,list_of_articles) > 0 then
         number_articles = number_articles + 1 /* count the articles*/
     if wordpos(word_to_analyze,list_of_preps) > 0 then
                                           /* count prep phrases*/
         number_preps = number_preps + 1
  end
end
say 'Ratio long/short words: ' (big_words/small_words)
say 'Number of articles: ' number_articles
say 'Number of prepositions:' number_preps
say 'Ratio of preps/total words:' (number_preps/(big_words+small_words))
```

The program demonstrates several of the word-oriented functions, including words, word, wordlength, and wordpos. It also uses the translate function in two different contexts.

After it reads a line of input, the program shows how the translate function can be used with only the input string as a parameter to translate the contents of the string to all uppercase letters:

Then translate is used again, this time to replace various punctuation characters with blanks. In this call, the third parameter to translate contains the characters to translate, and the second parameter tells what characters to translate them to. This example translates a various punctuation characters into blanks:

```
line_str = translate(line_str,' ','.,!:;"') /* remove punc. */
```

The do loop processes the individual words in each input line. It executes while there is a word to process in the current input line:

```
do j=1 to words(line_str) /* do while a word to process */
```

The words function returns the number of blank-delimited words in the input line, line_str.

The wordlength function tells the length of the word. The script uses it to determine whether the word is longer than 4 bytes:

The script needs to get an individual word in order to determine if that word is an article or preposition. To parse out one word from the input string, the script invokes the word function:

To identify articles in the text, the program initializes a string containing the articles:

```
list_of_articles = 'A AN THE'
```

Then it uses the wordpos function to see if the word being inspected occurs in this list of articles. wordpos returns the starting position of the word in a string if it occurs in the string. If it returns 0, we know that the word is not an article:

What this line of code really does is *list processing*. It determines if a given element occurs in a list. String processing is easily used to emulate other kinds of processing techniques and various data structures, such as the *list*. As mentioned in the chapter introduction, string manipulation is powerful because it is a generic tool that can easily be used to implement other processing paradigms.

The program ends with several say instructions that show how output can be dynamically concatenated from the results of expressions. The last line of the program calculates a ratio and displays it with an appropriate label:

```
say 'Ratio of preps/total words:' (number_preps/(big_words+small_words))
```

Rexx evaluates the expression in parentheses prior to executing the say instruction and displaying the output line. Remember that in evaluating expressions, Rexx always works from the innermost set of parentheses on out. The script uses the parentheses to ensure that this expression is resolved first:

```
(big_words+small_words)
```

The result of this expression feeds into the division:

```
(number_preps/(big_words+small_words))
```

To summarize, this simple program illustrates a number of the word and string functions. More importantly, it demonstrates that these features can be combined to create powerful string-processing scripts. Rexx offers excellent string-processing facilities.

The Bit String Functions and Conversions

The TRL-2 standard added support for *bit strings*, strings that represent binary values. Bit strings are composed solely of 0s and 1s. They are represented as a string of 0s and 1s immediately followed by the letter b or B:

```
'11110000'b /* represents one character (or "byte") as a bit string */
```

This encoding parallels that used to represent *hexadecimal* (or *hex*) strings. Hex is the base-16 arithmetic system by which computer bits are represented. Each character or byte is represented by two hex digits. Hex strings are composed of the digits 0 thru 9 and letters A thru F, immediately followed by the letter x or X:

```
'ODOA'x /* the two byte end-of-line indicator in Windows and DOS */
```

Binary strings find several uses. For example, use them to specify characters explicitly, bit by bit. This helps you store and manipulate unprintable characters, for example. The relationship of bit strings to characters is described by the table called a *character map*. Sometimes this is referred to as the *character encoding scheme*.

Want to see your system's entire character map? Just enter the xrange function:

```
say xrange() /* displays the character map */
```

Or display some portion of the character map by specifying a range of starting and ending points. The range can be expressed in binary, hex, or character. You'll see the entire map, just as shown earlier, if you enter the entire range of the map explicitly:

```
say xrange('00'x,'FF'x) /* displays the character map */
```

This statement also displays the entire character range:

```
say xrange('00000000'b,'111111111'b) /* displays the character map */
```

Display the same character map in hex (base-16) by using the c2x (character-to-hex) conversion function:

Want to see it as a bit string? You'll have to do two conversions: character to hex, then hex to binary. Nest the character-to-hex (c2x) function within the hex-to-binary (x2b) function to do this. Remember, Rexx always evaluates the expression nested in the innermost parentheses first and works its way outward from there. In this example, Rexx first performs the xrange function; then it executes c2x, and finally it runs x2b, giving us the binary map in the end:

```
say x2b(c2x(xrange())) /* displays the character map in binary */
```

Bit strings have many applications. For example, database management systems manipulate *bit map indexes* to provide quick access to data having a low variety of possible values (*low cardinality*) by ANDing bit strings representing the data values. Another use for bit strings is in the technique called *key folding*. This develops a key for direct (random) data access based on character string key fields. A logical or bit operation is applied to the character field(s) to develop a key that is evenly distributed across direct access slots or positions in the database or on disk. A similar technique called *character folding* is used to map similar characters to a common target, for example, to eliminate certain distinctions between strings. This would be useful when you want similar strings to be compared as equal.

Rexx provides three binary string functions that perform logical operations on binary strings:

- □ bitand—Returns the string result of two strings logically AND'd together, bit by bit
- □ bitor Returns the string result of two strings logically OR'd together, bit by bit
- □ bitxor Returns the string result of two strings logically EXCLUSIVE OR'd, bit by bit

Here are examples that apply these binary operations on bit strings. The binary string functions return their results in the form of a character string (comprising one character, since 8 bits make a character and the input strings we supply are one character long). Therefore, we use the character-to-hex (c2x) and hex-to-binary (x2b) functions to interpret the result back to a displayable bit string:

The bitand operation sets bits to TRUE (1) in the result, only if they are TRUE in *both* strings. bitor sets bits to TRUE (1) if they are TRUE in *either* string. The bitxor function sets bits to TRUE only if they are TRUE in *exactly one* input string or the other.

The next chapter covers data conversions in further detail and includes an sample program that demonstrates folding a two-part character key. It illustrates the bitand function and the c2x (character-to-hexadecimal) and x2b (hexadecimal-to-binary) conversion functions.

Summary

This chapter introduces string processing. It describes the basic techniques for concatenation and parsing in Rexx and lists the many built-in functions for string and word processing. The sample programs demonstrate some of these techniques and functions.

The techniques we explored included concatenation, or the joining together of strings, and parsing, the analysis and splitting of strings into their constituent substrings. We looked at a sample script that performed input data validation and saw how string analysis and parsing applied to this problem. Then we looked at string functions, including those that analyze *words*, or discrete groups of letters surrounded by spaces or blanks. Finally, we discussed bit strings. These can be used in a wide variety of applications, such as database bit indexes and key folding. We discussed the major bit manipulation functions and how bit strings are converted to and from other forms by using conversion functions.

Chapter 8 illustrates more string manipulation. It includes a script that can tell whether parentheses are balanced (for example, as they might be coded within a Rexx statement). There is also a function called Reverse, which reverses the characters in an input string, just like the Rexx built-in reverse function. This new Reverse script does its work in an interesting way — it calls itself as its own subroutine. Stay tuned!

Test Your Understanding

- **1.** What is *string processing*, and why are outermost features important in a scripting language?
- **2.** What are the three methods of string concatenation? How is each different?
- **3.** What are the three methods of parsing with the parse instruction, and how does each operate?
- **4.** Which built-in function would you use for each of the following tasks:
 - ☐ Checking that all characters in one string occur as members in another
 - ☐ Verifying the data type of a user-input data item
 - ☐ Finding the position of a substring with a string
 - ☐ Removing all occurrences of a specified character from a string
 - ☐ Right- and left- justifying a string for printing in a report
 - ☐ Removing leading and/or trailing pad characters from a string
- **5.** What is the difference between the wordindex and wordpos functions?
- **6.** How are printable characters, hex characters, and bit strings related? What are some of the conversion functions used to convert values between them?
- **7.** What are some of the uses of bit strings in applications?

Numbers, Calculations, and Conversions

Overview

The second chapter gives the barest definition of what numbers are and how they are used. Rexx is designed to handle arithmetic in as natural as manner as possible. It conforms to the basic rules of computation that people absorb in high school or college. For most programs, you'll need no special knowledge of how Rexx handles numbers. Rely on its automatic numeric conversions and rounding, and your scripts will work just fine.

Rexx differs from languages that place the burden of cross-system consistency on the developer. Its language definition ensures that calculations provide the same outputs, regardless of language implementation or the platform on which it is run.

Rexx achieves this cross-platform consistency by employing decimal arithmetic internally. This contrasts with the floating-point or binary arithmetic used by most other programming languages, which produce calculation results that can vary by platform. Rexx's natural or human-oriented approach to computation is part of its appeal as an easy-to-use, portable scripting language.

Even with this high level of automation, there will be situations where you require some knowledge of how Rexx handles calculations and how you can affect them. This chapter probes a little more deeply so that you'll be able to handle these situations appropriately. More specifically, we'll look at the ways in which you can express numeric values within scripts. We'll discuss the numeric functions for manipulating numbers, as well as the conversion functions that transpose numbers to other forms. We'll also look at how to manage precision in calculations, and ways to print or display numbers in the appropriately. The last part of the chapter focuses on the conversion functions that convert between numbers, character strings, bit strings, and hexadecimal values. A sample script demonstrates several conversion functions in illustrating a programming technique called key folding.

The Basics

All Rexx variables are character strings. Numbers are just character strings whose contents are considered numeric. Numbers are strings of one or more digits, optionally preceded by plus or minus sign (+ or -), and optionally containing a single period to represent a decimal point. Extending Rexx's flexible treatment of numbers, numbers may optionally have preceding or trailing blanks (which Rexx ignores when calculating).

Numbers may also be expressed in two forms of exponential notation: *scientific* and *engineering*. Scientific notation has one digit to the left of the decimal place, followed by fractional and exponential components. Engineering notation expresses the integer component by a number between 1 and 999. The \mathbb{E} that precedes the exponential portion of the number in either notation can be either uppercase or lowercase. Spaces may not be embedded within the exponential portion of a number.

Here are some valid Rexx numbers:

Here are a few *invalid* numbers:

```
'3 3' /* Internal spaces are not allowed. */
3.3.3 /* More than one period is not allowed. */
'333b' /* This contains the letter b. Alphanumeric strings are not numeric. */
333(33 /* contains an invalid internal character, the left parenthesis */
```

A string containing one of these forms of valid numbers will be recognized by Rexx as a number when appropriate. For example, when two values are compared, Rexx implements a *numeric comparison* if both values are numeric. Otherwise, it employs a *character comparison*. The way Rexx performs the numeric comparison internally is to subtract one number from the other. A result of 0 means that the two numbers are the same; any other value indicates their difference.

The basic rules of calculation in Rexx are:

- Results are determined up to the number of significant digits (which defaults to 9).
- ☐ Trailing zeroes are retained (except when using the power and division operators).
- \Box A result of 0 is represented as a single-digit 0.
- Results are expressed in scientific exponential notation if either the number of digits prior to the decimal point exceeds the setting for significant digits or the number of digits following the decimal point exceeds twice the number of significant digits.

The term *significant digits* refers to how many digits are retained during a calculation. This is often termed the *precision* to which results are carried. Beyond this number of significant digits, or precision, Rexx rounds off the number.

The default number of significant digits is 9. Remember the Poetry Scanner program in the previous chapter? This is why it printed this output:

```
Ratio of preps/total words: 0.111111111
```

in response to this calculation:

```
say 'Ratio of preps/total words:' (number_of_preps/(big_words/small_words))
```

The nine digits to the right of the decimal point are the default number of significant digits (the default precision). Use this simple command to alter the number of significant digits:

```
numeric digits [expression]
```

For example, set the precision to four digits:

```
numeric digits 4
```

If you placed this statement prior to the calculations in the Poetry Scanner script, that same say instruction would display:

```
Ratio of preps/total words: 0.1111
```

This shows the power of the numeric digits instruction. With it you can alter or carry out accuracy to any desired point.

numeric digits also determines whether your output appears in exponential notation. If you expect a nonexponential result but Rexx gives you an exponential one, increasing the precision is one way to change this.

The numeric instruction also has the fuzz keyword to indicate how many significant digits less than that set by numeric digits will be involved during numeric comparisons. numeric fuzz only applies to comparisons. It has the effect of temporarily altering the number of significant digits for comparisons only. Its value must be less than the setting of numeric digits. Its default is 0.

fuzz essentially controls the amount by which two numbers may differ before being considered equal. For example, if numeric digits = 5 and numeric fuzz = 1, then numeric comparisons are carried out to four significant digits.

Here's a series of statements to demonstrate the effects of numeric digits and numeric fuzz. You can see how their settings determine the precision of comparisons:

numeric form allows you to dictate which form of exponential notation is used. The default is scientific. To change this to engineering notation, enter:

```
numeric form engineering
```

Use the built-in functions digits, fuzz, and form to retrieve or display the current settings of numeric digits, numeric fuzz, and numeric form, respectively. For example, assuming that you haven't changed the defaults, here's what these functions return:

The only two errors Rexx gives from calculations are *overflow/underflow* and *insufficient storage*. The first occurs when the exponential part of a number becomes too large or too small for the language interpreter, while the second means Rexx ran out of memory.

Chapter 10 discusses and illustrates how to set up error or exception routines to handle or "trap" certain kinds of error situations. One error you can manage by exception routines is the unintended loss of significant digits. This is achieved through the LOSTDIGITS condition, a feature added to Rexx by the ANSI-1996 standard. Chapter 10 gives full details on the LOSTDIGITS condition and how to use it.

To control the display style of numbers, use the format built-in function:

```
format(number_string, before, after)
```

format rounds and formats a number. before indicates how many characters appear in the integer part and after indicates how many characters appear in the decimal part.

If before is too small to contain the number, an error results. If after is too small, the number is rounded to fit.

If before is larger than the integer requires, blanks precede the number. If after is larger than the decimal part requires, extra zeroes are added on the right.

With this information, another option in the Poetry Scanner script would have been to leave numeric digits alone (letting it default it to 9 for all calculations), then format the output to reduce the number of digits to the right of the decimal point:

```
outratio = number_preps/(big_words+small_words)
say 'Ratio of preps/total words:' format(outratio,1,4)
```

This yields the same result we got earlier from changing the value of numeric digits to 4:

```
Ratio of preps/total words: 0.1111
```

Here are a few more examples of the format function:

format can also be used to control the display of exponential numbers. This is the template for this version of format:

```
format(number [,[before] [,[after] [,[expp] [,expt]]]])
```

expp and expt control the formatting of the exponential part of the result. expp is the number of digits used for the exponential part, while expt sets the trigger for the use of exponential notation. Here are a few examples:

```
format('12345.67',,,2,3) == '1.234567E+04'

format('12345.67',,,4,4) == '1.234567E+0004'

format('12345.67',,2,,0) == '1.23E+4'

format('12345.67',,3,,0) == '1.235E+4'
```

The format function is useful for generating reports with numbers nicely aligned in columns. Use it to right-justify numbers and ensure that a consistent number of decimal places appear. Also use it to round off numbers to any point of precision.

More Numeric Functions

To this point, we've discussed functions that determine precision in calculations and comparisons, and we've demonstrated how to format numbers for printing and display. Beyond digits, form, format, and fuzz, Rexx offers several other built-in functions designed to manipulate numbers. Here are these additional numeric functions:

- □ abs Returns the absolute value of a number
- □ max Returns the largest number from a list of numbers
- □ min—Returns the smallest number from a list of numbers
- ☐ random Returns a random number within the range given (inclusive)
- □ sign Returns 1 if number is greater than 0, or 0 if the number is 0, or -1 if the number is less than 0
- □ trunc Truncates a number

Appendix C contains complete coding information for all these functions. Here, we will cover some of their common uses.

Here are a few examples of the functions:

```
/* displays: 4.1
    abs(-4.1)
    abs(4.1)
                     /* displays: 4.1
say
say
    abs(-0.11)
                     /* displays: 0.11
    abs(-0)
                     /* displays: 0
say
                     /* displays: 88
say
    \max(3,2,88)
                     /* displays: 0
say max(0,-1,-17)
say max(-7.0000, -8) /* displays: -7.0000
say min(-1,14,-7.0000) /* displays: -7.0000
say min(50,13)
                      /* displays: 13
say
    sign(-12)
                         displays: -1
sav
    sign(1)
                     /*
                         displays: 1
                     /*
say
    sign(0)
                        displays: 0
    trunc(11.11) /* displays: 11
                                      -Returns whole number after truncation */
sav
    trunc(11.11,2) /* displays: 11.11
say
                      -Returns number truncated to 2 decimal places */
    trunc(11.11,1) /* displays: 11.1
                       -Returns number truncated to 1 decimal place */
```

The random function takes this form:

```
random(min, max, seed)
```

It generates a random number between min and max (inclusive), based on the seed value. If you don't provide a seed, Rexx generates its own random number (usually based on the system time-of-day clock). If min and/or max are not specified, they default to 0 and 999, respectively. Here are a couple examples:

Many Rexx implementations offer extensions for transcendental mathematical functions. These include tangent, sine, cosine, and the like. Section II covers these implementation-specific extensions to standard Rexx when it discusses the features of the various open-source Rexx interpreters. Also, Appendix H lists a few dozen of the many free and open-source Rexx tools and interfaces that are available. Among them are several external function libraries that support advanced mathematics.

Conversions

Rexx variables contain values representing character, decimal, hexadecimal, and binary strings. Obviously, there will be occasions when you need to convert variables from one of these representations to another. Rexx provides a set of *conversion functions* that allow you to convert data between the different formats. Here is a list of these conversion functions:

Function	Converts
b2x	Binary to hexadecimal
c2d	Character to decimal
c2x	Character to hexadecimal
d2c	Decimal to character
d2x	Decimal to hexadecimal
x2b	Hexadecimal to binary
x2c	Hexadecimal to character
x2d	Hexadecimal to decimal

The datatype function is useful in testing variables to see what kind of data they contain. datatype without an option returns either the character string NUM or CHAR to indicate whether the operand is numeric or character:

Or, you can specify an option or "type" of test to perform:

```
say datatype('12','W') /* displays: 1 -the string contains a Whole number */
```

As always, options to functions can be specified in either uppercase or lowercase. Here is the complete set of options or tests for the datatype function:

datatype Option	Use
A	Alphanumeric — returns 1 if the string contains only characters in the ranges 'a'–'z', 'A'–'Z', and '0'–'9'.
В	Binary — returns 1 if the string contains only 0s and 1s.
L	Lowercase — returns 1 if string contains characters only in the range 'a'-'z'.
M	Mixed case — returns 1 if string contains characters only in the ranges 'a'-'z' and 'A'-'Z'.

Table continued on following page

datatype Option	Use
N	Number — returns 1 if string is a valid Rexx number.
S	Symbol — returns 1 if string comprises a valid Rexx symbol.
U	Uppercase — returns 1 if string contains only characters in range 'A'-'Z'.
W	Whole number — returns 1 if string represents a whole number under the current setting for numeric digits. In many programming languages, a whole number is referred to as an integer.
X	Hexadecimal — returns 1 if string represents a valid hex number (consists only of letters 'a'-'f', 'A'-'F', and digits '0'-'9').

The string that datatype inspects can be of any representation: character, hex, or binary. The sample program Verify Arguments in Chapter 6 showed how to use datatype in testing the values of user-input parameters.

A Sample Program

Here's a sample program that uses the data conversion functions and the bitand bit string function. This script takes two character fields and folds (logically ANDs) the bit representation of these character fields together to create a direct access key. As mentioned in Chapter 6, this technique is called *key folding* and can be used in developing a file manager or database system. It permits direct access to records based on randomizing character keys. Here's the program:

```
/*
    FOLDED KEY:
/*
                                                                           */
/*
       This program folds a character key from two input fields.
                = 'key_field_1'
                                                 /* the original string */
char_key1
char_key1 = 'key_field_1'
char_key_hex1 = c2x(char_key1)
                                                 /* the string in hex */
char_key_bin1 = x2b(char_key_hex1)
                                                /* the string in binary*/
char_key2 = 'key_field_2'
                                                /* the original string */
char_key_hex2 = c2x(char_key2) /* the string in hex */
char_key_bin2 = x2b(char_key_hex2) /* the string in binary*/
folded_key = bitand(char_key_bin1, char_key_bin2)
                                                            /* fold keys */
say 'First key : char_key1
                                                 /* display all results */
                 :' char_key_hex1
say 'In hex :' char_key_hex1
say 'In binary :' char_key_bin1
say 'Second key : char_key2
say 'In hex :' char_key_hex2
say 'In binary : char_key_bin2
say 'Folded key : ' folded_key
```

The program output looks like this:

The program shows how to use built-in functions for conversions between data types. This statement converts the original character string key to its hexadecimal equivalent through the c2x function:

```
char_key_hex1 = c2x(char_key1) /* the string in hex */
```

Then, the x2b function converts that hex string to a binary string:

```
char_key_bin1 = x2b(char_key_hex1) /* the string in binary*/
```

After both original character strings have been converted to binary, this statement logically ANDs the two bit strings together to produce the folded key:

```
folded_key = bitand(char_key_bin1, char_key_bin2) /* fold keys */
```

The original input fields the script folded contained the character strings key_field_1 and key_field_2.

The last line in the output shows that ANDing these values together on the bit level only changes the few bits at the end of the folded key string. These two key values require more differentiation than just a single different final character! (We've used similar input values here to make the operation of the script more clear.) In a real environment, we would expect the key fields to hold more diverse data to make this algorithm useful. Nevertheless, the program shows how simple it is to perform useful operations with the bit manipulation and conversion functions. We've implemented a simple algorithm to create keys out of arbitrary character strings with just a few lines of code.

Summary

Rexx guarantees that the results of arithmetic operations will be the same regardless of the platform or the Rexx interpreter. This is an important advantage over many other programming languages, which place this burden on the developer. It makes Rexx code more reliable and portable with little effort on the programmer's part.

The only differences in calculations come in where implementations support different maximums (for example, different maximum precision) or when they have differing amounts of total memory with which to work.

One downside to Rexx's approach to numeric computations is its relatively slow speed. All variables contain strings values that must be converted internally prior to computation. The result is that computations are slower than they are in languages that carry numeric values in internal formats optimized to perform calculations. Given modern computer hardware, this downside only matters when programs are computationally bound. For the typical program, this "downside" matters not at all.

Rexx transparently handles issues with numeric conversions as necessary to perform numeric operations. Nevertheless, there are times when knowing a little more about how Rexx handles numbers is useful; this chapter provides that detail. We discussed ways to represent numbers in Rexx variables, how to control the precision to which calculations are carried out, techniques to format numbers for display, the use of exponential notation, and the built-in functions that manipulate numbers.

The datatype function is the basic means by which the kinds of data held within variables may be ascertained. Rexx provides a full set of functions for converting strings between data types. These are usually referred to as the *conversion functions*. Appendix C provides a full coding reference for all Rexx functions, including the conversion functions.

Test Your Understanding

- Describe the relationship between numeric digits and numeric fuzz. How do their settings affect precision and numeric comparisons? Why would you set fuzz rather than just altering digits?
- **2.** What's the difference between scientific and engineering exponential notations? To which does Rexx default? How do you display and/or change the default?
- **3.** What functions are used to right-justify numeric output in reports?
- **4.** What kinds of data conditions does the datatype function help identify?
- **5.** Which of the following are valid numbers?

```
-22
' -22 '
2.2.
2.2.2
222b2
2.34e+13
123.E -2
123.2 E + 7
```



Subroutines, Functions, and Modularity

Overview

Rexx fully supports structured programming. It encourages *modularity* — breaking up large, complex programs into a set of small, simple, interacting components or pieces. These components feature well-defined interfaces that render their interaction clear. Modularity underlies good program structure. Modularity means more easily understood and maintained programs than ill-designed "spaghetti" code, which can quickly become unmaintainable on large programming projects. Structured programming practices and modularity together reduce error rates and produce more reliable code.

Rexx provides the full range of techniques to invoke other programs and to create subroutines and functions. The basic concept is that there should be ways to link together any code you create, buy, or reuse. This is one of the fundamental advantages to using a "glue" language like Rexx.

With Rexx, you can develop large, modular programs that invoke routines written in Rexx or other languages, which issue operating system commands and utilize functions packaged in external function libraries. This chapter describes the basic ways in which one writes modular Rexx programs.

This chapter investigates how to write internal subroutines and functions, and how to call them from within the main program. Passing arguments or values into subroutines is an important issue, as is the ability to pass changed values back to the calling program. Variable *scoping* refers to the span of code from within which variables can be changed. This chapter explores the rules of scoping and how they affect the manner in which scripts are coded. Finally, we introduce the idea of *recursion*, a routine that calls itself as its own subroutine. While this may at first seem confusing, in fact it is a simple technique that clearly expresses certain kinds of algorithms. Not all programming languages support recursion; Rexx does. The chapter includes a brief script that illustrates how recursion operates.

The Building Blocks

As Figure 8-1 shows, any Rexx script can invoke either *internal* or *external* routines. *Internal* means that the code resides in the same file as the script that *calls* or invokes the routines. Those routines that are *external* reside in some file other than that of the invoking script.

How Rexx Supports Modularity

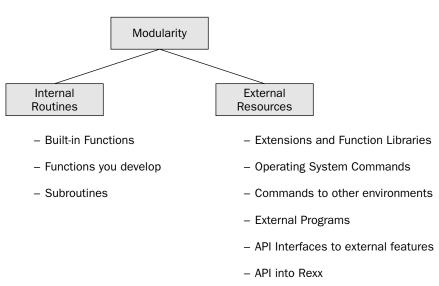


Figure 8-1

Internal routines are classified as either *functions* or *subroutines*. Functions include those that are provided as part of the Rexx language (the *built-in functions*) and those that you write yourself (*user-defined functions*). Functions are distinct from subroutines in that functions *must* return a single result string to the caller through the return instruction with which they end. Rexx replaces the function code in any statement with the returned value from the function. Subroutines may or may not send back a value to their caller via their return instruction. The returned value from a subroutine, if there is one, is placed into the special variable named result.

External routines can be functions, too. Often, these come in the form of a package designed to support a particular functionality and are called *extensions* or *function libraries*. External routines might also be the equivalent of internal subroutines, written in Rexx, except that they reside in a different file than that of the caller.

Rexx makes it easy to invoke external programs from your script, regardless of the language in which they are written. If the Rexx interpreter encounters a string in a script that does not correspond to its instruction set, it evaluates that expression and then passes it to the operating system for execution. So, it is simple to run operating system commands or other programs from a Rexx script. Chapter 14 illustrates how to do this. One of Rexx's great strengths is its role in issuing, controlling, and coordinating operating system commands. It is also easy to direct commands to other outside "environments" such as

text editors or other tools. Rexx is called a *macro language* because it is often used to provide programmability for various tools. For example, on mainframes Rexx is used as the macro language to program the widely used editors, XEDIT and the ISPF Editor.

There are a large variety of Rexx extensions and packages. For example, the open-source *Rexx/SQL* package provides an interface to a variety of relational databases from within Rexx scripts. Other examples include interfaces to *curses*, the text-screen control package; to *RexxXML*, for XML programming; to *ISAM*, the indexed sequential access method; to *TK* and *DW*, for easy GUI programming; to *gd*, for graphics images; *RxSock*, for TCP/IP sockets, and many other interfaces. Chapters 15 through 18 discuss and demonstrate some of these free and open-source packages. Chapter 29 discusses a few of the many interfaces to mainframe Rexx and how Rexx offers a high-level macro and interface language for mainframe interfaces and facilities. Appendix H lists several dozen of the many free and open-source interfaces that are available and tells how to locate them for downloading.

Internal Functions and Subroutines

Functions must always return exactly one result to the caller. Use the return instruction to do this. Subroutines may or may not send a result back to the caller via return, but they, too, end with the return instruction.

Functions may be invoked in either of two ways. One method codes the function name, immediately followed by arguments, wherever one might encode an expression:

```
returned_string = function_name(parameter_1, parameter_2)
```

The function is resolved and the string it returns is plunked right into the expression where it was coded. In this case, the assignment statement then moves that value to the variable returned_string. Since you can code a function anywhere you can code an expression, nesting the function within an if or do instruction is common:

```
if ( balanced_parentheses(string_in) ) = 'YES' then
```

Here the call to the function balanced_parentheses is nested within an if instruction to provide a result for the comparison. After the function balanced_parentheses has been run, its result is plunked right where it was encoded in the if instruction.

You can nest functions within functions, as shown in this return instruction from one of the sample scripts we discuss later in this chapter:

```
return substr(string,length(string),1) || ,
reverse(substr(string,1,length(string)-1))
```

Recall that the comma is the *line continuation character*. So, both of these lines constitute a single statement.

This return instruction features a complex expression that returns a single character string result to the caller. The first part of the expression nests the length function within the substr function; the second part nests length within substr within reverse. Yikes! Nesting is very powerful, but for the sake of clarity we don't recommend getting too fancy with it. Deeply nested expressions may show cleverness

but they become unintelligible if too complex. When complex code is developed for corporate, governmental, or educational institutions, the value of that code drops the moment the programmer who wrote it leaves the organization.

The second basic way to invoke a function is through the call instruction:

```
call function_name parameter_1, parameter_2
```

For example, to duplicate the code we looked at earlier where the invocation of the balanced_parentheses routine was nested within an if statement, we could have alternatively coded:

```
call balanced_parentheses string_in
if result = 'YES' then    /* inspect the result returned from the function call */
```

The result string from the function is automatically placed into the special variable named result and may be accessed from there.

Special variable result will be set to uninitialized if not set by a subroutine. In this case its value will be its own name in capitals: RESULT.

Subroutines may only be invoked by the call instruction. Encode this in the exact same manner as the second method for invoking functions:

```
call subroutine_name parameter_1, parameter_2
```

The special variable result contains a value *if* the subroutine passed back a value on its return instruction. Otherwise result will be set to uninitialized (the value RESULT). All uninitialized variables are their own names set to uppercase, so use this test to see if result was not set:

```
if result = 'RESULT' then say 'RESULT was not set by the subroutine.'
```

The built-in function symbol can also be used to see if any variable is uninitialized or whether it has been assigned a value. It returns the character string VAR if a variable has a value or the string LIT otherwise. We can apply it to see if result was assigned a value:

```
if symbol('RESULT') == 'VAR' then say 'A result was returned'
if symbol('RESULT') == 'LIT' then say 'No result was returned'
```

To summarize, here's a code snippet that shows how to organize a main routine (or *driver*) and its subroutine. The code shows that the call to the internal subroutine did not set special variable result:

```
/* Show whether RESULT was set by the CALL */
call subroutine_name

if result = 'RESULT'
    then say 'No RESULT was returned'
    else say 'A RESULT was returned'

if symbol('RESULT') == 'VAR'
    then say 'A RESULT was returned'
```

```
if symbol('RESULT') == 'LIT'
    then say 'No RESULT was returned'

exit 0

subroutine_name:
    return
```

The return instruction ends the subroutine, but does not include an operand or string to send back to the calling routine. The code snippet displays these messages when it returns from the subroutine:

```
No RESULT was returned
No RESULT was returned
```

Now change the last statement in the code, the return instruction in the subroutine, to something like this:

```
return 'result_string'
```

Or, change it to this:

```
return 0
```

Either encoding means that the special variable result is set to the string returned. After invoking the internal routine, the code snippet now displays:

```
A RESULT was returned
A RESULT was returned
```

When encoding subroutine(s) and/or functions after the main routine or driver, code an exit instruction at the end of the code for the main routine. This prevents the flow of control from rolling right off the end of the main routine and going into the subroutines.

Here is another example that is the exact same as that seen in the preceding example. However, we have coded it incorrectly by commenting out the exit instruction that follows the main routine. We have also added a statement inside the subroutine that displays the message: Subroutine has been entered.

Here's the code:

```
/* Show whether RESULT was set by the CALL */
call subroutine_name

if result = 'RESULT'
    then say 'No RESULT was returned'
    else say 'A RESULT was returned'

if symbol('RESULT') == 'VAR'
    then say 'A RESULT was returned'

if symbol('RESULT') == 'LIT'
    then say 'No RESULT was returned'
```

This script displays this output:

```
Subroutine has been entered

A RESULT was returned

A RESULT was returned

Subroutine has been entered <= this line results from no EXIT instruction!
```

This shows you must code an exit instruction at the end of the main routine if it is followed by one or more subroutines or functions. The last line in the sample output shows that the subroutine was entered incorrectly because an exit instruction was not coded at the end of the main routine. As with the subroutine's return instruction, it is optional whether or not to code a return string on the exit statement. In the preceding example, the exit instruction passed a return code of 0 to the environment.

What if we place the code of subroutines *prior* to that of the main routine? Here we located the code of the subroutine prior to the driver:

```
/* Shows why subroutines should FOLLOW the main routine */
subroutine_name:
    say 'Subroutine has been entered'
    return 0

call subroutine_name

if result = 'RESULT'
    then say 'No RESULT was returned'
    else say 'A RESULT was returned'

if symbol('RESULT') == 'VAR'
    then say 'A RESULT was returned'

if symbol('RESULT') == 'LIT'
    then say 'No RESULT was returned'
exit 0
```

Running this script displays just one line:

```
Subroutine has been entered
```

What happened was that Rexx starts at the top of the file and proceeds to interpret and execute the code, line by line. Since the subroutine is first in the file, it executes first. Its instruction return 0 caused exit from the program before we ever got to the main routine! Oops. Always place the code for any internal subroutines or functions *after* the main routine or driver.

Subroutines, Functions, and Modularity

We'll cover program structure in more detail later. For now, here are some basic rules of thumb:

- ☐ End each subroutine or function with the return instruction.
- ☐ Every function *must* have an operand on its return instruction.
- □ Subroutines may optionally have a result on their return instruction.
- ☐ Encode the exit instruction at the end of the code of the main routine or driver.
- □ Place subroutines and functions after the main routine or driver.

We saw that Rexx uninitializes special variable result when a called subroutine does not pass back a result string. If you ever need to uninitialized a Rexx variable yourself, code the drop instruction:

```
drop my_variable
```

This sets a variable you may have used back to its uninitialized state. It is now equal to its own name in all uppercase.

You can drop multiple variables in one instruction:

```
drop my_variable_1 my_variable_2 my_variable_3
```

Passing Parameters into a Script from the Command Line

Passing data into a script is important because this provides programs with flexibility. For example, a script that processes a file can retrieve the name of the file to process from the user. You can pass data elements into scripts by coding them on the same command line by which you run the script. Let's explore how this is accomplished.

Data passed into a script when it is invoked are called *command-line arguments* or *input parameters*. To invoke a Rexx script and pass it command-line arguments or parameters, enter something like this:

```
c:\Regina\pgms> script_name parameter_1 2 parameter_3
```

The script reads these three input strings parameter_1, 2, and parameter_3 with the arg instruction. arg automatically translates the input parms to uppercase. It is the equivalent of the instruction parse upper arg. If no uppercase translation is desired, use parse arg. Remember that a period following either of these instructions discards any more variables than are encoded on the arg or parse arg instruction. This example discards any arguments beyond the third one, if any are entered:

```
arg input_1 input_2 input_3 . /* read 3 arguments, translate to capitals */
```

Here is the same example coded with the parse arg instruction:

```
parse arg input_1 input_2 input_3 . /* read 3 arguments, no upper translation */
```

By default, the arg and parse arg instructions splice the input parameters into pieces based on their separation by one or more intervening spaces. If you ran the program like this:

```
c:\Regina\pgms> script_name parameter_1 2 parameter _3
```

You'd want to code this statement in the script to pick up the input arguments:

```
parse arg input_1 input_2 input_3 input_4 .
```

The resulting variable values would be:

```
input_1 = parameter_1
input_2 = 2
input_3 = parameter
input_4 = _3
```

As per the basic rules of parsing, encoding too many input parameters puts all the overflow either into the *placeholder variable* (the period) or into the last specified input variable on the parse arg instruction.

Entering too few input parameters to match the parse arg statement means that the extra variables on the parse arg will be set to uninitialized. As always, an uninitialized variable is equal to its own name in uppercase.

Passing Parameters into Subroutines and Functions

Say that our sample script needs to run a subroutine or function, passing it the same three input parameters. Code the subroutine or function call as:

```
call sub_routine input_1, input_2, input_3
```

Code a comma between each of the parameters in the call instruction. The string (if any) sent back from the call will be available in the special variable named result.

Code a function call just like the call to the previous subroutine. Or encode it wherever you would an expression, as illustrated earlier, in the form:

```
result_string = function_name(input_1, input_2, input_3)
```

Inside the function or subroutine, use either arg or parse arg to retrieve the arguments. The function or subroutine picking up the input parameters should encode commas that parallel those of the call in its arg or parse arg instruction:

```
arg input_1, input_2, input_3 .
or
parse arg input_1, input_2, input_3 .
```

Subroutines, Functions, and Modularity

The period or placeholder variable is optional. Presumably, the subroutine or function knows how many input parameters to expect and does not need it.

These examples illustrate the arg *instruction* retrieving the argument string passed to a script and splicing it apart into its individual pieces. There is also an arg *built-in function*. The arg function returns information about input arguments to the routine. For scripts called as functions or subroutines, the arg function either:

- ☐ Tells how many argument strings were passed in
- ☐ Tells whether a specific-numbered argument was supplied
- ☐ Supplies a specified argument

Let's look at a few examples. To learn how many arguments were passed in, code:

```
number_of_arguments = arg()
```

To retrieve a specific argument, say the third one, code:

```
get_third_argument = arg(3)
```

To see if the third argument exists (was passed or encoded in the call), write:

```
if (arg(3) == '') then say 'No third argument was passed'
```

or

```
if arg(3,'0') then say 'No third argument was passed'
```

The first of the two sample lines show that an input argument read by an internal routine will be the null string if it is not supplied to the routine. This differs from a command-line input argument that is read but not supplied, which is set to uninitialized (its own name in uppercase).

The second sample line shows one of the two options that can be used with the arg function:

- \square E (Exists) Returns 1 if the *n*th argument exists. Otherwise returns 0.
- □ (Omitted) Returns 1 if the *n*th argument was Omitted. Otherwise returns 0.

The arg function *only* supplies this information for scripts that are called as functions or subroutines. For scripts invoked from the operating system's command line, the arg function will always show only 0 or 1 argument strings. In this respect Rexx scripts invoked as commands from the operating system behave differently than scripts invoked as internal routines (functions or subroutines). This is one of the very few Rexx inconsistencies you'll have to remember: the arg function tells how many arguments are passed into an internal routine, but applied to the command-line arguments coming into a script, it always returns either 0 or 1.

A Sample Program

To see how parameters are passed into programs, and how code can be modularized, let's look at a couple sample programs. The first sample program consists of a brief script that reads information from the command line. This main routine or "driver" then turns around and calls a subroutine that performs the real work of the program. Then the driver displays the result from the subroutine on the user's screen.

Of course, the driver could actually be part of a larger application. For example, it might be a "service routine" shared among programs in the application. Whatever its use, the important principles to grasp are how code can be modularized and how information can be passed between modules.

The first sample program tells whether parentheses in a string are *balanced*. A string is said to be balanced if:

- Every left parenthesis has a corresponding closing right parenthesis
- □ No right parenthesis occurs in the string prior to a corresponding left parenthesis

Here are some examples. These input strings meet the two criteria and so are considered balanced:

```
(())
() () ()
return (qiu(slk) ())
(((((()())))))
if (substr(length(string,1,2)))
```

These are unbalanced strings. Either the numbers of left and right parentheses are unequal, or a right parenthesis occurs prior to its corresponding left parenthesis:

The last example shows that a script like this could be useful as a syntax-checker, or as a module in a language interpreter. You can actually use it to verify that your scripts possess properly encoded, balanced sets of parentheses.

To run the program, enter the string to verify as a command-line argument. Results appear on the next line:

```
C:\Regina\pgms> call_bal.rexx if(substr(length(string,1,2))
Parentheses are NOT balanced
```

Try again, this time adding one last right parenthesis to the input string:

```
C:\Regina\pgms> call_bal.rexx if(substr(length(string,1,2)))
Parentheses are balanced!
```

Here's the code for the caller. All it does is read the user's command-line input parameter and pass that character string to a function named balanced_parens that does the work. The function balanced_parens may be either internal or external—no change is required to its coding regardless of

where you place it. (However, you must be sure the operating system knows where to locate external functions. This often requires setting an environmental variable or the operating system's search path for called routines. We'll discuss this in detail later.)

```
CALL BAL:
                                                                      * /
/*
/*
       Determines if the parentheses in a string are balanced.
                                                                      * /
                                                                      * /
                     /* the string to inspect
    string .
arg
if balanced_parens(string) = 'Y' then /* get answer from function */
   say 'Parentheses are balanced!'
                                        /* write GOOD message ..or..*/
    say 'Parentheses are NOT balanced'
                                         /* write INVALID message
exit 0
```

Here's the internal or external function that figures out if the parentheses are balanced. The algorithm keeps track of the parentheses simply by adding 1 to a counter for any left parenthesis it encounters, and subtracting 1 from that counter for any right parenthesis it reads. A final counter (ctr) equal to 0 means the parentheses are balanced — that there are an equal number of left and right parentheses in the input string. If at any time the counter goes negative, this indicates that a right parenthesis was found prior to any possible matching left parenthesis. This represents another case in which the input string is invalid.

```
BALANCED PARENS:
/*
                                                                      * /
       Returns Y if parentheses in input string are balanced,
                                                                      * /
       N if they are not balanced.
balanced_parens:
arg string .
                   /* the string to inspect
                                                                      * /
ctr = 0
                        /* identifies right paren BEFORE a left one */
valid = 1
endstring = length(string)
                                       /* get length of input string */
do j=1 to endstring while (valid)
   char = substr(string,j,1)
                                       /* inspect each character
   if char = '(' then ctr = ctr + 1
   if char = ')' then ctr = ctr - 1
              then valid = 0
   if ctr < 0
end
if ctr = 0 then return 'Y'
           else return 'N'
```

Another way to code this problem is for the subroutine to return 1 for a string with balanced parentheses, and 0 if they are unbalanced. Then you could code this in the caller:

```
if balanced_parens(string) then
   say 'Parentheses are balanced!'
else
   say 'Parentheses are NOT balanced'
```

This allows coding the function as an *operatorless condition test* in a manner popular in programming in languages like C, C++, or C#. But remember that the expression in an if instruction must evaluate to 1 (TRUE) or 0 (FALSE) in Rexx, so the function *must* return one of these two values. A nonzero, positive integer other than 1 will not work in Rexx, unlike languages in the C family. A positive value other than 1 results in a syntax error in Rexx (we note, though, that there are a few Rexx interpreters that are extended to allow safe coding of operatorless condition tests).

Coding operatorless condition tests also runs counter to the general principle that a function or subroutine returns 0 for success and 1 for failure. Wouldn't balanced parentheses be considered "success"? This coding works fine but contravenes the informal coding convention.

The Function Search Order

Given that Rexx supports built-in functions, internal functions, and external functions, an important issue is how Rexx locates functions referred to by scripts. For example, if you write an internal function with the same name as a built-in function, it is vital to understand which of the two functions Rexx invokes when some other routine refers to that function name.

This issue is common to many programming languages and is called the *function search order*. In Rexx the function search order is:

- **1.** *Internal function* The label exists in the current script file.
- **2.** *Built-in function* Rexx sees if the function is one of its own built-in functions.
- **3.** External function Rexx seeks an external function with the name. It may be written in Rexx or any language conforming to the system-dependent interface that Rexx uses to invoke it and pass the parameter(s).

Where Rexx looks for external functions is operating-system-dependent. You can normally place external functions in the same directory as the caller and Rexx will find them. On many platforms, you must set an *environmental variable* or a *search path* parameter to tell the operating system where to look for external functions and subroutines.

The function search order means that you could code an internal function with the same name as a Rexx built-in function and Rexx will use *your* function. You can thus replace, or override, Rexx's built-in functions.

If you want to avoid this, code the function reference as an uppercase string in quotation marks. The quotation marks mean Rexx skips Step 1 and *only* looks for built-in or external functions. Uppercase is important because built-in functions have uppercase names.

With this knowledge, you can override Rexx functions with your own, while still invoking the built-in functions when you like. You can manage Rexx's search order to get the best of both worlds.


Recursion

A *recursive* function or routine is one that calls itself. Any recursive function could be coded in traditional nonrecursive fashion (or *iteratively*), but sometimes recursion offers a better problem solution. Not all programming languages support recursion; Rexx does.

Since a recursive function invokes itself, there must be some end test by which the routine knows to stop *recursing* (invoking itself). If there is no such end test, the program recurses forever, and you have effectively coded an "endless loop!"

Figure 8-2 pictorially represents recursion.

How Recursion Works

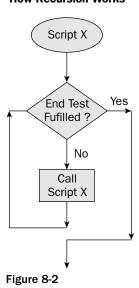

This sample recursive function reverses the characters within a given string—just like Rexx's reverse built-in function. If you feed it the character string abc, it returns the string cba.

The function calls itself to process each character in the input string and finds its "end test" when there are no more characters left in the string to process. Each time the function is entered, it returns the last character in the string and recurses to process the remaining string.

```
then return ''
else
  return substr(string,length(string),1) || ,
      reverse(substr(string,1,length(string)-1))
```

The reverse function uses the *strictly equal* operator (==). This is required because the regular "equals" operator pads item with blanks for comparisons, something that might not work in this function. The line that uses the strictly equal operator compares the input string to the *null string*, the string that contains no characters, represented by two back-to-back quotation marks (' '). This is the "end test" that tells the function to return, because it has processed all the characters in the original input string:

```
if string == '' /* here's the 'end recursion' condition *,
then return ''
```

The last two lines of the function show how to continue a statement across lines. Just code a comma (,) and the return instruction's expression spans into the next line. The comma is Rexx's *line continuation character*. Code it at any natural breakpoint in the statement. Between parts of a statement is fine; within the middle of a character string literal would not work. This is valid:

But this will fail with a syntax error, because the line continuation character appears in the middle of a quoted literal:

Of course, the trick to this program to reverse character strings is this one, heavily nested line of code:

```
return substr(string,length(string),1) || ,
    reverse(substr(string,1,length(string)-1))
```

The first portion of this statement always returns the last character in the substring being inspected:

```
substr(string,length(string),1)
```

An alternative way to code this is to use the right function, as in: right(string, 1).

The second portion of the return statement recursively invokes the reverse function with the remaining substring to process. This is the original string passed in, minus the last character (which was just returned to the caller):

```
reverse(substr(string,1,length(string)-1))
```

To test a program like this, you need a simple *driver* or some "scaffolding" to initially invoke the new reverse function. Fortunately, the rapid development that Rexx enables makes this easy. Coding a driver to test the new reverse function is as simple as coding these few lines:

This code reads an input string from the user as an input command-line argument. It invokes the recursive, user-written reverse function and displays the result to the user.

The say instruction in this code uses the special variable result to display the string returned from the reverse function on the user's display screen:

```
say 'The reversed string is:' result /* display the RESULT */
```

Our new reverse function has the same name and functionality as Rexx's own, built-in reverse function. Which will Rexx run? The *function search order* tells us. Assuming that the reverse function we coded is internal, Rexx invokes it, because user-written internal functions have priority over Rexx's built-in functions in the function search order. If we want to use the built-in Rexx reverse function instead, we would code the name of the function in quoted uppercase letters. These two lines show the difference. This line invokes our own reverse function:

```
call reverse string /* call our own REVERSE function */
In contrast, this statement runs Rexx's built-in reverse function:

call 'REVERSE' string /* use the Rexx built-in REVERSE function */
```

More on Scoping

Developers place internal functions and subroutines after the main routine or driver in the script file. Here's the basic prototype for script structure where the main script has subroutines and/or functions:

```
main_routine:
    call my_function parameter_in
    call my_subroutine parameter_in
    exit 0

my_function: procedure
    return result_string

my_subroutine: procedure
    return
```

Rexx does not require any label for the main routine or driving portion of the script, but we recommend it as a good programming practice. A Rexx <code>label</code> is simply a name terminated with a colon. In this script, we've identified the driver routine with the label <code>main_routine</code>: . This is good programming practice in very large programs because it may not always be obvious where the logic of the driver really starts. In other words, if there is a long list of variable declarations or lots of initialization at the top of a script, identifying where the "real" work of the main routine begins can sometimes be helpful.

A key issue in any large program is *scoping* — which of the caller's variables are available for reading and/or updating by a called function or subroutine. In Rexx, the procedure instruction is the basic tool for managing variable scoping. procedure is encoded as the first instruction following the label in any function or subroutine for which it's used.

The procedure instruction protects all existing variables by making them unknown to any instructions that follow. It ensures that the subroutine or function for which it is encoded cannot access or change any of its caller's variables. For example, in the reverse function, we coded this first line:

```
reverse: procedure
```

This means the reverse routine cannot read or update any variables from its caller—they are protected by the procedure instruction. This is a good start on proper modularity, but of course, we need a way to give the reverse routine access to those variables it *does* need to access. One approach is to pass them in as arguments or parameters, as we did in calling the reverse function, with this general structure:

The procedure instruction protects all variables from the function or subroutine. This function cannot even read any of the caller's variables. It knows only about those passed in as input parameters, parm_1 and parm_2. It can read the variables that are passed in via arg, and it sends back *one* result string via the return instruction. It cannot change the value of any of the arg variables in the caller. These are passed in on a read-only basis to the function or subroutine, which can only pass back one string value by a return instruction.

Another approach to passing data items between routines is to specify *exposed variables* on the procedure instruction. These variables are available for both reading *and updating* by the invoked routine:

```
function_name: procedure expose variable_1 array_element.1
```

In this case the function or subroutine can read and manipulate the variable variable_1 and the specific array element array_element.1. The function or subroutine has full read and update access to these two expose'd variables.

With this knowledge, here's an alternative way to structure the relationship between caller and called routine:

```
exit 0

subroutine_name: procedure expose parm_1 parm_2

/* refer to and update the variables parm_1 and parm_2 as desired */
parm_1 = 'New value set by Sub.'

parm_2 = '2nd new value set by Sub.'

return result_string /* return result to caller */
```

The output from this code demonstrates that the subroutine changed the values the caller originally set for variables parm_1 and parm_2:

```
The function result is: RESULT_STRING
The changed variables are: New value set by Sub. 2nd new value set by Sub.
```

The procedure instruction limits variable access in the called function or subroutine. Only those variables specifically named on the procedure expose instruction will be available to the called routine.

To summarize, there are two basic approaches to making caller variables available to the called routine. Either pass them in as input arguments, or code the procedure expose instruction followed by a variable list. The called function or subroutine cannot change input arguments—these are read-only values passed by the caller. In contrast, any variables listed on the procedure expose statement can be both read and updated by the called function or subroutine. The calling routine will, of course, "see" those updated variable values.

Two brief scripts illustrate these principles. This first demonstrates that the called routine is unable to change any variables owned by its caller because of the procedure instruction coded on the first line of the called routine:

```
/* This code shows that a PROCEDURE instruction (without an EXPOSE
/* keyword) prevents a called function or subroutine from reading
/* or updating any of the caller's variables.
/* Argument-passing and the ARG instruction gives the called
/* function or subroutine READ-ONLY access to parameters.
calling_routine:
   variable_1 = 'main'
   variable_2 = 'main'
   call my_subrtn(variable_1)
   say 'main:' variable_1 variable_2
                                              /* NOT changed by my_subrtn */
   exit 0
my_subrtn: procedure
   arg variable_1
                                               /* provides read-only access */
   say 'my_subrtn:' variable_1 variable_2
                                               /* variable_2 is not set
   variable_1 = 'my_subrtn'
```

```
variable_2 = 'my_subrtn'
say 'my_subrtn:' variable_1 variable_2
return
```

This is the output from this script:

```
my_subrtn: MAIN VARIABLE_2
my_subrtn: my_subrtn
main: main main
```

The first output line shows that the subroutine was passed a value for variable_1, but variable_2 was not passed in to it. The subroutine accessed the single value passed in to it by its arg instruction. The second line of the output shows that the called routine locally changed the values of variables variable_1 and variable_2 to the string value my_subrtn—but the last line shows that these assignments did not affect the variables of the same names in the caller. The subroutine could not change the caller's values for these two variables. This is so because the procedure instruction was encoded on the subroutine but it did not list any variables as expose 'd.

This next script is similar but illustrates coding the procedure expose instruction to allow a called routine to manipulate the enumerated variables of its caller:

```
/* This code shows that ONLY those variables listed after EXPOSE
/* may be read and updated by the called function or subroutine.
calling_routine:
  variable_1
                = 'main'
  array_name. = 'main'
                                  /* The called routine can update
  array_element.1 = 'main'
                                     /* array elements if desired.
                                                                     */
               = 'main'
  not_exposed
  call my_subrtn
                                      /* don't pass parms, use EXPOSE */
  say 'main:' variable_1 array_name.4 array_element.1 not_exposed
  exit 0
my_subrtn: procedure expose variable_1 array_name. array_element.1
  say 'my_subrtn:' variable_ 1 array_name.4 array_element.1 not_exposed
                                     /* These will be set back in the */
  variable_1 = 'my_subrtn'
  array_name.4 = 'my_subrtn'
                                      /* caller, since they were */
  array_element.1 = 'my_subrtn'
                                     /* on the PROCEDURE EXPOSE.
     say 'my_subrtn:' variable_1 array_name.4 array_element.1 not_exposed
  return
```

The output from this script is:

```
my_subrtn: main main moin NOT_EXPOSED
my_subrtn: my_subrtn my_subrtn NOT_EXPOSED
main: my_subrtn my_subrtn main
```

The first output line shows that the subroutine accessed the three caller's variables listed on the procedure expose instruction. This shows the three variables set to the string value main. The fourth variable shows up as NOT_EXPOSED because the subroutine did not list it in its procedure expose statement and cannot access it.

The second output line shows that the subroutine set the value of the three variables it can change to the value my_subrtn. This line was displayed from within the subroutine.

The last output line confirms that the three variables set by the subroutine were successfully passed back to and picked up by the caller. Since only three variables were passed to the subroutine, the fourth variable, originally set to the string value main by the caller, still retains that same value.

What about external routines? Invoke them just like internal routines, but the Rexx interpreter always assigns them an implicit procedure instruction so that all the caller's variables are hidden. You cannot code a procedure expose instruction at the start of the external routine. Pass information into the external routine through input arguments. Code a return instruction to return a string from the external routine. Or, you can code an exit instruction with a return value.

For internal routines, if you code them without the procedure instruction, all the caller's variables are available to the internal routines. All the caller's variables are effectively global variables. Global variables are values that can be changed from any internal routine. Global variables present an alternative to passing updatable values into subroutines and functions via the procedure expose instruction.

Developers sometimes like using global variables because coding can be faster and more convenient. One does not have to take the time to consider and encode the correct procedure expose instructions. But global variables are not considered a good programming practice because they violate one of the key principles of modularity — that variables are explicitly assigned for use in specific modules. So that you recognize this scenario when you have to maintain *someone else's* code, here is the general script structure for using global variables:

```
^{\prime \star} Illustrate that Global Variables are accessible to ALL internal routines ^{\star \prime}
main_routine:
   a = 'this is a global variable!'
   call my subroutine
   say 'Prove subroutine changed the value: ' a
   feedback = my_function()
   say 'Prove the function changed the value: ' a
   exit 0
my_subroutine:
   /* all variables from MAIN_ROUTINE are available to this routine for
      read and or update */
   a = 'this setting will be seen by the caller'
   return
my_function:
   /* all variables from MAIN_ROUTINE are available to this routine for read
      and or update */
   a = 'this new value will be seen by the caller'
   return 0
```

The program output shows that the two internal routines are able to change any variable values in the calling routine at will. The two output lines are displayed by the driver. The latter portion of each line shows that the subroutine and function were able to change the value of the global variable named a:

```
Prove subroutine changed the value: this setting will be seen by the caller Prove the function changed the value: this new value will be seen by the caller
```

All you have to do to use global variables is neglect to code the procedure instruction on subroutines on functions. This is convenient for the developer. But in large programs, it can be extremely difficult to track all the places in which variables are altered. *Side effects* are a real possibility, unexpected problems resulting from maintenance to code that does not follow the principles of structured programming and modularity.

To this point, we've discussed several ways to pass variables into and back from functions and subroutines. This chart summarizes the ways to pass information to and from called internal subroutines and functions:

Technique	Internal Routine's Variable Access	Comments
Pass arguments as input parameters	Read-only access to the passed variables <i>only</i>	Standard for passing in read-only values
procedure expose	Read and update access to expose'd variables only	Standard for updating some variables while hiding others
procedure (without expose)	Hides all the caller's variables	Standard for hiding all caller's variables
Global variables	Read and update access to all the caller's variables	Violates principles of modularity; works fine but not recommended
return expression	Send back one string to the caller	Standard for passing back one item of information

Whichever approach(es) you use, consistency is a virtue. This is especially the case for larger or more complex programming applications.

Another Sample Program

This next sample script illustrates a couple of the different ways to pass information into subroutines. One data element is passed in as an input argument to the routine, while the other data item is passed in via the procedure expose instruction.

This program searches a string and returns the rightmost occurrence of a specified character. It is a recursive function that duplicates functionality found in the built-in lastpos function. It shows how to pass data items to a called internal routine as input parameters and how to use the procedure expose instruction to pass in updateable items.

```
/*
   RINDEX:
                                                                     * /
/*
                                                                     * /
/*
       Returns the rightmost position of a byte within a string.
                                                                     * /
rindex: procedure expose search_byte
                                                  /* read the string */
parse arg string
say string search_byte
                                     /* show recursive trace for fun */
string_length = length(string) /* determine string length
string_length_1 = length(string) -1 /* determined string length - 1 */
if string == ''
                        /* here's the 'end recursion' condition
   then return 0
else do
   if substr(string,string_length,1) == search_byte then
     return string_length
     new_string_to_search = substr(string,1,string_length_1)
   return rindex(new_string_to_search)
```

This script requires two inputs: a character string to inspect for the rightmost occurrence of a character, and the character or "search byte" to look for.

When invoked, the function looks to see if the last character in the string to search is the search character. If yes, it returns that position:

```
if substr(string,string_length,1) == search_byte then
  return string_length
```

If the search character is not found, the routine calls itself with the remaining characters to search as the new string to search:

```
new_string_to_search = substr(string,1,string_length_1)
return rindex(new_string_to_search)
```

The end condition for recursion occurs when either the character has been found, or there are no more characters in the original string to search.

The function requires two pieces of input information: the string to inspect, and the character to find within that string. It reads the string to inspect as an input parameter, from the parse arg instruction:

```
parse arg string /* read the string */
```

The first line in the function gives the program access to the character to locate in the string:

```
rindex: procedure expose search_byte
```

The two pieces of information are coming into this program in two different ways. In a way this makes sense, because the character to locate never changes (it is a global constant), but the string that the function searches is reduced by one character in each recursive invocation of this function. While this program works fine, it suggests that passing in information through different mechanisms could be confusing. This is especially the case when a large number of variables are involved.

For large programs, consistency in parameter passing is beneficial. Large programs become complicated when programmers mix internal routines that have procedure expose instructions with routines that do not include this instruction. Rexx allows this but we do not recommend it. Consistency underlies readable, maintainable code. Coding a procedure or procedure expose instruction for *every* internal routine conforms to best programming practice.

Summary

This chapter describes the basic mechanisms by which Rexx scripts are modularized. Modularity is a fundamental means by which large programs are rendered readable, reliable, and maintainable. Modularity means breaking up large, complex tasks into a series of smaller, discrete modules. The interfaces between modules (the variables passed between them) should be well defined and controlled to reduce complexity and error.

We covered the various ways to pass information into internal routines and how to pass information from those routines back to the caller. These included passing data elements as input arguments, the procedure instruction and its expose keyword, and using global variables. We discussed some of the advantages and disadvantages of the methods, and offered sample scripts to illustrate each approach. The first sample script read a command-line argument from its environment and passed this string as an input argument to its subroutine. The subroutine passed a single value back up to its caller by using the return instruction. The last sample script was recursive. It invoked itself as a subroutine and illustrated how the procedure expose instruction could be used to pass values in recursive code. This latter example also suggests that consistently encoding the procedure expose instruction on every routine is a good approach for large programming projects. This consistent approach reduces errors, especially those that might otherwise result from maintenance on large programs that use global variables.

Test Your Understanding

- **1.** Why is modularity important? How does Rexx support it?
- **2.** What's the difference between a subroutine and function? When should you use one versus the other?
- **3.** What is the difference between internal and external subroutines? How is the procedure instruction used differently for each?
- **4.** What is the function search order, and how do you override it?
- **5.** What are the basic ways in which information is passed to/from a caller and its internal routines?
- **6.** What happens if you code a procedure instruction without an expose keyword? What's the difference between parameters passed in to an internal subroutine and read by the arg instruction versus those that are exposed by the procedure expose instruction?
- **7.** In condition testing, TRUE is 1 and FALSE is 0. What happens when you write an if instruction with a condition that evaluates to some nonzero integer other than 1?

Debugging and the Trace Facility

Overview

Where scripting languages really shine is in the fast, easy program development they make possible. Their interpretive nature leads to built-in tools that make debugging much easier.

Rexx offers tremendous power in its *tracing facility*. Implemented by its trace instruction, the trace built-in function, and a variety of supporting functions and features, the tracing facility enables you to quickly and easily step through your code as it executes. Rexx will display the results of expression evaluation, variable contents, lines of code as they are translated and run, program position . . . indeed, almost anything going on in the script. You can *single-step* through your code, allowing Rexx to pause before or after each line of the source code. You can execute Rexx statements while your script is paused, for example, to inspect or alter the values of variables. At anytime, you can easily turn tracing on, off or to some different level of granularity. The trace facility makes debugging even the most complex logic a simple affair. This chapter describes the trace facility and how to use it in detail.

The say Instruction

Figure 9-1 shows three basic approaches to debugging Rexx scripts.

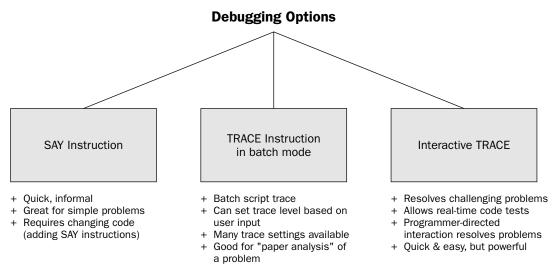


Figure 9-1

Let's start with the most basic approach to debugging. This simple technique temporarily adds extra say statements to the code to display variable values. Rexx makes this easy because of the manner in which the say instruction automatically concatenates expressions.

Take as an example the rindex program in the previous chapter. Recall that this script returns the rightmost position of a given character within a string. When first written and run, this program displayed this output as its answer regardless of the input search string:

```
The rightmost byte position is: 0
```

Clearly, something was wrong. Simply adding one line with a say instruction at the start of the routine made the problem evident:

```
say string search_byte
```

When the program ran with this debugging aid, here were the results from the say instruction:

```
D:\Regina\pgms>regina rindex.rexx abc b
abc SEARCH_BYTE
ab SEARCH_BYTE
a SEARCH_BYTE
SEARCH_BYTE
SEARCH_BYTE
The rightmost byte position is: 0
```

The value of the byte to search for, entered in the command line as the character b, was not being picked up by the routine. Instead of the character string SEARCH_BYTE, we should have seen the input parameter string b repeated on each output line.

After adding the <code>expose search_byte</code> keywords to the <code>procedure</code> instruction, the program result was what we would expect:

```
D:\Regina\hf>regina rindex.rexx abc b
abc b
ab b
The rightmost byte position is: 2
```

So, the problem was improperly passing a value to a subroutine. The say instruction is ideal for this quick debugging because it automatically concatenates operands for instant output.

The trace Instruction

While quickly adding a say instruction to display some variable values or to trace execution of a program works well, many debugging situations require more powerful techniques. The trace instruction provides information at any level of detail and fulfills the need for both power and flexibility.

Typical encoding of the trace instruction is simple:

```
trace [setting]
```

where the *setting* is any one of the following values:

Trace Setting	Name	Function
A	All	Traces all clauses before execution.
С	Commands	Traces all host commands before execution. This allows you to ensure that the command you're sending to the operating system (or other external environment) is correct. It's especially useful if the script dynamically creates or prepares those commands. If the command causes error or failure, its return code also appears.
Е	Error	Traces any host command that results in error or failure after it executes.
F	Failure	Traces any host command that fails along with its return code.
I	Intermediates	Traces all clauses before their execution, including intermediate results during expression evaluation.
L	Labels	Traces labels as execution runs through them.
N	Normal	Nothing is traced except that host commands that fail are traced after their execution, along with their return codes.
О	Off	Nothing is traced.
R	Results	Traces clauses before their execution along with the final results of expression evaluation. Displays values assigned from pull, arg, and parse instructions.

When is each of these trace settings most useful? This setting is the default:

```
trace n
```

It traces nothing except failed host commands. It is minimally intrusive and is a good default value for working programs.

trace r is recommended for general-purpose debugging. It traces clauses before they execute and the final results of expression evaluation. It also shows when values change by pull, arg, and parse instructions. When you need to run a trace, trace r is usually where to start. If problems persist, trace i gives fuller detail. It gives everything that trace r does plus includes the details of intermediate expression evaluation.

If you're unsure about what routines are being entered and executed, try trace 1. This lists all labels program execution passes through and shows which internal routines are entered and run. It's an easy way to determine if a subroutine or function you coded is being entered and executed at the proper time.

If the problem is that commands to the host operating system are failing, trace c will trace all host commands before their execution. For any that cause an error or fail, it also shows the return code from the command. trace e and trace f are weaker forms of trace c that trace host command errors and failures, respectively. We recommend trace c as simplest and most complete if problems are occurring in executing host commands.

Where does one code the trace instruction? Anywhere in the code you like. A simple approach is to code one trace instruction near the very top of the program. It can be set to trace n (the default), and then changed to any other value desired during debugging. Just remember to set it back to trace n once debugging is completed. This approach is simple and consistent but does require changing the code to change the trace setting.

Another approach is to code a trace instruction at the start of the program, then have the program read the trace option dynamically, from the outside environment. For example, the program could prompt the user to enter the trace setting. Or, it might accept it as an optionally coded command-line argument to the program. Or, the program could even read this information from a "control file" or configuration file that dictates program behavior. For example, under Windows you could use an .ini file to configure tracing. Under Unix or Linux, you might use a config file.

However you set the trace option, you can code as many trace instructions as you like in a single script. These can flip the trace off or on, or set different levels of trace detail appropriate to different routines or sections of code. Scripts can dynamically control their trace levels themselves.

The trace instruction accepts the setting as a constant (a string literal or symbol), or it can be encoded as a variable or even as an expression to evaluate with the optional value keyword. These are the two basic formats for the trace instruction:

```
trace [setting]

or

trace value [expression]
```

Here's how to set the trace level by using a variable:

```
trace_variable = 'r'
trace value trace_variable
```

The trace instruction can be coded multiple times in a program, and you can turn tracing on or off (by trace o) as desired. This is mainly of use in very large programs, where you really want to zero in only on problems occurring in a newly added routine or better understand the effects of newly changed or problem code.

Let's look at some examples. Here is the output that results from placing a trace r instruction in the rindex function immediately after the 1st line of code (after the procedure instruction):

```
D:\Regina\hf>regina rindex.rexx ab b
  16 *-* parse arg string
                                              /* read the string
                                                                               * /
     >>>
           "ab"
  18 *-* say string search_byte
                                              /* show recursive trace for fun
                                                                               * /
     >V/>
           "ab"
     >V>
ab b
  20 *-* string_length = length(string)
                                             /* determine string length
                                                                               * /
     > \7>
           "ab"
  21 *-* string_length_1 = length(string) -1 /* determined string length - 1
     >V>
  23 *-* if string == ''
                                      /* Here's the 'end recursion' condition. */
     >V>
          "ab"
  25 *-* do
          if substr(string, string_length, 1) == search_byte then
     >V>
     >V>
            "2"
          "b"
     >V>
  27 *-* return string_length
     >V>
          "2"
The rightmost byte position is: 2
```

With trace r, line 16 shows how the parse arg instruction assigns values on entry to this function. Every expression appears *prior* to execution, then the result to which it evaluates. The listing shows that this trace setting resolves most debugging needs handily.

If you continue to have trouble, change the trace r to trace i and see the intermediate results of expression evaluation as well. This makes for longer, more complex output that you'll want to see only if you're having real trouble in debugging.

Let's take out the trace instruction in the rindex function, and instead place a single trace 1 at the top of the driver program. This traces all the labels the script execution passes. In this case, it verifies that the driver routine invokes the rindex function:

```
D:\Regina\hf>regina rindex abc a
   14 *-* rindex:
```

The trace 1 label trace is great for automatically displaying which internal routines are called during a large program. It gives more concise output than trace r when you're just worried about which routines are being called and when. Use it for those situations in which you're not sure if a routine is being called or if it is not clear how often a routine is invoked.

To debug scripts that issue operating system commands, trace c is a good choice. It traces host commands *prior* to execution, and it gives the return code from any command that results in error or failure. To check its output, here's a simple test program that we ran under Windows. This program intends to issue the dir (list directory) command to Windows, but the command was misspelled as dri:

Running this script gives this output:

```
3 *-* 'dri'
'dri' is not recognized as an internal or external command,
operable program or batch file.
+++ RC=1 +++
```

The output clearly shows the problem with the operating system command that was issued.

trace e shows any host command that results in error or failure and its return code, while trace f shows host commands that result in failure and their return code. We recommend trace c because it always lists the command that caused the problem.

Reading Trace Output

Trace output is designed to be easy to read. The preceding example shows that lines are numbered for easy identification. Right after the line number is the identifier *-* and the source line of code from the program. The symbol >>> identifies the value assigned to variables as a result of parsing or a value returned from an internal routine. For example, look at these two lines from the trace of the preceding rindex function:

```
16 *-* parse arg string /* read the string */
>>> "ab"
```

The trace output on the second line shows that this string was assigned to the variable string as a result of the parse arg instruction.

When the trace shows the contents of a variable, it precedes with this symbol >V>. These two statements show that the string sent back via the return instruction is "2":

```
27 *-* return string_length
>V> "2"
```

Notice how the trace is indented to convey more information. The strings displayed on the screen by the say instruction start on the left, while program statements and variable contents are indented. This

sample code is pretty linear, but where nesting is more involved, indentation makes the trace output much easier to follow.

For many programs, just these simple rules are all that is required to interpret trace output. Here are the trace output identifiers you might encounter:

Trace Output Identifier	Meaning
* _ *	A source line or clause
+++	A trace message
>>>	The result of an expression (for trace r), a value assigned to a variable from parsing, or the string returned by an internal function or subroutine
>.>	Identifies a what is assigned to a placeholder(the period) during parsing

These output prefixes appear only if trace intermediates (trace i) is in effect:

Trace Output Identifier	Meaning
>V>	Identifies variable contents
>L>	Identifies a literal string
>F>	The result of a function call
>P>	The result of a prefix operation
>0>	The result of an operation on two items
>C>	Contents of a compound (array) variable after substitution and before use

The trace Function

The trace instruction enables scripts to dynamically turn the trace facility off and on, and to specify the level of detail provided by the trace. In addition to the trace instruction, there is also a trace built-in function. The trace function returns the current value of the trace, and optionally sets the trace level to a new value.

When coded without an input parameter, the trace function returns the current trace setting:

```
say trace() /* display current trace setting */
```

An input argument can be coded to set the trace:

The allowable values for the trace function are the exact same as those for the trace instruction. The following table lists the possible trace function values. Since these values are the same as those for the trace instruction, you can review the trace instruction table near the beginning of this chapter for a full explanation of each setting. This table lists the one-word meanings of the options for easy recall:

Trace Setting	Meaning
A	All
С	Commands
Е	Errors
F	Failure
I	Intermediates
L	Labels
N	Normal
0	Off
R	Results

When the trace function includes an operand, it returns the current trace setting; then it alters the trace level to the new setting. Look at these three instructions run in sequence:

```
say trace() == N /* displays the default setting */
say trace('C') == N /* returns current trace setting, then alters it */
say trace() == C /* displays the current trace setting */
```

Interactive Tracing

So far we have discussed the trace setting as if it is something one turns on or off (multiple times if desired). Then you read its output after the script executes. This is a "batch" approach to debugging. In fact, one of the biggest benefits of tracing is the potential to pause the script at desired points and perform real-time operations, called *interactive tracing*.

To start interactive tracing, code the trace instruction with a question mark (?) preceding its argument. For example, this statement starts interactive tracing for results:

```
trace ?r /* turn on interactive tracing for Results */
```

Here's another example. This statement turns interactive tracing on for commands:

```
trace ?c /* turn on interactive Command trace */
```

The ? is a toggle switch. If tracing is off, this it turns on; if tracing is on, this turns it off. The first trace instruction or function you execute with ? encoded turns tracing on. The next one that executes with the question mark will turn it off.

When in *interactive mode*, the Rexx interpreter pauses after each statement or clause. Or, to be more precise, the Rexx interpreter pauses after executing each statement and displays the next statement to execute. At this point, you can perform any one of three actions listed in the following table:

Your Action	Result	
Press the <enter> key (also referred to as entering a null line)</enter>	The interpreter continues until the next point at which it should pause.	
Enter an equals sign =	The interpreter reexecutes the last clause. This allows you to "go back" one clause, make changes, and allow it to be rerun. For example, you could alter the value of a variable or change how an if instruction might be evaluated.	
Enter any Rexx clause or expression or statement	Rexx immediately executes what you've entered.	

The last option listed in this table bears some explanation. When the interpreter pauses, you can enter any valid Rexx clause, expression, or statement. The interpreter then immediately executes what you've entered. This allows you to change the value of variables to see how the program will respond. For example, you could enter an executable statement like this to alter a variable's value and see how this alters the script's execution:

```
my_variable = '123'
```

As another example, you could enter statements to display the contents of an array. This would allow you to verify that the array contains what you think it should at that point in your program:

```
do j = 1 to 5; say array_name.j ; end ;
```

You can even enter a statement to change the level of detail in the trace output, or you can run any other valid Rexx statement.

Interactive tracing lets you *single-step* through a script, inspecting and then running that code one clause at a time. You can inspect or change variables at will, see how code changes would affect execution, change various aspects of the environment, and alter the trace level itself.

Settings for the trace instruction are saved and restored across internal routines. If you enter an internal routine of no interest, merely turn off the trace:

```
trace o /* turn trace off */
```

The original trace setting will be restored when the caller is reentered.

Trace options are one of the few places in which Rexx uses abbreviations. Normally, the language uses full words for enhanced readability. The reason the trace instruction is an exception is that interactive tracing allows terse input from the keyboard so that the developer does not have to type so much and can work with simple mnemonic abbreviations when debugging.

Sometimes during a trace, its useful to be able to "skip ahead" a number of clauses with the interactive trace temporarily turned off. To do this, code a negative number on the trace instruction. This tells the interpreter to skip tracing a certain number of clauses, and then to resume as before. For example, this statement skips tracing the next 50 clauses, after which tracing resumes:

```
trace -50
```

You can also code a positive number on the trace instruction to skip a specified number of interactive pauses. For example, this instruction skips the next five interactive pauses, then resumes tracing as before:

```
trace 5
```

Some Rexx implementations allow turning on the trace externally, so you do not have to alter your script to trace it. An example is mainframe Rexx, described in detail in Chapter 29. Mainframe Rexx under operating systems such as VM and OS permits *immediate commands*, which can alter the trace level from outside the script while the script executes. All standard Rexx interpreters support internally changing the trace through the trace instruction and trace function.

Summary

As an interpreted scripting language, Rexx offers superior debugging facilities. Chief among them is interactive tracing, by which you can dynamically inspect and even alter your script's variables and its execution.

In most cases a simple batch approach to turning on the trace quickly resolves any programming problem. But when called for the full power of a completely interactive tracing facility is available. Using it, there are very few logic and programming errors you cannot quickly rectify. The trace facility is a big advantage of Rexx scripting versus programming in traditional compiled programming languages. Interacting tracing can dramatically reduce the time spent in debugging and resolving logic errors.

Test Your Understanding

- **1.** What is the default setting for the trace instruction? What settings are recommended for:
 - ☐ General-purpose debugging
 - Seeing which subroutines and internal functions are being entered and executed
 - Viewing intermediate results of all clauses
- 2. Your script issues commands to the operating system, but they are failing. What do you do?
- **3.** How do you turn interactive tracing on? Off?
- **4.** How do you single-step through the code of a script as it executes?

Errors and Condition Trapping

Overview

Full-featured programming languages require a mechanism through which programmers can catch, or *trap*, exceptions or errors. In Rexx, this is often referred to as *exception handling* or *condition trapping*.

Rexx offers a simple, but serviceable, means for trapping exceptional conditions. When an exception occurs, control is transferred to a routine to address the error. After the error routine handles the condition, execution of the primary script can resume.

This chapter explores Rexx's exception-trapping mechanism and the way in which you can use it in scripts to identify, capture, and manage errors. First, we'll discuss the specific kinds of errors that Rexx can trap. We'll discuss how to set up, or *enable*, error trapping. Then we'll take a look at a program that illustrates the exception-trapping mechanism. We'll progressively improve this program to expand its error-trapping capabilities and demonstrate different approaches to managing errors. We conclude by mentioning some of the limitations of exception conditions in standard Rexx, and how some Rexx interpreters extend beyond the ANSI standards to provide more generalized error trapping.

Error Trapping

When an error condition occurs, it is considered to be *raised*. Rexx interpreters that adhere to the TRL-2 standard allow the raising of six different error conditions, while the ANSI-1996 standard adds a seventh error condition. The table below lists all the error conditions:

Error Condition	Use
ERROR	Raised when a host command indicates an error upon return.
FAILURE	Raised when a host command indicates failure.
HALT	Raised by an external interrupt to a program. Example: the user presses Control-C (aka Ctrl-C).
NOVALUE	Raised when a variable that is to be used has not been assigned a value. The invalid variable reference could occur in an expression, in a parse template, or in a procedure or drop instruction.
NOTREADY	Raised by an input/output (I/O) error on a device unable to handle the I/O request.
SYNTAX	Raised by a syntax or runtime error in the script.
LOSTDIGITS	Raised when an arithmetic operation would cause the loss of digits. Significant digits in the result exceed the number of significant digits currently set by numeric digits or the system default of nine significant digits. (This trap was added in the ANSI-1996 standard and may not be present in Rexx implementations that adhere to the earlier TRL-2 standard.)

How to Trap Errors

The procedure to manually trap errors is simple. First, code either a signal or call statement in your script to identify the error you wish to intercept. This instruction can optionally specify the name of the routine to transfer control to when the error occurs. Second, code the routine to handle the error. Rexx transfers control to this trap routine based on the label encoded in the signal or call statement that refers to that error condition.

If the signal or call statement does not the specify the name of the error routine to which to transfer control, by default Rexx transfers control to a routine with the same name as that of the error. For example, say you code:

```
signal on novalue
```

This statement enables the NOVALUE error condition without specifically naming the error routine to handle it, so Rexx assumes that it will find an error routine named NOVALUE to handle the condition.

Here's the basic coding template for how to enable and code for error conditions:

```
main_routine:
    signal on novalue name novalue_handler
    /* main_routine's code goes here. */
```

```
exit

novalue_handler:


/* Code to handle the NOVALUE error goes here. */

signal main_routine /* go back to the main_routine after error-handling */
```

Figure 10-1 shows the basic logic of conditions or error handling diagrammatically.

Condition Trapping

signal on condition name label_name

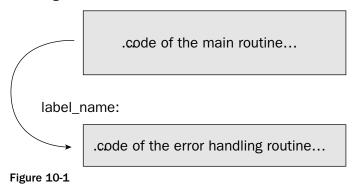

Remember that we previously saw the signal instruction used in a manner similar to an unconditional GOTO statement. This is a new form of the signal statement that sets up and enables a condition trap.

In the sample code, this line enables the trap for the NOVALUE condition and names the routine that will handle this error:

```
signal on novalue name novalue_handler
```

This line does *not* immediately transfer control to the routine to which it refers; it only *enables* the trap so that the error routine will be invoked when and if the exception condition named on the signal statement (the NOVALUE condition) occurs.

The name keyword is followed by the name of the error routine for that condition. In this example, the name of the routine that will be run when the NOVALUE condition occurs is novalue_handler. Somewhere later in the code there *must* be a label that identifies the routine that handles the error condition. This error-handling code performs any appropriate processing for the specified condition. In most cases, error routines return control to the point of invocation after printing an error message or performing other corrective action. But they could end the script or take any other action desired.

The signal or call instructions can be coded without explicitly specifying the name of the trap routine. In this case, the label of the error routine must be the same as the condition that is raised. Here are examples:

```
signal on error /* enables ERROR trap to be handled by routine named ERROR: */
signal on novalue /* NOVALUE condition requires a routine labeled NOVALUE: */
call on failure /* FAILURE errors are handled by a routine labeled FAILURE: */
```

We'll get into the differences between signal on and call on later. For now, note that signal can be coded with all seven conditions but that call cannot be coded with the SYNTAX, NOVALUE, and LOSTDIGITS errors. call enables a smaller set of error-condition routines.

A Sample Program

Here's a simple script that illustrates how to trap syntax or runtime errors. The program prompts the user to enter a Rexx expression or statement. Then it executes the interpret instruction to evaluate that expression and execute it. The prompt/interpret loop continues indefinitely until the user enters the letters exit. At that point the interpret instruction executes the exit instruction the user entered, which terminates the program.

Besides showing how to trap an error condition, this is a useful script because it allows you to interactively test various Rexx statements. You can purposely enter a statement with invalid syntax and read the error message with which Rexx responds. The script provides a handy "statement tester." It also shows how the interpret instruction can be used to dynamically interpret and execute Rexx statements. Here's the script:

```
/* REXX TRY1
/*
      Reads user-input Rexx statements and interprets them.
say "Type: 'exit' to end this program"
start_loop:
  signal on syntax
                                      /* establish error trap
                                                                * /
   do forever
     call charout ,"==> "
                                     /* prompt/read on 1 line
      parse pull expression$
      interpret expression$
                                      /* INTERPRET user's input */
   end
end_start_loop: exit 0
SYNTAX:
    say 'SYNTAX:' errortext(rc) '(error' rc')' /* write error*/
    signal start_loop
                                      /* return to processing
```

Here's a sample interaction with the program:

```
C:\Regina\pgms>regina rexx_try1.rexx
Type: 'exit' to end this program
==> say 3+2
```

```
5
==> if a=3 then
SYNTAX: Incomplete DO/SELECT/IF (error 14)
==> if a=3
SYNTAX: THEN expected (error 18)
==> exit
```

The sample interaction shows that the user starts the program and it prompts him or her to enter a Rexx statement. He or she enters: say 3+2. The interpret instruction evaluates and executes this instruction, so the script displays the result: 5. Next the user enters an invalid if instruction. The interpret instruction runs it, which raises the SYNTAX exception.

In the script, this line enabled the syntax condition trap. The error routine it enables must be labeled SYNTAX: since no other explicit label was specified:

```
signal on syntax /* establish error trap */
```

All the error handler does in this script is write an error message and send control back to a label in the main routine. Here is the code for the exception handler:

```
SYNTAX:
say 'SYNTAX:' errortext(rc) '(error' rc')' /* write error */
signal start_loop /* return to processing */
```

rc is one of Rexx's special variables (others include result and sigl). rc contains the error code associated with the syntax error. The line that displays the error message applies the built-in function errortext to the error code in special variable rc to display the complete text of the syntax error message to the user. (In the cases of ERROR and FAILURE conditions, rc is set to the return code from the failed host command.)

At the end of the SYNTAX error routine, the signal start_loop instruction transfers control back to the main routine. When using signal to enable the error routine, the trap routine must explicitly direct execution back to the main program, if desired. This return of control from the exception routine is not automatic when the trap is invoked by the signal instruction.

Note the sample code transfers control back to a point at which it will reexecute the signal statement that enables the ERROR trap:

```
start_loop:
signal on syntax  /* establish error trap */
```

Whenever a trap is enabled by signal, then processed, it *must* be reenabled again to reestablish it. In other words, processing a trap by signal turns off that trap and the condition must be reenabled if it is to be captured again later. So, typically, the first thing a script does after processing an error condition is reenable that condition by reexecuting the signal statement that set it up.

If we do not reexecute the signal on syntax statement to reenable the error condition, the *default action* for that error condition occurs if the error condition is raised again. The default action is what happens whenever an error condition is *disabled* or has not yet been enabled at all within the script.

A signal on or call on instruction has not been executed to enable the error trap. The default action for a syntax error is for Rexx to write an appropriate error message and stop executing the script.

These are the default actions for all untrapped conditions:

Condition	Default Action
SYNTAX and HALT	Rexx writes an appropriate error message and ends the program.
ERROR, FAILURE, NOVALUE, NOTREADY, LOSTDIGITS	The condition is ignored and the program continues.

You can *dynamically* enable and disable trap routines from your code. To turn a condition on, code signal on or call on. To disable it, use signal off or call off. Here is an example:

```
call on error /* enable ERROR error trap */

/* some code might go here */

call off error /* disable ERROR error trap, accept default action for error */

/* some code might go here */

call on error /* enable ERROR error trap again */
```

You can also code multiple routines to handle a single error condition, then dynamically determine which one will be enabled at any time. This code first enables one error routine, then another:

```
signal on notready name notready_routine_1 /* enable NOTREADY error handler */

/* some code might go here */

signal off notready /* enable a different NOTREADY */
signal on notready name notready_routine_2 /* error handling routine */
```

Of course, *only one* routine should be enabled at any time. If you code statements that try to enable more than one routine, Rexx simply uses the last one enabled. In the following code sequence, Rexx would run the second routine when the SYNTAX error is raised:

```
signal on syntax name routine_1
signal on syntax name routine_2
```

An Improved Program

Let's improve the preceding program to manage all the conditions Rexx can raise for traps. This version uses signal to set traps for all seven conditions. You can enter various expressions to see which the program identifies through its error conditions. Here's the script:

```
/* REXX TRY2:
/*
                                                                * /
                                                                * /
     Reads user-input Rexx statements and interprets them.
say "Type: 'exit' to end this program"
start_loop:
  signal on syntax name syntax_rtn /* establish error traps */
   signal on error name error_rtn
   signal on failure name failure_rtn
   signal on halt
                     name halt_rtn
   signal on notready name notready_rtn
   signal on novalue name novalue_rtn
   signal on lostdigits name lostdigits_rtn
   do forever
     call charout ,"==> "
                                   /* prompt/read on 1 line */
      parse pull expression$
      interpret expression$
                                    /* INTERPRET user's input */
   end
end_start_loop: exit 0
SYNTAX_RTN:
   say 'SYNTAX:' errortext(rc) '(error' rc')'
   signal start_loop
ERROR_RTN:
   say 'ERROR: The comand entered returned an error, rc=' rc
   say 'The command was:' sourceline(sigl)
   signal start_loop
FAILURE_RTN:
   say 'FAILURE: Uninitialized variable or failure in system service'
   signal start_loop
HALT RTN:
   say 'HALT: External interrupt identified and captured'
   signal start_loop
NOTREADY RTN:
   say 'NOTREADY: I/O error occurred'
   signal start_loop
NOVALUE_RTN:
   say 'NOVALUE: Variable was not assigned a value: 'expression$
   signal start_loop
LOSTDIGITS_RTN:
   say 'LOSTDIGITS: arithmetic operation lost significant digits'
   signal start_loop
```

This script operates the same as the simpler version but traps more error conditions. Here's a sample interaction:

```
D:\Regina\pgms>regina rexx_try2.rexx
Type: 'exit' to end this program
==> say 3+4
==> say a
NOVALUE: Variable was not assigned a value: say a
==> a=4
==> sav a
4
                                       /* Á user entered CTRL-C on this line */
==>
HALT: External interrupt identified and captured
                                       /* user incorrectly enters DIR command */
'dri' is not recognized as an internal or external command,
operable program or batch file.
   19 *-* interpret expression$ /* INTERPRET user's input
      +++ RC=1 +++
ERROR: The command entered returned an error, rc = 1
                                            /* INTERPRET user's input
The command was: interpret expression$
```

The interaction shows that the say a instruction was intercepted by the NOVALUE condition, because the variable a had not yet been assigned a value. The blank input line is where the user entered the key combination Control-C. The HALT condition routine caught this and displayed its message.

Lastly, the user tries to enter a Windows dir (list directory) command, but mistypes it as: dri. The Error-condition trap gains control. It displays the value returned by the failed command, its condition code, available in Rexx special variable rc. Rexx also sets the value of special variable sigl whenever transfer of control is effected to an internal subroutine or by raising a condition. sigl is set to the line in the source code where the transfer occurred. It can be used to identify the line that caused the problem by a trap routine. This script uses it as an input to the sourceline built-in function, which then displays the source code of the line that caused the condition to be raised:

```
say 'The command was:' sourceline(sigl)
```

This line in the code resulted in this display output:

```
The command was: interpret expression$ /* INTERPRET user's input */
```

This correctly identifies the interpret instruction as the line in the script from which the condition was raised.

We should note in passing that the sourceline function also has another use. Coding sourceline without any arguments returns the number of lines in the script:

```
script_line_count = sourceline() /* determine number of lines in the script */
```

In this script, the seven signal on statements enable all the trap conditions. These instructions specify the names of the trap routines. If not explicitly named, the routine names default to the name of the condition which they trap. For example, the ERROR condition would require the label ERROR: in the script if the signal on instruction does not specifically name some other error routine.

Each trap routine ends with this statement:

```
signal start_loop
```

The label start_loop occurs before the cascade of signal on instructions, so that after any trap routine executes, the program reenables it. If the script did not do this, then each error condition would be disabled after one execution of its corresponding error routine. The default action would then apply to any error condition that was subsequently raised.

One more word about this sample program: It is somewhat system-dependent. For example, different operating systems handle the Control-C entry in slightly different ways. An entry of Ctrl-C on one system was immediately trapped in the program, while in another, it was necessary to enter Ctrl-C, then press the Enter key. Your operating system may give slightly different results. When trapping error conditions, it is very important to test the script on the system on which it will run.

With this improved version of this script, we have a truly useful program. Use it to interactively test any Rexx statement and also learn about any of Rexx's error conditions by trapping them. The script is a generic Rexx "statement tester and verifier." Its exception handling allows it to display good error messages to the user when a statement does not check out.

Special Variables

In this chapter, we've identified two more special variables, rc and sigl. In the TRL-2 standard, Rexx has but three *special variables* — variables identified by a hardcoded keyword, into which Rexx places information at certain times. This chart summarizes the special variables:

Special Variable	Meaning
rc	The return code from a host command, or a Rexx SYNTAX error code.
sigl	The line number that caused control to jump to a label. This could be set by the transfer of control caused by a trapped condition, or simply by a regular call to an internal routine or invoking an internal function.
result	The string sent back to a calling routine by the return instruction. If return is coded without an operand result is set to uninitialized.

All special variables are uninitialized until an event occurs that sets them. While we won't go into them here, it is probably worth noting that the ANSI-1996 standard adds several more special variables to the language.

signal versus call

So far, our sample code has used the signal instruction. Rexx also permits enabling error conditions through the call instruction. Let's discuss the differences between signal and call.

First, signal applies to all seven error conditions. call does *not* apply to SYNTAX, NOVALUE, and LOSTDIGITS errors. *These are invalid and cannot be coded:*

Second, recall that signal forces an abnormal change in the flow of control. It terminates any do, if, or select instruction in force and unconditionally transfers control to a specified label. call provides for normal invocation of an internal subroutine to handle an error condition. It offers a more "normal" way to implement trap routines through the commonly used subroutine mechanism. Control is automatically transferred from the error routine back to the main program when the return instruction in the trap routine executes (as with any called routine).

There is one wrinkle. The result special variable is not set when returning from a called condition trap; any value coded on the return instruction is ignored.

To illustrate the use of call, here is a script that asks the user to input an invalid operating system command. This raises the ERROR condition and starts the ERROR: routine. The trap routine puts the user into Rexx's interactive debugging mode, from which he or she can enter various diagnostics. When the user turns off the trace, the script continues. Here is the code:

```
/* REXX TRY3:
                                                                * /
/*
/*
      Shows how CALL traps a command ERROR.
      Places user into interactive debugging mode.
say "Type: 'exit' to end this program"
start_loop:
   call on error
                                       /* establish error trap */
   do forever
      call charout , "Enter bad command ==> "
                                                   /* prompt
      parse pull expression$
      interpret expression$
                               /* INTERPRET user's input */
   end
end_start_loop: exit 0
ERROR:
   say 'ERROR: The line entered returned an error, rc=' rc
   say 'ERROR MESSAGE:' errortext(rc)
   say 'ERROR LINE:' sourceline(sigl)
                        /* put user in interactive trace mode */
    say 'Interactive Trace'
   return
```

At the program prompt, the user should enter an operating system (OS) command. For example, under Windows he or she could enter the directory (dir) command:

```
Enter bad command ==> dir
```

This command executes normally. The error condition is raised when the user enters an incorrect operating system command:

```
Enter bad command ==> dri
```

In this case, the user mistyped the command. When the error is raised, the trap routine displays the error message by the built-in function errortext. It also displays the source line that caused the problem by using the sourceline function with the sigl special variable as an input parameter. Finally, it places the user in interactive trace mode through this instruction:

```
trace '?'
```

Once inside the interactive trace, the user could interactively enter whatever statements might be useful to gather information and solve the problem. Since the user entered an invalid command, perhaps he or she would ask the operating system for help by entering:

```
help dir
```

This would execute the Windows help command and display more information about the dir command to the user. Since the trace facility allows entering any valid statement, the user could also enter any other command that he or she believes might be helpful to understand the situation.

When the user finishes with interactive debugging mode, he or she just turns off the interactive trace by issuing this instruction, and the script resumes:

```
trace off
```

This script shows how to identify errors and place users into interactive sessions to fix them. This could be useful during program development or in certain kinds of system administration scripts. The ability to dynamically place the user into an interactive session with the interpreter is a feature unique to Rexx scripting that should only be used with knowledgeable users but that is very powerful where applicable.

Recall that when Rexx encounters a command that is not part of the Rexx language, by default it passes it to the operating system for execution. In this case, the Rexx interpret instruction ultimately passed the OS command the user entered to the operating system for execution. This is how the dir command got sent to Windows for execution.

This sample script is operating-system-dependent because the commands it asks the user to enter are OS-specific. For example, the dir (list directory) command is common to all versions of Windows, while the help dir command is only common to some versions of Windows. Both commands fail under Linux, Unix, BSD, and other operating systems. (Since this script captures failed operating system commands, perhaps that's okay!)

For the sake of completeness, we mention that there a few obsolete operating systems that *always* send back a return code of 0 from all OS commands. Running this program on these systems will not properly trap the error code. This is a defect of those operating systems, not of Rexx or its error handling.

For example, running this program under Windows 98SE failed to trap the error and instead just reflected back the OS error message:

```
Enter bad command ==> dri
Bad command or file name
Enter bad command ==> exit
D:\Regina\pgms> _
```

Modern Windows versions have long since corrected this behavior.

The condition Function

The built-in condition function offers a trap routine another means of obtaining information about the circumstances under which it was invoked. condition takes a single input argument, which may be any of the following:

Condition Argument	Full Name	Meaning
С	Condition name	Returns the name of the trapped condition (e.g., ERROR, FAILURE, HALT, NOVALUE, NOTREADY, SYNTAX, or LOSTDIGITS)
D	Description	A system-dependent description or reason for the condition
I	Instruction	Returns either CALL or SIGNAL to tell how the condition was trapped
S	State	The current state of the trapped condition (not the state at the time when the condition was trapped). May be one of the following: ON — the condition is enabled OFF — the condition is disabled DELAYED — any new occurrence of the condition will be delayed (ignored)

What if an error condition is executing and the same condition is raised again? This is the purpose of the DELAYED state. This state prevents a second trap from being invoked while an error-condition routine is executing.

A Generic Error-Trap Routine

To this point, we have discussed error trapping by progressively refining a single program. The program gives users the ability to discover error numbers and messages for various Rexx errors by interactively submitting error-prone statements to the script. One version of the script, in the earlier section entitled "An Improved Program," trapped all seven ANSI-1996 standard error conditions. Each condition was handled by its own separate trap routine.

Now, here's a twist. This sample script also handles the seven ANSI-1996 standard error conditions. But this program sends all errors to a single, consolidated, generic error-handling routine. The trap routine obtains orientation information about the error that occurred through the condition function by issuing that function with various parameters. Here is the code for the script:

```
/* REXX TRY4:
/*
                                                              * /
/*
     Shows how to use the CONDITION function to get
                                                              * /
     information in the trap routine.
say "Type: 'exit' to end this program"
start_loop:
  signal on syntax name who_am_i /* establish all raised */
  signal on error name who_am_i /* conditions to the
  signal on failure name who_am_i /* same trap routine
                                                              * /
  signal on halt name who_am_i
  signal on notready name who_am_i
  signal on novalue name who_am_i
  signal on lostdigits name who_am_i
  do forever
     call charout , "==> "
                                  /* prompt for user input
     parse pull expression$
     interpret expression$
                                   /* INTERPRET user's input */
end_start_loop: exit 0
WHO_AM_I:
   say 'Name of trapped condition: 'condition('C')
   say 'Description:' condition('D')
   say 'Method of invocation:' condition('I')
   say 'Current state of the trapped condition:' condition('S')
   signal start_loop
```

The trap routine named WHO_AM_I invokes the condition function several times to learn information about its environment and invocation. Here is sample output for this script:

```
C:\Regina\pgms\regina rexx_try4.rexx
Type: 'exit' to end this program
==> hi
Name of trapped condition: NOVALUE
Description: HI
Method of invocation: SIGNAL
```

```
Current state of the trapped condition: OFF

==> if a=b then
Name of trapped condition: SYNTAX

Description: Error 14.3: THEN requires a following instruction
Method of invocation: SIGNAL

Current state of the trapped condition: OFF

==> exit
```

This script highlights a basic design decision when trapping errors. Do you write one trap routine to handle all conditions, as in this script, or should you trap each error separately, as in the previous examples in this chapter?

What determines your approach is likely how much you care about error trapping in the program and how specific you want the code to be for each error condition. If generic error handling is acceptable, one routine to manage all errors will be suitable and faster to develop. If the program needs very specific, tight control of errors, then taking the time to write a separate routine for each anticipated condition is probably justified. The trade-off is between the specificity of the error routines and the time and effort required to develop them.

Some sites adopt sitewide standards for error handling. These sites supply a common error routine you invoke from your code to manage errors. Sitewide standards promote standardized exception handling and also reduce the workload because each programmer does not have to define and code his or her own error routines.

Limitations

There are two downsides to error trapping in Rexx. First, there are seven error conditions but no provision to add or define more yourself. Unlike some programming languages, ANSI-standard Rexx does not provide a generalized mechanism by which you can define and raise your own error conditions. Second, standard Rexx offers no way to explicitly raise conditions. All conditions are only raised by the interpreter when the specific condition events occur.

To handle conditions outside the scope of the seven Rexx provides you'll have to write code to identify and invoke them yourself.

How is this done? It depends on the errors you wish to trap, but the general technique is for the script to simply check status after attempting a task. For example, say you wish to manage error codes from a relational database or SQL calls. Simply check the return code and status from these calls in your program, and invoke the internal routine you've written to manage specific return codes. Other interfaces can be controlled in much the same manner. Check the return code from any call to the interface; then manage errors through an error-handler in your script. Chapters 15 through 18 explore interface programming and error handling for interfaces in detail.

A few Rexx interpreters go beyond the TRL-2 and ANSI-1996 standards to support enhanced error handling within the interpreter. Reginald Rexx, described in Chapter 23, allows developers to define their own error conditions and manually raise them if desired. Open Object Rexx also provides enhanced error-trapping features. Chapters 27 and 28 describe Open Object Rexx.

Summary

This chapter discussed the basic mechanism through which special errors or exceptions are captured and addressed. Standard Rexx supports seven error conditions, two of which are specifically oriented toward handling host command errors.

Error conditions are enabled by either the signal or call instructions. Error routines can be given unique names or coded under the default name of each error condition. If appropriate, be sure to reenable a condition once it has been raised and its error routine executed.

Depending on how concerned you are with trapping and addressing errors, you may take the simpler, more generic approach, and handle all errors from within one error routine, or you may wish to write a detailed routine for each condition.

This chapter provides several generic error-handling routines. You can take them and adapt them to your own needs. We progressively evolved the sample script to give a good idea of the different ways in which exceptions can be handled. Two of the scripts took diametrically opposed approaches to enabling and trapping all seven kinds of error conditions. One coded a separate routine for each exception, while the other coded one generic routine to handle all error conditions. Take these examples as a starting point in determining which approach works best for your own projects.

Test Your Understanding

- **1.** What is the purpose of error trapping? What are the seven kinds of condition traps, and what error does each manage? Which error condition was added by the ANSI-1996 standard?
- **2.** How do you capture an external interrupt from within a script?
- **3.** What are the differences between signal on and call on? Are their conditions for which call is invalid?
- **4.** What instruction is used to dynamically evaluate and run expressions?
- **5.** How do you enable an error condition? Can you have multiple error routines to handle the same error condition in the same program?
- **6.** What should you always do after executing an error-condition routine?
- **7.** Is it better to write one generic error routine to handle all errors, or should you write a different routine to manage each kind of error?

The External Data Queue, or "Stack"

Overview

Most Rexx interpreters support an in-memory data structure called the *external data queue*, or *stack*. It is a general-purpose mechanism for passing data — between routines, programs, scripts and the operating system, and other entities.

A number of instructions and built-in functions manipulate the stack: pull, parse pull, push, queue and the queued built-in function. This chapter covers those instructions.

The stack evolved from Rexx's mainframe origins. Mainframe operating systems supported the stack as an integral feature of the environment, so it was only natural that Rexx support this key operating system feature. If you use mainframe Rexx you employ the stack to send commands to the operating system, to retrieve the results from those commands, for interprogram communication, and for other purposes.

Few operating systems other than those on mainframes support a stack. Rexx interpreters, therefore, come with their own "stack service" that mimics how Rexx operates with the mainframe stack.

Depending on your operating system and your Rexx interpreter, you may or may not end up using the stack. Nevertheless, it is important to know about it for several reasons. First, much Rexx documentation mentions the stack. If you don't know about it or understand it, understanding Rexx documentation becomes difficult. Second, the stack is a built-in feature of Rexx interpreters that has some good uses. For example, it's pretty common to use the stack as a vehicle to send input to operating systems commands and retrieve their output.

This chapter provides the necessary introduction to the stack that developers on all platforms require.

What Is the Stack?

The stack is sometimes called the *external data queue*, but we follow common usage and refer to it as *the stack*. It is a block of memory that is logically external to Rexx. Instructions like push and queue place data into the stack, and instructions like pull and parse pull extract data from it. The queued built-in function reports how many items are in the stack.

The stack is a general-purpose mechanism. The manner in which it is implemented within any particular Rexx interpreter varies. Different Rexx interpreters support the stack by different internal mechanisms. The goal is to support a stack that mimics that of mainframe Rexx, as defined in the various Rexx standards.

Computer scientists define a stack as a particular kind of data structure, diagrammed in Figure 11-1.




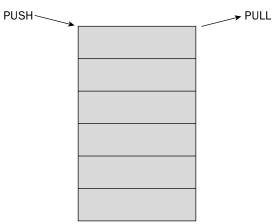


Figure 11-1

The *push* operation places data onto the stack; the *pull* operation removes data from the stack. The most-recently pushed data is retrieved first by the pull operation. Therefore, data that was most recently placed on the stack is retrieved first. This is referred to as a *last-in*, *first-out* (or *LIFO*) data structure because of the order in which data is stored and retrieved.


Computer scientists define the data structure called a *queue* in a similar manner. As visualized in Figure 11-2, the *queue* operation puts data into the queue, and the *pull* operation removes it. The oldest data in the queue is removed first, so a queue structure is a *first-in*, *first-out* (or *FIFO*) mechanism.

Queue: a First-In-First-Out data structure

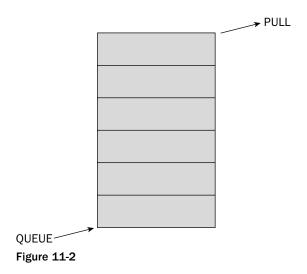

What we call "the stack" in Rexx actually functions as *either* a stack or a queue. Figure 11-3 shows that data is placed into the Rexx stack by either push or queue operations (by the push and queue instructions, respectively). Then the pull or parse pull instructions retrieve data from the Rexx stack.

The Rexx "Stack" is both a Stack and a Queue

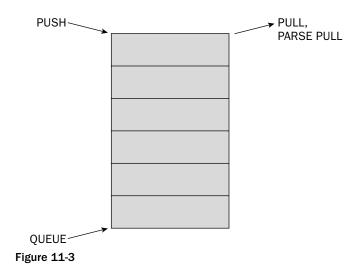

Whether the Rexx stack functions as a stack or queue data structure is dictated simply by whether one uses the push or queue instruction to place data into the stack. (Of course, you can intermix push and queue instructions, but then it's up to you to keep track of how you've placed data on the stack.) The Rexx stack can be used either as a stack or queue data structure (or both), depending on the instructions you use to manipulate it.

The data in the stack is always manipulated in terms of character strings. push or queue instructions place a string in the stack, and pull or parse pull retrieves that character string from the stack. The strings are typically referred to as *lines*. Place a line onto the stack; retrieve a line of data later. Stack access and retrieval is strictly *line-oriented*. There is no concept of "character-oriented" stack I/O.

The size of the stack is implementation-dependent. Many Rexx interpreters allow the stack to grow to the size of available memory. The stack is always implemented as an in-memory facility.

An Example — Placing Data into the Stack and Retrieving It

This first sample script was tested under Regina Rexx, which comes with its own built-in stack. But the program will work with almost any Rexx interpreter, because most come with built-in stack facilities. This sample script places three lines of data into the stack and retrieves and displays them in LIFO order. Then it places three lines into the stack and retrieves and displays them in FIFO order. The program illustrates how to populate the stack and retrieve lines from it, as well as how to use the stack in its role as either a stack or queue data structure.

Here is sample program output. It shows that the first three lines of data placed in the stack were retrieved in LIFO, or reverse order. Then three more lines were placed into the stack. These were retrieved and displayed in FIFO order.

```
C:\Regina\hf>regina stack.rexx
STACK: LINE #3
STACK: LINE #2
STACK: LINE #1
QUEUE: LINE #1
QUEUE: LINE #2
QUEUE: LINE #2
QUEUE: LINE #3
```

Here is the script:

The first do loop in the program places three lines of data onto the stack. It uses the push instruction to do this. We number the lines so that when they are retrieved in *the*LIFO order their order is apparent. Items placed into the stack by the push instruction are retrieved in LIFO order:

The next code block shows the use of the queued built-in function to discover the number of lines on the stack, as well as a loop to retrieve all the lines from the stack:

Since the three items were placed on the stack via push, they are retrieved in LIFO order. Their retrieval and display on the user's screen appear like this:

```
STACK: LINE #3
STACK: LINE #2
STACK: LINE #1
```

After this do group, the three lines placed into the stack have all been removed. If we were to test queued() at this point, it would return a value of 0.

The next do group uses the queue instruction to place three new lines into the stack. These three lines will be retrieved in FIFO order, because the queue instruction placed them onto the stack:

```
do j=1 to 3 $\rm | queue 'Queue: line #' || j $\rm /* queue 3 lines onto the stack */ end
```

This retrieval do group shows a better way of retrieving lines from the stack. It uses the queued function to determine how many items are in the stack, and the interpreter only needs to resolve this value one time. At the end of the loop, the stack is again empty. queued() would return 0 if run again at that time:

Since the three lines were placed on the stack by the queue instruction, they are retrieved and displayed in FIFO order:

```
QUEUE: LINE #1
QUEUE: LINE #2
QUEUE: LINE #3
```

Thus the mechanism in Rexx we refer to as the stack really functions as either a queue or a stack data structure, depending on which instructions are used to place data into it.

At this point you are likely to have a key question—aren't pull and parse pull used to get data from standard input (the keyboard)? How does Rexx know whether these two instructions should retrieve data from the keyboard or from the stack?

The rule is this — pull and parse pull will retrieve data from the stack, if there is any data in the stack. If there is no data in the stack, then these two instructions retrieve data from standard input (or the specified input stream).

The stack is thus the priority input for these two instructions. But for any script that does not place data into the stack, the stack is empty and it is essentially ignored. In this case (which is what you see most often), the pull and parse pull instructions get their data from an input stream in the standard manner.

Say we coded this:

We've placed *three* lines onto the stack, but the retrieval loop tries to pull *four* lines. What happens? Rexx reads and displays the three lines from the stack. Now there are no lines on the stack. So the fourth pull instruction reads from its default input stream, the keyboard. In other words, after displaying the three lines in the stack on the display screen, this script suddenly falls silent and waits for the user to input one line from the keyboard. Assuming that the user enters a line, the script then immediately displays it back to the user by the say instruction that follows the pull instruction in the last iteration of the do loop.

If you use the stack you need to be cognizant of this behavior. Address it simply by understanding how many lines you have on the stack at all times. Use the queued function to manage this, because it tells you how many lines are on the stack.

If you do not use the stack, your scripts retrieve data from the input stream (standard or specified) as they always do through the pull and parse pull instructions. Unless the program places lines into the stack, you can generally pretend it doesn't exist.

If you have lines in the stack but want specifically to read the next line from default standard input, use the instruction parse linein parse linein is a short form of:

```
parse value linein() with [template]
```

Use this statement only if you have lines in the stack and want specifically to avoid them and read from standard input. If there is no standard input to read (for example, from the keyboard), this instruction pauses until a line is input.

Another Example — The Stack for Interroutine Communication

The stack has several common uses. Here we see another one. This sample script uses the stack to pass data to an internal routine. It allows passing a variable number of parameters to the internal routine without worrying about how many there are or having to name them on the procedure expose instruction. Here is the code:

```
STACK PARMS:
                                                                     * /
      This program shows how pass an arbitrary list of parameters
      to an internal subroutine by using the stack.
number_of_parms = 5
                                   /* define number of parms to pass */
do j=1 to number_of_parms
  queue 'Parm: line #' || j
                                 /* queue the parms onto the stack */
call get_parms number_of_parms
exit 0
get_parms: procedure
                                 /* no variables need be EXPOSE'd
                                                                     */
   do j = 1 to arg(1)
                                   /* retrieve and display all the
     parse pull line
                                  /* input parms passed in via
                                   /* the stack
     say line
   end
   return
```

In this script, the driver simply queues several lines of input parameters in the stack. The use of queue is important — this ensures that parameters will be retrieved in the proper order by the subroutine. Using push would create a FIFO structure, in which the parse pull instruction in the subroutine would retrieve the input parameters in the reverse order by which they were placed in the stack — probably not what is intended.

The subroutine uses the arg(1) built-in function to control the do loop which retrieves and displays all the input parameters. Recall that arg(1) retrieves the value of the first argument to the internal subroutine. In this case, this value will be that in the variable number_of_parms, which is 5.

Output from this script shows that the passing and retrieval of the parameters between the two routines and looks like this:

```
C:\Regina\hf>regina stack_parms.rexx
Parm: line #1
Parm: line #2
Parm: line #3
Parm: line #4
Parm: line #5
```

Practical Use of the Stack

As mentioned earlier, Rexx has a stack because this was a feature of the mainframe operating system under which it was first developed, VM (also referred to as CMS or VM/CMS). The goal was to take advantage of the operating system's stack as a feature of the Rexx language.

Unfortunately, few operating systems beyond those on the mainframe support a stack. The upshot is that a platform-dependency worked its way into the Rexx language definition. How does Rexx support a stack when running on operating systems that do not offer one?

The developers of Rexx interpreters have several choices:

- ☐ Add a stack facility to the operating system
- ☐ Create a stack "service" or "daemon" to provide this feature
- □ Build the stack into the interpreter itself

The first two approaches have the advantage that the stack becomes a more generic feature with expanded features. It could be used, for example, for communication between two programs (in a manner similar to how *piping* is used on many operating systems). But the downside is that the Rexx interpreter has to include and be distributed with an external component.

The last approach, building a stack into the interpreter itself, is simpler and more self-contained but provides more limited functionality. For example, even two Rexx scripts run by the same interpreter could not use the stack to communicate between them, because running under two invocations of the interpreter means that they each have their own stacks.


The ANSI-1996 standard does not resolve these internal complexities. It refers to the use of the stack as an I/O mechanism for commands through the address instruction as an allowable extension rather than as an integral part of the standard.

Mainframe Rexx includes commands, instructions, and functions to manipulate the stack beyond the Rexx standards. For example, you can create your own memory area (or *buffer*) to provide a "private stack" for the use of your scripts. Buffers are created by the makebuf command, and eliminated by the dropbuf and desbuf commands. The qbuf function tells how many buffers are in the stack.

There is even the ability to work with more than one stack. Commands such as newstack create another stack, while delstack deletes a stack, and qstack returns the number of stacks in use. When using multiple stacks, the idea is that, at any one time, one stack called the *current stack* will be used.

Figure 11-4 diagrams the relationships between buffers and stacks. Each stack can contain a number of buffers, and each buffer can contain a number of lines.



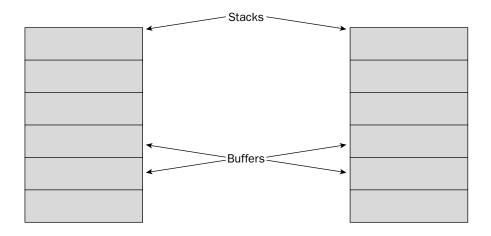

Each Stack can contain multiple Buffers, and each Buffer can contain multiple lines.

Figure 11-4

In mainframe Rexx, the stack is a critical communication area through which commands are passed to the operating system for execution, and through which the results of those commands are read by the script. Chapter 29 on mainframe Rexx explores this in further detail.

Most free and open-source Rexx implementations include extensions that mimic the mainframe Rexx stack features. Regina, for example, includes VM-like built-in functions to create a new stack buffer (makebuf), remove a buffer from the stack (dropbuf), and remove all strings and buffers from the stack (desbuf). Most Rexx implementations simulate IBM mainframe Rexx in that they allow the sending of commands to the operating system and the retrieving of the results of those commands via the stack. These extensions to standard Rexx offer greater capability in using the stack at the possible price of less standardization and reduced code portability. The chapters in Section II on the various Rexx interpreters describe the stack-handling features of the different interpreters.

Some Rexx interpreters on some platforms permit the stack to be used as an interprocess communication vehicle. In other words, multiple, separate processes on one machine use the stack to communicate among themselves. This is rather like the manner in which pipes or sockets can be used for communication between different processes on the same machine. Examples of Rexx interpreters that support this are Regina and VM mainframe Rexx.

Some Rexx interpreters go so far as to allow the stack to be used for communication between different processes on different machines. Regina is one example. Its rxqueue executable and rxqueue built-in function support this feature. The stack thus becomes a generic, machine-independent vehicle for interprocess communications. It can even be used for communications between different processes across the Internet. See the documentation for your specific Rexx interpreter to determine what uses it supports for interprocess communication using the stack or its stack service.

Summary

This chapter explains the role and function of the stack within Rexx. It shows how the stack could be used as if it were either of two different in-memory data structures: a stack or queue. Stacks are LIFO data structures. The last-in data is the first retrieved. Queues are FIFO data structures, where the first item put in the queue is also the first item retrieved.

We covered the instructions and built-in functions that place data on the stack and retrieve it from the stack. These include the push, queue, and pull instructions, and also the queued function. Two sample programs illustrated use of the stack. The first merely demonstrated how items are placed on the stack and retrieved from it, while the other showed how the stack could be used to pass an arbitrary list of parameters to an internal subroutine.

Finally, we discussed how and why the stack came to be part of Rexx. We mentioned that some Rexx interpreters on some platforms permit multiple processes on the same machine to access the same stack, while others even support using the stack for communications across different machines. These advanced facilities are interpreter-dependent and platform-dependent, so check your documentation to see what features are available to you.

The goal of this chapter is to arm you with the background you need so that when you encounter documentation referring to the stack, or a Rexx implementation that relies on the stack, you'll know what you need to be functional.

Test Your Understanding

- **1.** Do all Rexx implementations have a stack? Look in your specific documentation. How does your interpreter implement the stack?
- **2.** What's the difference between the stack and queue data structures? How do you use the Rexx stack to mimic the behaviors of both? What is the role of the queued function?
- **3.** How much information can you place into the stack?
- **4.** Should you use the stack if your goal is to develop code that can be ported across platforms?
- **5.** Can you have more than one stack? What are buffers, and how do you create and destroy them?

Rexx with Style

Overview

One of the primary advantages to Rexx is its ease of use. This leads to programs that are easier to read, enhance, and maintain. But as with any programming language, whether these benefits are truly attained depends on how scripts are written. Developers who design and build clear programs create work that has a longer life; those who develop cryptic or overly clever programs create scripts that will prove less useful after they change jobs. For this reason, we've offered recommendations throughout this book regarding Rexx best coding practices.

This chapter consolidates guidelines for writing clear, maintainable Rexx scripts. While some of the rules of thumb it offers might be considered personal preferences, there is value in attempting to list some of the techniques that lead to the most useful code having the greatest longevity. Figure 12-1 lists some of the techniques we'll discuss in this chapter.

Sometimes developers downplay readable style because it does not appeal to their desire to create "clever" programs. But good programming style is important even to the best developers. It directly affects the reliability of one's code and how many mistakes are made in developing and enhancing that code. This should convince even the advanced, hard-core developer of its value.

Readers are urged to consider how they might write Rexx in the most readable style possible. Whatever approach one adopts, consistency is a virtue. A program that passes variables between routines in a consistent manner, for example, is relatively easy to understand and change compared to a program that uses different means to communicate between different routines. From this comes the first rule of thumb for large programs — whatever stylistic or readability conventions you adopt, apply them throughout and your program will prove much easier for others to enhance and maintain. With this said, here are suggested points of style for good Rexx programming:

Etcetera! Error checking Structured Code Modularity Comments Limit Nesting Spacing & indentation Good variable names

The Steps to Good Programming Style

Figure 12-1

Capitalize on Capitalization

Capitalization

The data that Rexx scripts manipulate is *case-sensitive*. As are the literal strings you code within your Rexx program. A literal string such as This is mine differs from the string THIS IS MINE.

But the Rexx language itself – its instructions and functions — are *case-insensitive*. You can code the <code>if</code> instruction as <code>if</code> or <code>If</code>. It's all the same to Rexx. This gives programmers the flexibility to use capitalization as a tool for clarity. Perhaps the most readable style capitalizes Rexx instructions and leaves everything else in lowercase. Here's a sample code snippet that embodies this style. Notice how it leverages capitalization as a vehicle for greater readability:

```
IF social_security_payments > maximum_yearly_contribution THEN DO
   payments = 'completed'
   stop_payments = 'YES'
   END
ELSE DO
   call payment_routine
   stop_payments = 'NO'
END
```

It's not unusual to see older or mainframe scripts in all uppercase. This harkens back to the days when all coding was uppercase (as in COBOL coding on green-bar paper) and does not take full advantage of Rexx's case-flexibility to enhance readability:

```
IF SOCIAL_SECURITY_PAYMENTS > MAXIMUM_YEARLY_CONTRIBUTION THEN DO
    PAYMENTS = 'COMPLETED'
    STOP_PAYMENTS = 'YES'
    END

ELSE DO
    CALL PAYMENT_ROUTINE
    STOP_PAYMENTS = 'NO'
END
```

Scripting in all lowercase is often popular with those from Linux, Unix, or BSD backgrounds. The author confesses to an all-lowercase preference (probably the result of too much C/C++ programming in his squandered youth).

Good Variable Naming

In Rexx (or almost any programming language), taking advantage of long variable names allows the use of much more meaningful descriptors. The preceding sample if statement uses nice long variable names. This is far superior to cryptic abbreviations, such as those in this version of the same code:

```
IF ssp > mx_yrly_cntrb THEN DO
  p = 'completed'
  stp_p = 'YES'
  END
ELSE DO
  call pymnt_routine
  stp_p = 'NO'
END
```

In this example, the variable maximum_yearly_contribution is abbreviated as the much-less-memorable variable name, mx_yrly_cntrb. Imagine the confusion as one misremembers this abbreviated variable name as max_yrly_cntrb or mistypes it as mx_yrly_contrib. While it is easy to overlook the value of full variable names when coding, during maintenance, enhancements or other activities the value of good variable names becomes evident.

Most Rexx programmers string portions of the variable names together with the underscore character. But this is not required. Sometimes you'll see scripts written by Visual Basic or Java programmers, or those from other object-oriented programming backgrounds, that mix case in their variable names:

```
SocialSecurityPayments
```

This variable-naming style is sometimes called *upper camel case* or just *camel case*. Another style you might encounter strings together capitalized words with underscores to create full variable names. Here is an example of this style:

```
Social_Security_Payments
```

For some, the use of capitals without intervening underscores (SocialSecurityPayments) leads to more typing errors due to the need to toggle the "shift" key while typing the variable name. But any of these naming conventions works fine, so long as it is applied consistently throughout the program.

Even though Rexx does not require declaring variables, it can often be useful to do so. For example, in a large program, defining variable names and their initial values provides useful documentation. With good spacing, it's readable as well:

```
auto_list. = ''  /* list of cars to process */
auto_to_find = ''  /* car to locate for query */
total_queries = 0  /* queries per cookie */
debug_flag = 'OFF'  /* turn ON if debugging */
```

Predefining variables in this fashion is also useful in that you can also use the signal on novalue condition to trap the use of any variable that has not been initialized.

In large programs using global variables, some developers like to distinguish their global variables from those local to individual routines by prefacing them with a common stem. This is yet another use for compound variables. Here is a sample code snippet from a operating system utility written in Rexx that shows how global variables have been uniquely identified by a common stem:

The use of the stem global. makes it easy to spot any global variables within the script.

Use Spacing and Indentation

The preceding sample if statement makes obvious a fundamental principle of program readability: *Make indentation parallel the logic of the program*. Remember the rule that an else keyword pairs with the nearest unmatched if instruction? Indentation that follows this rule makes the logic obvious to anyone reading the program. But indentation that violates program logic makes it much harder to read (and safely update) scripts.

Here's an example. To Rexx, this is the same if instruction as the one encoded earlier. But to a human this is clearly inferior to the original:

```
IF social_security_payments > maximum_yearly_contribution THEN DO
payments = 'completed'; stop_payments = 'YES'
END; ELSE DO
call payment_routine ; stop_payments = 'NO'
END
```

As well as indentation, spacing is another tool for enhancing readability. This line is generously spaced and easily read:

```
if (answer = 'YES' | answer = 'Y') then
```

Change the spacing in this statement, and it becomes less easy to decifer:

```
if (answer='YES'|answer='Y') then
```

Take advantage of Rexx's *free format* nature to add extra spaces in your code wherever it might render the code more readable.

Remember that the one place Rexx will *not* allow a space is immediately after a function and before the parentheses that follow it. This is correct:

```
feedback = function_name(argument1, argument2)
```

But this incorrect coding means that Rexx will not recognize the function:

```
feedback = function_name (argument1, argument2) /* Invalid ! */
```

The function function_name must immediately be followed by the left parenthesis. The set of parentheses contain its argument(s). If there are no function arguments, just code an empty set of parentheses, like this:

Another aspect of readability is how statements are continued across lines. Place the line continuation character, the comma (,), at a natural breakpoint between phrases in a statement to enhance readability. This example:

```
address environment command WITH INPUT STREAM filename_1 ,
OUTPUT STREAM filename_2 ,
ERROR STREAM filename_3
```

reads easier than this:

```
address environment command WITH INPUT STREAM, filename_1 OUTPUT STREAM filename_2 ERROR, STREAM filename 3
```

Both work fine as far as Rexx is concerned. Placing a few spaces prior to the comma increases its visibility. Vertical alignment works wonders in enhancing readability.

Rexx permits coding more than one statement per line by encoding the *line separation character*, the semi-colon (;). Generally, putting more than one statement per line is not recommended. It makes code denser and therefore harder to read. But there are two situations in which this might make sense:

- ☐ Initializing variables
- ☐ Initial assignment of values to array variables

Consistent vertical spacing makes multiple statements per line much more readable. For example, in Chapter 4 this code initialized several array elements in the sample script named Find Book:

```
keyword.1 = 'earth' ; keyword.2 = 'computers'
keyword.3 = 'life' ; keyword.4 = 'environment'
```

This is preferable to jamming as many statements as possible on each line:

```
keyword.1='earth'; keyword.2='computers'; keyword.3='life'; keyword.4='environment'
```

More than one statement per line can be readable only if done in the proper circumstances and with appropriate spacing.

Limit Nesting

Like most expression-based languages, Rexx allows you to nest expressions to almost any depth. This provides great flexibility, but in practice, once expressions become too nested, they become unintelligible to anyone other than their original author. (And even the original developer will have trouble decoding his or her complex statements when maintaining the program after an absence!).

Functions often form part of expressions, because they can return a result string right into the point in the expression in which they are coded. Nesting functions too deeply is tempting to many programmers. It's fun and it's clever. But ultimately the downside of difficult maintenance outweighs this personal value. Unless you *know* no one will ever have to enhance or change your script, it's a real disservice to the next developer to stick him or her with code made more complex by dense expressions or deeply nested functions.

The way to clarity, of course, is to simplify. Break up that complex expression to a series of simpler ones. Break apart deeply nested functions into a series of simpler statements. It makes the code a bit longer, but much more readable.

Here's an example. Remember the rindex program from Chapter 8? This function found the rightmost occurrence of a search byte within a given string. Here is the code for that function:

```
RINDEX:
                                                                     * /
/*
       Returns the rightmost position of a byte within a string.
rindex: procedure expose search_byte
parse arg string
                                                  /* read the string */
say string search_byte
                                     /* show recursive trace for fun */
string_length = length(string)
                                  /* determine string length
string_length_1 = length(string) -1 /* determined string length - 1 */
if string == ''
                        /* here's the 'end recursion' condition
                                                                     * /
  then return 0
else do
  if substr(string,string_length,1) == search_byte then
     return string_length
     new_string_to_search = substr(string,1,string_length_1)
   return rindex(new_string_to_search)
end
```

This version of the same function eliminates the statements that determine the string length and the length of the string minus 1. It takes out these two statements and instead nests these expressions within the body of the code:

```
string_length = length(string) /* determine string length */
string_length_1 = length(string) -1 /* determined string length - 1 */
```

Here's the same function with more nesting:

```
RINDEX:
/*
                                                                      */
/*
       Returns the rightmost position of a byte within a string.
                                                                      * /
rindex: procedure expose search_byte
parse arg string
                                                  /* read the string */
say string search_byte
                                     /* show recursive trace for fun */
if string == ''
                      /* here's the 'end recursion' condition
   then return 0
else do
   if substr(string,length(string),1) == search_byte then
     return length(string)
     new_string_to_search = substr(string,1,(length(string)-1))
   return rindex(new_string_to_search)
```

The code works just as well but is a little harder to decipher. You could nest the functions in this script even further, but nesting is a trend you can get carried away with. It makes for more compact code. But for the benefit of reducing the length of this function by a few lines of code, the nested functions make this routine tough to understand.

Comment Code

Code comments are English-language explanations interspersed among Rexx statements that provide explanation of the script. They are valuable in describing what a program does and explaining how it does it. While many programmers resist writing comments in their code, without comments the longevity of their code is reduced. For example, a very clever program may look like gibberish without comments that explain its operations.

We've seen several styles for program commentary. Comments "blocks" can look like this:

Or, they can be coded like this, as a single long comment statement:

Individual comments may appear on a line of their own:

```
/* This routine finds the rightmost position of a byte in a string.  */
```

Or they can be *trailing comments*, appearing on the line of code they explain:

```
square = a_number * a_number /* find the square of the number */
```

The main point of comments is: *that you use them!* So many programmers severely minimize program commentary that it compromises the value of what they develop. While their code was obvious to them when they developed it, without some English explanation those who maintain that code in the future are left clueless. Document while you program, or do it after you're done. Just be sure you do it.

For significant industrial programs, we minimally recommend a comment block with this information at the top of the program:

```
Date: 08/06
/* Program: fin_1640
/*
                                                    By: H. Fosdick
/* Purpose:
            Kicks off the nightly batch financial system.
/* Usage: fin_1640
/* Parms: none
/* Inputs: (1) financial scheduler track (2) previous nite txn list
/\star Outputs: none directly, but 3 history files through called subroutines
                                                                             * /
/* Calls: all "fin_" package programs (14 of them, see Nightly Run List)
/* Maintenance: __Date___
                                          _Fix_
                           ____By___
                            HF
/*
                  08/06
                                       Created.
                                                                             * /
/*
                  08/14
                               HF
                                       Updated DB2 error processing
                                                                             * /
                  09/12
                               BC
                                       Added job fin_1601 on abend
```

Every time a programmer changes the code he or she should be sure to add a comment on the change(s) made, to the "Maintenance" section of this comment block.

Each internal or external function or subroutine should also have its own leading comment block. On one hand, assuming that the subroutines are small, this may be no more than a brief statement of purpose for the routine. On the other hand, if subroutines are large, or if they involve complicated interactions with other routines, their documentation should be correspondingly more detailed. In this case, documentation should detail input and output variables, file updates, and other changes the routine makes to the environment.

Good comments carry intelligence. Poor comments do not add to the information already available in the program. Cryptic, codelike comments offer little value. Here are a few favorites, collected verbatim from production programs at IT sites:

```
/* Obvious to the casual observer */
/*yew, move the ting over there */
/* Add to the mess already created! */
/* Do NOT show this code to any manager !! */
/* not sure what this does, but suggest that you don't mess with it */
/* Don/t blame me I didnt write. it I just work here */
/*Think this is bad you should c my java.*/
```

While there is no way to scientifically assess the value of commentary, clearly some comments are more useful than others.

Write Modular Code

Modularity is fundamental to large programming systems that are maintainable and flexible. Monolithic code is almost always difficult to change or improve. Modularity limits the "breakage" that occurs from an incorrect enhancement because each module is small and performs a single, limited task. The unintended consequences or side effects of code changes are minimized.

Modules also lend themselves to easier, more exhaustive testing than monolithic systems. A large program that consists of many small, well-defined routines is almost always a better program going forward than one that has fewer lines of code but less clear-cut interfaces between its larger, more complex modules.

How does one best define modules? Some favor top-down methodologies which progressively refine the functionality of the modules. Others use any of the many automated design tools, such as AllFusion, Oracle Designer, the Information Engineering Facility, IBM's Rationale tools, or others. Automated tools tend to enforce good design discipline and often embed guidelines for optimal program design or best practices.

All internal routines (functions and subroutines) follow the main routine or driver in the source code file. The main routine should be clearly marked as such. The internal routines should optimally appear in the file in the same order in which they are initially referred to by the main routine. Subroutines that are invoked from within subroutines should appear in the source code listing immediately below the subroutine that invokes them. Widely shared subroutines can be collected in their own documented area.

Beyond good modular design, variable scoping across routines is a major area for good program design that affects program reliability.

The best approach is to code the procedure expose instruction at the start of each internal routine. This protects all variables that are not specifically listed from inadvertently being changed by the subroutine. It also ensures that you know exactly which variables each subroutine requires, and documents this list for anyone maintaining the program in the future.

Should you use any global variables? Best practice says no. The risk is not to the programmer who first develops the code, but rather to any who must later maintain or modify it. The risk of breakage or unintended side effects rises exponentially when a large program uses many global variables, especially in languages like Rexx that allow variables to be defined by first use (rather than requiring declarations). This is because the person doing maintenance cannot be sure what variable names have previously been used or where.

If you must use global variables, here are some suggestions:

- Define (declare) all of them in a single block at the top of the code.
- These variable definitions should initialize each variable.
- Precede all global variables with a common stem, such as global.
- Include a comment block to specifically identify this set of global variable declarations.

Another approach is to pass information between all routines by a global stack. Essentially the stack becomes a control block or in-memory *.ini or configuration file that defines behavior and passes information.

However you pass information between routines (procedure expose, input arguments, global variables, or a global stack), be consistent across all routines in the program. Mixing modes in information passing almost guarantees future error during program maintenance. Our best recommendation is to code procedure expose for each internal routine, listing all variables used by that routine.

Write Structured Code

Structured programming requires only one entry point and one exit from any code block. The benefit is increased clarity and easier code enhancement and maintenance. Studies also show that structured coding results in fewer errors. Writing structured, modular code provides a big payback and really helps you script Rexx with style.

Chapter 3 discussed the control constructs used in Rexx for structured programming. Let's review them here. These are the instructions you should use in your code in order to write structured programs:

Structured Control Constructs	
if-then	
if-then-else	
do-end group	
do-while	
do n times	
do initialize-loop-counter to limit by increment	
select	

Structured Control Constructs		
call		
return		
exit		

As a powerful general-purpose programming language, Rexx also supports unstructured control constructs. Their use is not recommended as they fall outside the principles of structured programming. If you use any of the following instructions, as described in the following table, your code is unstructured:

Unstructured Control Constructs			
Instruction	Use Instead		
signal	Used as an unconditional GOTO	if-then-else	
do-until	Bottom-driven loop	do-while	
do forever	Endless loop requiring an unstructured exit	do-while	
iterate By-passes statement(s) within a loop		if-then-else	
leave	Unstructured exit from a loop	if-then-else, do-while	

The column on the right-hand side of this table shows the structured constructs that should be used to replace the unstructured ones on the left side. We recommend that you replace any instances of the unstructured instructions in the leftmost column in your code with their structured equivalents from the right-most column.

Any unstructured control construct can be replaced by a structured one. Any program logic that can be written as unstructured code can also be written in structured form.

Handle Errors

Error-handling code greatly increases the robustness of an application. Scripts that omit the small amount of code it takes to include good error checking are greatly inferior to those that include it.

Identifying and handling common errors allow an application to better adjust to its environment. It saves application users both time and confusion when scripts, at the very least, display a descriptive error message that explains unexpected conditions or failures.

Why don't all scripts check for and handle errors? Quite simply, it is quicker for most developers to program without including such "extraneous" coding. Unfortunately, developers do not often go back and add error checking to their scripts after the initial script is up and working.

The errors that s	cripts should	check for fall into	several	categories.	Here are	the major	categories (of prob-
lems for which y	your scripts sh	nould check and n	nanage:					

Command results
Interpreter-raised error conditions
Return codes from interfaces
I/O results

Chapter 14 goes into how to issue operating system commands and verify that they worked. Scripts can check return codes from the commands and even parse their message outputs for further information. The condition traps for ERROR and FAILURE also capture errant commands.

Remember that there are several other exception conditions scripts can trap, including HALT, NOVALUE, NOTREADY, SYNTAX, and LOSTDIGITS. Chapter 10 covers Rexx's condition-trapping mechanism and how scripts use it to manage errors.

Many scripts interface to external packages, for example, for graphical user interfaces (GUIs) or database storage. Always check the return codes from functions or commands that control external interfaces. A program that fails to recognize an interface error and blithely continues could cause a *hard failure*, a failure that stops an application and leaves no clue as to what happened.

Be sure to check the return string from the stream I/O functions. As listed in Chapter 5, some of these functions and their return strings are:

charin — Returns number of characters read (0 if none were read).
charout — Returns number of characters <i>not</i> successfully written (0 means success).
chars — Returns a nonzero value if characters remain to be read.
linein — Returns a line read from a file, or the null string if no line exists to read.
lineout — Return value varies by requested operation. For writing one line, a return value of means the line was successfully written, 1 means it was not.
lines — Returns a nonzero value if there is at least one line left to be read.

Failure during charin or linein can result in raising the NOTREADY condition if some problem occurs. As shown in Chapter 10, this can be trapped by an appropriate error routine.

And now, a mea culpa. The scripts in this book do not include robust error checking because we limit the size of the scripts for clarity. Including good error handling in all the scripts would be redundant and detract from what the scripts illustrate. If you're coding in the workplace, we urge you not to take the easy way out but to code strong error checking. Industrial-strength programming requires complete error checking and a fail-safe coding approach.

Additional Suggestions

There are many other suggestions to make for producing the most readable, maintainable, error-free code. In the sections that follow, we briefly discuss a few of the more widely accepted. Following these suggestions will make your code much more readable, maintainable, and reliable. Good programming practices are as much a part of the value of scripts as are the algorithms those scripts embody.

Subscripts

For looping control variables, use common subscript names like i, j, and k. These should always be set explicitly at the start of the loop: don't make assumptions about whether a loop control variable has been used previously in the code or what its value is. Also, do not use these subscripts for other purposes. Limit their use to subscripting and use more descriptive variable names for other purposes.

A classic scripting error is to use one of these common variables as a loop control variable, and then assign it another value for another purpose inside the loop! While this may sound like silly mistake to make, it indeed happens in large programs or in situations where many developers maintain a single program. Another classic error is to use the same subscripting variable for an outer loop and for an inner loop nested within the outer loop. This produces "interesting" results in the behavior of the outer loop!

To summarize, our recommendations for loop-control subscripts are:

- Explicitly initialize them at the top of each do loop in which they are used.
- ☐ Do not alter them within the loop (let the do instruction increment them).
- Use your set of subscripting variables only for subscripting.

Quotation marks for commands

Chapter 14 explores in detail how to issue operating system commands from within scripts. That chapter demonstrates how to issue OS commands, how to send them input and retrieve their output, how to recognize and identify commands that fail, and a host of other important related topics. This section summarizes a few rules of thumb for limiting errors in scripts that issue operating system commands or commands to other external interfaces.

Some programmers always enclose the operating system commands within their scripts within quotation marks. This readily identifies where OS commands occur within scripts. Other developers prefer not to enclose operating system commands in quotation marks, unless they must in order to avoid Rexx's evaluation of the expression before passing it to the operating system. This produces readable code because it is less cluttered with quotation marks. Either approach works fine. We recommend consistency with whichever you choose.

Try to avoid double-nesting quotation marks. Especially in mainframe scripting, you'll sometimes see complex nesting of quotation marks that is really not necessary.

It is better to build a command string through several simple statements than to dynamically concatenate a complex command in a single statement. Also, it is easier to debug commands that are built within variables: Simply display the variable's contents to the screen and see if it appears as a valid command.

Here is an example. This statement builds a character string that will be an input argument to a function:

The string concatenated into the variable is syntactically complex. If we want to ensure that it is correct, we could issue a simple say statement to display the value on the screen:

```
say sqlstr /* display string on screen to verify accuracy */
```

Here's the interface command in which this character string is used. You can see that building the command component separately is *way* easier than if we had actually nested it within this statement:

```
if SQLCommand(i1,sqlstr) <> 0 then sqlerr('During insert')
```

To summarize, our recommendations for building commands and function strings are:

- □ Build them in several simple steps, not in one complicated statement.
- ☐ Build them in a variable, which can easily be displayed and verified.
- ☐ Avoid cluttering command statements with superfluous quotation marks.

Consider declaring all variables

Some developers find it clear to define or declare all variables in advance and initialize them at that time. In large programs, it can otherwise be difficult to locate the first use of a variable or tell what it was initialized to.

This code snippet illustrates this principle. Here we assume that we have a very large script, and the declaration of all global variables at the top of the program helps document and explain their use. Separating the global variable definitions from the start of program logic segments the program into more readily understood components. Each variable in the program is initialized to some value, which makes it easy to find the initial setting for any variable:

By splitting out the definition and initialization of all variables prior to the "main routine," the programmer makes the entire program clearer and better modularizes program activity.

Rexx-aware editors

Some editors are Rexx-aware. They highlight elements of the language in different colors and assist in indenting code. Rexx-aware editors make your job easier because they highlight the structure of scripts by color-coding and indentation. We recommend using these editors if you have the opportunity, because they tend to reduce error rates and make coding quicker and easier.

Examples of Rexx-aware editors include:

- ☐ THE (The Hessling Editor) for Linux, Unix, Windows, and other platforms
- ☐ The Rexx Text Editor (or RexxEd), which is distributed along with Reginald Rexx
- ☐ The Interactive System Productivity Facility, or ISPF, on the mainframe
- □ XEDIT on the mainframe

Publish site standards for coding style

Consistency within a program is key to its readability. Consistency across all programs at a site extends this virtue to the code asset owned by the company or organization. Many organizations consider developing, disseminating, and enforcing such standards fundamental to the value of their code base.

The keys to the viability of site coding standards are that they are easily accessed by the developers and that management holds the developers accountable to scripting to the standards. Standards can be made readily accessible by publishing them on a corporate intranet or placing them on a shared local area network drive. Programmers should be able to access the standards in the normal course of their work with little or no extra effort.

Developers can be held accountable to corporate standards by several means. Two of them, automated checking tools and code reviews, are discussed in the following sections.

Consider automated tools to ensure standards compliance

Consider purchasing or developing automated tools to enforce good program documentation and style. Simply promulgating site standards is of little value unless those standards are adhered to. Automated tools are one means to ensure that this happens.

Here is a very simple example of "automation" in the service of standards. One site keeps a set of documentation templates on a shared departmental disk drive. Programmers copy each template, and fill in the blanks to document their applications. This ensures developers provide all the required documentation elements, and at the same time, makes it easier on the developers because they do not have to worry about designing the structure of the documents. By completing what is already provided, programmers both meet the documentation standards and do so with the least effort.

Consider code reviews

In the absence of automated tools, *code reviews* (having one's code looked over by a peer) can be a way of administratively enforcing good programming practice or sitewide programming standards. Several

formal methodologies optimize code reviews, including *structured walk-throughs* and *joint application development* techniques. A quick Web search on either of these terms will give you good beginning information about what they entail.

While many programmers don't care to have their code checked in this manner, code reviews are a proven technique to ensure conformance to site standards and more reliable code. The "egoless programming" promoted by code reviews tends to render applications more maintainable and prolong their life.

Avoid Common Coding Errors

Some of the most common coding errors in any programming language derive from odd or hard-to-remember syntax and coding detail. Fortunately, using Rexx results in fewer errors of this nature than many languages because of its spare, clean style.

Nevertheless, a few coding errors are common among Rexx programmers, especially those new to the language. This brief section lists the more common errors you'll encounter.

Failing to end a comment

Each comment starts with the two characters /*. Be sure to code the corresponding ending characters */. Otherwise, the rest of your script becomes one long comment! Also, the two characters /* and */ must be immediately adjacent one another with no intervening blank.

Failing to end a literal string or parenthetical expression

For each single or double quotation mark, there must be a corresponding end quotation mark. This rule applies to parentheses as well. For each left parenthesis, there must appear a corresponding right parenthesis later in the code.

Improper coding of functions

When invoking functions without the call instruction, the left parenthesis must immediately follow the function name:

```
fd = function_name(argument1, argument2) /* No space prior to first paren ( */
```

Forgetting that functions return a string

A function returns a value. If you code the function as the only item on a line:

```
function_name(argument1) /* nowhere for the result string to go ! */
```

the value it returns has to go somewhere. Where Rexx will send it is to the default command environment. Thus if the function above returns a value of 1, this string will be sent to the operating system for execution!

One solution is to capture the result string in a variable:

```
feedback = function_name(argument1) /* result string goes into FEEDBACK */
```

Another approach is to invoke the function by the call instruction so that the special variable result can capture the result string:

```
call function_name argument1 /* RESULT contains the result string */
```

Using parentheses on call

Do not enclose arguments to the call instruction in parentheses. This statement is incorrect:

Here is the correct way to code this statement:

```
call subroutine argument1, argument2 /* correct */
```

This is an easy mistake to make because when you encode an embedded function you always immediately follow it by parentheses. A call is different in this respect.

Failure to use commas on call or in parse arg

While parentheses are not needed, commas to separate input arguments to a routine are (see the above). Commas must also be coded between the arguments referred to in the parse arg instruction:

```
parse arg argument1 , argument2
```

Confusing command-line arguments with internal routine arguments

As in the preceding example, retrieve arguments passed in to internal routines by using the arg or parse arg instruction and variables separated by commas. Contrast this to *command-line arguments*, which are retrieved into a routine by the same instructions *but without separating commas*:

```
parse cmd_line_arg_1 cmd_line_arg_2 .
```

The arg() function tells how many parameters were passed into an internal routine. It only returns 0 or 1 when applied to command-line arguments.

Global variables

Global variables are convenient when first developing a large program but significantly reduce reliability as that program undergoes enhancements and maintenance. Code procedure expose for each internal function or subroutine.

Forgetting return or exit

Remember to code the return instruction when a subroutine ends to send control back to the caller. Functions *must* return a string to the caller; subroutines may optionally do so. Be sure to encode the exit statement at the end of the main routine and prior to any subroutines and functions that follow it, so that the flow of control does not inadvertently "roll off" the end of the program into the internal routines placed after it.

Forgetting about automatic uppercase conversion

Instructions pull and arg automatically convert input to uppercase. This is convenient but must be kept in mind when later using those strings in comparisons; compare those strings to their uppercase equivalents. If uppercase translation is *not* desired, code parse pull and parse arg instead.

Uppercase translation can be particularly tricky when reading in filenames. Under operating systems like Windows or DOS, filenames are not case-sensitive. However, operating systems like Linux, Unix, and BSD use case-sensitive names. Having the user input these filenames when running under Linux, Unix, or BSD means that your program must use parse arg or pull arg to read them. arg or pull alone translates the filenames to uppercase, which likely produces incorrect filenames.

Another place to remember about automatic uppercase translation by the interpreter is with variable names and values. Rexx uppercases variable names internally, and it will also uppercase character strings that are not enclosed in quotation marks. Several sample scripts in Chapter 4 relied on these facts to work properly.

Incorrectly continuing a statement

Rexx uses the line continuation character, the comma (,), to separate items in a list as well as for line continuation. Rexx interprets this coding:

```
a = \max(1, 3, 5, 7, 9)
as:
a = \max(1, 3, 5, 7, 9)
```

Correct this by recognizing that you need one comma to separate every item in the list as well as an extra comma for line continuation:

```
a = max(1, 3, 5, , 7, 9) /* correct */
```

We suggest surrounding commas with spaces or blanks for enhanced readability.

Failing to use strict comparisons

Remember that in a character string comparison, Rexx ignores leading and/or trailing blanks and blank-pads the shorter item in the comparison as necessary. Use the strict comparison operators like *strictly equals* (==) when strings must be precisely compared on a character-by-character basis, without Rexx making assumptions concerning spaces or padding.

Incorrectly coding strict comparisons for numbers

Strict comparisons make sense only in comparing strings and should not mistakenly be coded when comparing numeric values.

Summary

Good coding style is often a matter of preference. Nevertheless, there are a few rules of thumb that render scripts more readable and maintainable. We've discussed some of the generally accepted ones in this chapter. These include the proper use of capitalization, good variable naming, proper spacing and indentation, extensive code commentary, structuring and modularizing code, and robust error and exception handling.

We also listed a few common coding errors and how to avoid them. Learning to avoid these errors in your coding will quickly reduce the time you spend in debugging and testing your scripts. Some of the most common errors include incorrectly coding the invocation or return from routines and functions, improperly passing or reading arguments or parameters, and failing to terminate comment blocks or encode line continuations.

While many developers style themselves as "heavy-duty techies"—and write obscure code to prove it—the best programmers write the most readable code. Their scripts feature lower error rates, are easier to enhance and maintain, and remain useful longer. We urge readers to take the stylistic concerns highlighted in this chapter to heart and write code that conforms to best practice.

Test Your Understanding

- **1.** What is "the virtue of consistency" when applied to programming practice?
- 2. Why do some programmers deeply nest functions? What is the downside of this practice?
- **3.** What makes a "good" comment in a script? What are the three styles of commenting scripts?
- **4.** What are the basic principles of modularity? Of structured programming?
- **5.** What's wrong with do-until loops and the signal instruction used as a GOTO? With what should you replace these two constructs?
- **6.** What makes a "good" variable name? Why is good variable-naming important?
- **7.** Should you use global variables? Why, or why not?

Writing Portable Rexx

Overview

One of the great advantages to Rexx is that it runs on every available *platform*, or hardware/operating system combination. Rexx scripts run on handheld devices, laptops, PCs, midrange servers of all kinds, all the way up to the largest mainframes.

This book covers the major Rexx interpreters. All are either free or open source or come bundled with an operating system. All support *classic Rexx*, the form of the language standardized by TRL-2 and later by the ANSI-1996 standard. Additionally, there are Open Object Rexx and roo!, true object-oriented supersets of classic Rexx, and NetRexx, a Rexx-like language for developing applications in the Java environment. Figure 13-1 below shows how object-oriented Rexx interpreters and NetRexx evolved from classic Rexx. Beyond these free implementations and variations, there exist several commercial implementations as well.

The Evolution of Rexx

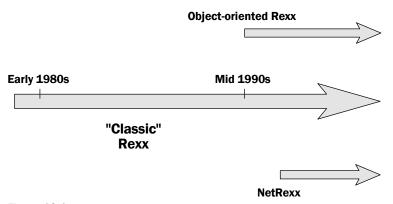


Figure 13-1

Rexx's ubiquity and standardization have two implications. First, this means that your knowledge applies to a broad range of platforms. If you know how to code Rexx scripts on a PC, you can do it on a mainframe. If you program Rexx under Windows, you can do it under Linux, Solaris, VM, or any of dozens of other operating systems. In learning Rexx, you acquire a broadly applicable skill portable across numerous environments.

The second advantage to ubiquity and standardization is *code portability*. For example, a script could be developed under Windows and then run under Unix. Code can be designed to be platform-independent, leading to savings for organizations that support diverse platforms. Different kinds of problems can be addressed by scripts hosted on different platforms. One could develop scripts in one environment and run them in another.

Code portability is not a given. Regardless of language standards, there are still different platform-unique characteristics that intrude upon this goal. This chapter points out some of the factors affecting code portability and how to address them when writing Rexx scripts.

Whether code portability is desirable depends on your goals. In most cases, creating scripts that are compatible across many operating systems, platforms, and Rexx interpreters restricts the use of the language to its standard capabilities. It forgoes the power of language extensions and OS-unique features beyond the Rexx language standards. Writing and testing portable code also typically involves extra effort. This chapter does not argue for code portability — whether portability is desirable depends on your own needs. The purpose here is simply to offer guidance where portability is a goal.

To provide this guidance, the chapter covers several key topics. First, we discuss some of the factors that affect code portability. These orient you as to how easy (or difficult) it may be to achieve portability in different application projects. Next, we discuss the various Rexx standards. Understanding what these standards contain and their slight differences helps you achieve portable scripts because you'll know better what it means to "code to the standard" if you know what the standards define.

After this, we discuss how scripts learn about their environment. This underlies portability. Only the environmentally aware script can act in ways that support its portability. We start by reviewing various functions and features of Rexx that the book has already covered, but this time we view them through a new lense — how can they aid portability? We also introduce new instructions and functions whose main purpose is environmental awareness. Then, we demonstrate some of the principles of portability with a script that intelligently determines the platform and interpreter it runs under. This is the core requirement of a portable application: the ability to query and understand the environment in which it executes.

We conclude the chapter with a more detailed discussion of the techniques and challenges of portable code. This addresses Rexx tools and interfaces, and the manners in which they can enhance (or detract) from portable scripting.

Factors Affecting Portability

Your knowledge of Rexx is widely applicable across platforms because humans have the ability to discern (and allow for) minor differences. Programs, of course, have no such capability unless it is explicitly recognized and coded for.

There are several factors that affect code portability.

First is whether the code stays within the Rexx standards. Code that remains within the ANSI-1996 standard will be most portable. Better yet, code within the slightly more narrow TRL-2 standard definition, since many Rexx implementations were designed for TRL-2 and do not address the minor ANSI-1996 improvements. Later in this chapter we summarize the evolution of Rexx standards and the minor differences between them.

The second factor that affects the portability of Rexx scripts across platforms is whether the developer considers code portability a goal during program design and development. Sometimes it is quite possible to make choices that provide a higher degree of code portability without any extra effort — all that is required is that the developer recognize the nuances of code portability in his or her program and address them up front.

Take, for example, file I/O. Recall that Chapter 5 illustrated both line-oriented and character-oriented I/O. Both are implemented through a set of instructions and functions that are all well within all Rexx standards. Yet scripts making certain assumptions when using character-oriented I/O will be less portable than those using line-oriented I/O (since character I/O reads the line-ending and file-ending characters that vary across operating systems). This is a simple example where code can be made much more portable at the mere price of understanding platform differences.

Perhaps the biggest factor affecting code portability is the degree to which the script issues operating system commands. This is one of the major uses of Rexx, of course, and operating system commands vary by the OS.

Recognize that the OS's under which the script is to run affect how portable that script can be. For example, Windows is a family of like operating systems. It is easier to write a script to run under different versions of Windows and to issue Windows commands than it is to write a script that issues both Windows and Linux commands and runs under both Windows and Linux, for example. Cross-platform portability is always easier when the operating systems involved are similar, such as those within a single operating system family. Portability across all forms of Windows or across all varieties of Linux is easier than achieving portability across Windows and Linux.

The nature of the commands the script issues affect its portability. If you write a script that runs under the three major varieties of Unix (Oracle Solaris, IBM AIX, and HP HP/UX), the higher-level commands are common across these three OSs. By *higher-level*, we mean Unix commands that meet generally accepted Unix System standards. The *lower-level commands* diverge among these three versions of Unix. They become unique and system-dependent. Lower-level commands include, for example, those of the proprietary volume managers used in these three systems. Another example is parameters that configure the Unix kernel.

Foreknowledge of the environments in which a script will run is a key determinant in how much effort it costs to make the code portable. The developer can design and modularize code to address the target operating systems. He or she can isolate OS-specific code to certain places within the program, and avoid literal command strings in favor of building them within variables, for example. Retroactively trying to impose code portability on a working script that was designed without this goal in mind is always more difficult and always costs more.

How many operating system commands a script issues (and how OS-specific those commands are) determine how portable code is and how much effort portability takes. A script that performs a generic task independent of operating system should be highly portable. The scripts in this book provide examples. Up to this chapter, only one executed an operating system command (the Windows cls command to clear the display screen). It was easy to test these scripts under both Windows and Linux. The next chapter goes into more detail about how to issue commands from Rexx scripts to the operating system. Since these scripts are oriented toward issuing OS commands, they are much more bound to the platform for which they were developed and run. The rule of thumb is: generic tasks can be coded to be run anywhere, whereas OS-specific tasks will always present a challenge if code portability is a goal.


Finally, many Rexx programs interface to outside packages, for example, for user interaction through a GUI or data storage via a database management system. The following chapters describe and illustrate some of these interfaces. Interfaces present another portability challenge. Some interfaces are themselves designed to be platform-independent, so they make scripts more portable. Other interfaces are platform-dependent and so render scripts that use them platform-specific. Consider the costs as well as the benefits of any interface before deciding to use it in your scripts.

Rexx Standards

Outside of limiting the operating system commands your script issues and sticking to cross-platform interfaces, the biggest action you can take to develop portable code is to code within the Rexx standards. This section describes these standards in more detail as well as the manner in which they evolved and the differences between them. Understanding the standards and their differences enables you to code for greatest portability.

Figure 13-2 shows the evolution of Rexx and its standards.

Rexx Standards

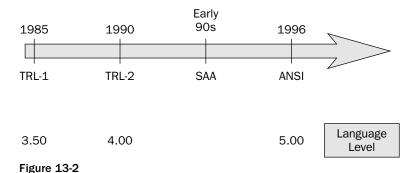

This table summarizes the four Rexx key standards and when each was promulgated:

Standard	Date	Language Level
TRL-1	1985	3.50
TRL-2	1990	4.00
SAA	1992	
ANSI	1996	5.00

Michael Cowlishaw, the inventor of Rexx, wrote his definitive book *The Rexx Language: A Practical Approach to Programming* in 1985. He produced this book after several years of feedback on Rexx from the thousands of users connected to IBM's VNET network (an internal IBM network that presaged the Internet). The result was that the original Rexx language definition embodied in TRL-1 was remarkably complete, mature and stable.

Mr. Cowlishaw issued the second edition to his book, called TRL-2, in 1990. TRL-2 lists the changes it makes over TRL-1 in an appendix. There are 33 changes that take only four pages to describe. Many of the changes are highly specific "minor additions" more than anything else. The major improvements are summarized below.

Major TRL-2 Standard Additions to TRL-1

Input/output — The stream function is added for greater control over I/O, and it and the NOTREADY condition offer greater control over I/O errors.

Condition trapping — In addition to the NOTREADY condition, the condition function provides more information to error routines. The signal and call instructions can refer to named trap routines (previously the names of the trap routines were required to be the same as the name the condition they handled).

Binary strings — Binary strings are added as well as several conversion functions that apply to them: b2x and x2b.

More specific definitions — TRL-2 tightens up the definitions of TRL-1 where necessary, providing a more accurate language definition for interpreter writers. There are also many very small miscellaneous changes.

Rexx interpreters that conform to the language definition of TRL-1 are said to be of *language level* 3.50. Those conforming to TRL-2 are at language level 4.00.

IBM defined and published its *Systems Application Architecture* standard, or *SAA*, in the early 1990s. The goal of SAA was to increase code and skills portability across IBM's diverse operating systems. As part of this effort, IBM identified Rexx as its *common procedures language* across all its operating systems. This had two effects. First, IBM ensured that Rexx was available and came bundled with all its operating systems. This not only included mainframe operating systems in the OS, VM, and VSE families, but also included systems such as IBM i and i5/OS. The second effect of SAA was that IBM converged the features of its Rexx implementations across its platforms. TRL-2 (and its VM/CMS implementation) formed the common base.

An *American National Standards Institute*, or *ANSI*, committee embarked on standardization of Rexx beyond that of TRL-2 in the early 1990s. The committee completed its work in 1996 with the publication of the Rexx standard X3.274-1996. This standard is commonly referred to in Rexx circles as *ANSI-1996*. The ANSI-1996 standard makes only minor language additions to the TRL-2 standard. The primary contributions of the ANSI-1996 standard to Rexx are below. The language level of ANSI-1996 is 5.00.

Major ANSI-1996 Standard Additions to TRL-2

ANSI legitimacy — Confers the prestige and imprimatur of an international standard upon Rexx. ANSI is the main organization for standardization of programming languages.

A few new features — ANSI-1996 adds a few language features where they are nondisruptive to existing scripts and earlier standards. These include, for example, the new built-in string manipulation functions changestr and countstr, and the new trap condition LOSTDIGITS. The date and time functions are enhanced to perform conversions in addition to just reporting the date and time. A few more special variables are added (.rc, .rs, .result, .mn, .sigl).

Data left to read—The chars and lines functions previously returned the number of characters or lines left to read on the input stream. Determining these values could consume much time for large files. ANSI-1996 allows the returning of 1, meaning "some undetermined number of characters or lines are left to read." The lines function has two options: C, which returns the number of lines left to read in the file, and N, which allows a return of 1 for one or more lines left to read and 0 if there are no lines left to read. For backward compatibility, N is the default.

Command I/O — ANSI-1996 more accurately defined how input is sent to commands and how command output and errors are captured. These are reflected in enhancements to the address instruction and address function. The address instruction now includes keywords input, output and error to manage communication to/from the operating system or other external command execution environment. The address function can return the setting of these three new keywords. Chapter 14 illustrates how to use the address instruction and address function.

More precise language definition — Provides a more precise definition of Rexx beyond that provided by TRL-2. TRL-2 defines Rexx in book form, readable by the typical software developer or IT programmer. The ANSI-1996 standard is written in a format designed for those who need the precise definition necessary to create a Rexx interpreter or assess whether a specific interpreter meets international standards. The ANSI-1996 standard is more rigorous than TRL-2 but less readable for the average developer.

Nearly all Rexx implementations meet the TRL-2 standard. Many also either meet the ANSI-1996 standard or are being enhanced to meet it. To rephrase this in terms of the "language level," nearly all Rexx implementations meet or exceed language level 4.00 and some achieve 5.00. The main exceptions to this rule would be those Rexxes that were purposely designed as "language variants," for example, NetRexx. Rexx thus features a strong, well-defined and widely adhered to language standard. Coding to it greatly increases code portability.

All the programs appearing to this point in this book conform to the TRL-2 and ANSI-1996 standards. In the upcoming section of this book on "Rexx Implementations" we cover some of the implementation- and platform-specific aspects of various Rexx interpreters. Subsequent chapters on interfaces to outside packages (like databases, the Tk GUI, XML and the like) also go beyond the Rexx standard, because they are not part of the language.

One big factor in Rexx's success as a widely used scripting language is that it was defined rigorously by a highly readable book, TRL-2, relatively early in its history. Yet this language definition was published after the language had reached a full, stable state. Compared to many programming languages, Rexx was lucky in this regard. The popularity of some programming languages suffers because they become widely implemented before a standard solidifies; other languages quickly gain a standard but this occurs before the language gains all the necessary features. Rexx programmers benefit from this happy history with much more standardized and portable code than many other languages.

The bottom line is that to render your scripts as standardized and as portable as possible, all you need do is code to the TRL-2 and ANSI-1996 standards. This section spells out exactly the differences between the major Rexx standards. Combined with information from your Rexx interpreter's manual, this knowledge makes it much more possible to code portable scripts.

How a Script Learns about Its Environment

We've mentioned a few factors that affect code portability. Underlying this is the script's ability to learn about its environment. To issue operating system commands in a cross-system manner, for example, the script needs to be able to determine under which operating system it runs. The script might also need to know about how it was invoked, the version and language level of Rexx running it, the date and time, and other bits of environmental information. This section addresses this need. First we'll repeat (but consolidate) instructions and functions that provide information to scripts that have been discussed in previous chapters. Then we'll get into new material showing how scripts retrieve environmental information critical to their knowledgeable interaction with their environment in a cross-platform manner.

As covered earlier in Chapter 8, a script learns its input arguments or parameters through these two key instructions:

- ☐ parse arg—Access input parameters (without automatic uppercase translation)
- □ arg Access input parameters (with automatic uppercase translation)

arg is just the "short form" of the instruction:

```
parse upper arg [template]
```

The arg function can:

- ☐ Tell how many input arguments were passed Coded as arg()
- ☐ Tell if the nth argument exists Coded as arg(n, 'E')
- ☐ Return the nth argument (assuming it exists) Coded as arg (n)

A number of built-in functions allow scripts to access environmental information. Scripts that issue these functions without any arguments retrieve environmental information:

Function	Environmental Information Returned	
address	Returns current default command environment, or, returns the current input, output, and error redirections.	
date	Returns the date in any of a variety of formats based on the input parameter.	
digits	Returns numeric precision.	
fuzz	Returns precision for numeric comparisons (the <i>fuzz factor</i>).	
form	Returns whether current format for exponential numbers is SCIENTIFIC or ENGINEERING.	
sourceline	Returns the total number of lines in the source script, or returns a specific line if a line number is supplied as an argument.	
time	Returns local time in 24-hour clock format. A variety of options allow the time to be returned in any desired format. Can also be used to measure elapsed time (as an <i>interval timer</i>).	
trace	Returns the current trace level.	

Many of these functions can also be used to set operational characteristics by supplying input arguments. We've seen examples of all these functions except for date and time.

The stream function is also useful for retrieving information about I/O operations and the I/O environment. Most Rexx interpreters provide for a much broader use of the stream function than the Rexx standards minimally require. This transforms the stream function into a general-purpose mechanism for retrieving I/O information, controlling I/O devices, and issuing I/O commands. All interpreters minimally support these two stream options:

- □ D (Description) An implementation-dependent description of I/O status
- \square S (Status) The state of the stream: ERROR, NOTREADY, READY, or UNKNOWN

Individual I/O operations return values that indicate whether the I/O operation was successful. Take a new look at the I/O functions from the perspective of their return values and the information these carry:

I/O Function	I/O Information Returned	
charin	Returns the number of characters read (0 if none were read).	
charout	Returns the number of characters <i>not</i> successfully written (0 means success).	
chars	Returns a nonzero value if at least one character remains to be read.	
linein	Returns a line read from a file or the null string if no line exists to read.	
lineout	Return value varies by requested operation. For writing one line, a return value of 0 means the line was successfully written, 1 means it was not.	
lines	Returns a nonzero value if there is at least one line left to be read.	

The chars and lines functions may return either the exact number of characters or lines left to be read, or 1, indicating that some unspecified number of characters or lines remain to be read. The ANSI-1996 standard permits the interpreter flexibility in this regard. The trade-off is between providing precise information about the amount of data left to be processed in the file versus the performance overhead of calculating this value.

Trap or exception routines help script writers managed I/O errors raised by the NOTREADY and SYNTAX conditions. signal on or call on instructions enable trap routines you write in the program. Trap routines can be used to handle these error conditions: SYNTAX, HALT, ERROR, FAILURE, NOVALUE, NOTREADY, and LOSTDIGITS. These built-in functions provide useful information to trap routines:

Function	Feedback to the Error Routine
condition	Returns the name of trapped condition, a textual description of the condition, how the trap routine was invoked (call or signal), and the current state of the trapped condition (ON, OFF, or DELAY)
errortext	Returns the textual error message for a given Rexx error number
sourceline	Returns the number of lines in the source script, or a specific line if a line number is supplied as an argument
trace	Returns the current trace level, or can be used to alter it

All these functions can be coded anywhere in Rexx scripts except for condition, which specifically returns information about the current trapped condition and is thus not likely to be useful outside of a trap routine.

Several important Rexx *special variables* provide information both to trap routines and throughout Rexx scripts. The three special variables in the TRL-2 standard are uninitialized until an event occurs that sets them:

Special Variable	Meaning	
rc	The return code from a host command, or a Rexx SYNTAX error code.	
sigl	The line number that caused control to jump to a label. This could be set by the transfer of control caused by a trapped condition, or simply by a regular call to an internal routine or invoking an internal function.	
result	The string sent back to a calling routine by the return instruction. If return is coded without an operand, result is set to uninitialized.	

Previous chapters in this book have mentioned most of these sources of information for Rexx scripts. Our intent here is to consolidate this information, then build upon it and combine it with new features to show how you can write portable scripts. Now, let's move on to adding new sources of environmental information: the parse source and parse version instructions.

The parse source instruction provides three information elements. They are listed in this table:

parse source Information Element	Meaning
system	A single word for the platform on which the script is running. Often cites the operating system.
invocation	One word that indicates how the script was invoked. Often returns COMMAND, FUNCTION or SUBROUTINE.
filename	The name of the file containing the Rexx script that is running. Usually this is a fully qualified file name conforming to the conventions of the operating system on which the script is running.

Here's sample code that shows how to retrieve this system information:

```
parse source system invocation filename .
say 'System:' system 'Invocation:' invocation 'Filename:' filename
```

The output of this code, of course, depends on the platform on which it is run. Here's an example of the output generated when this code runs under Regina Rexx on a Windows system:

```
System: WIN64 Invocation: COMMAND Filename: C:\Regina\pgms\parseenv.rexx
```

The same statements run under many Linux distributions with Regina yield:

```
System: UNIX Invocation: COMMAND Filename: /regina/parseenv.rexx
```

This output is system-dependent (which is the entire point!). By retrieving it the script can understand on which platform it is running. The script also knows the filename containing its own code and the manner in which it was invoked. Of course, the filename will represent the file-naming conventions of the operating system on which the script runs. For example, Windows filenames will have backslashes between directory levels, while Linux, Unix, and BSD will contain forward slashes between directory names.

The system or platform keyword is most significant. Table L-1 in Appendix L lists common values for the system data element for popular Rexx interpreters running on various platforms. It also contains a script you can run on any system to return these environmental values. Using code like this cues your script into these platform differences.

The parse version instruction tells the script about the Rexx interpreter that is running it. While parse source yields basic platform information, parse version supplies basic interpreter information. This can be used, for example, to figure out in real time which Rexx features will be supported or which version of an interpreter is being used. Here are the parse version data items:

parse value Information Element	Meaning
language	Interpreter name and version
level	The <i>language level</i> this interpreter supports, according to the Rexx language levels described earlier in this chapter (e.g., 3.50, 4.00, 5.00, or similar identifier)
date	Along with month and year, describes the release date for the interpreter
month	See date
year	See date

Here's an example of how to code to retrieve this information:

```
parse version language level date month year .
say 'Language:' language 'Level:' level 'Date:' date 'Month:' month 'Year:' year
```

When run under Windows with Regina Rexx, here is sample output:

```
Language: REXX-Regina 3.9.6(MT) Level: 5.00 Date: 29 Month: Apr Year: 2024
```

Running the statements on many Linux distributions with Regina yields output like this:

```
Language: REXX-Regina_3.9.5(MT) Level: 5.00 Date: 25 Month: Jun Year: 2022
```

The level is especially important because it tells the script what Rexx features it can expect to see. The script could execute different code appropriate to the particular interpreter under which it runs to fulfill its tasks.

The language allows the script to dynamically adapt to any known peculiarities or extensions offered by specific Rexx interpreters. Chapters 20 through 30 describe many of these extended features and how to use them.

After collecting information from parse source and parse version, a script usually knows enough about its environment that it can issue operating system commands appropriate to the platform on which it is running. By running different statements or modules based on the platform, scripts can be rendered platform-independent.

Another step is often useful. Based on the parse source system feedback, issue an operating system command appropriate to the OS that provides more information on its version and release level. For example, under Windows and DOS systems, execute the ver (version) command. For all forms of Linux, Unix, and BSD, run the uname command (such as uname -a). The script can capture the feedback from these commands and know exactly what operating system it is working with. (An error return code from the command shows that the script was not on track with the command it executed.) This can be trapped by an exception condition routine if desired or simply addressed by analyzing the command return code.

A Sample Program

To this point, we have discussed a variety of instructions and functions that can aid in writing portable code. Some of these functions were introduced in earlier chapters in different contexts, while others are newly introduced in this chapter. All are useful to writing portable code because all supply environmental information to scripts. Now, we need to look at an example program that shows how to synthesize this information into portable code.

This example program determines the Rexx interpreter under which it runs and the Rexx standards for that interpreter. This is a key ability portable scripts must have: the ability to determine how they are being run and under which interpreter. In this instance, the script expects to see the Regina interpreter. If not, it displays a message.

The script also determines whether it is running under Windows or Linux. It issues an OS command to determine the OS version and release (either ver for Windows or uname -a for Linux). Then it displays the OS version and release information to the user.

```
/* WHERE AM I:
/*
     This script learns about its environment and determines
     exactly which Windows or Linux OS it runs under.
parse version language level
                              date
                                        month year .
parse source system invocation filename .
language = translate(language)
                                   /* ensure using Regina Rexx */
if pos('REGINA', language) = 0 then
   say 'ERROR: Interpreter is not Regina:' language
   say 'Interpreter version/release date:' date month year
   say 'Language standards level is: ' level
   say 'Version information from an OS command follows...'
   /* determine operating system, get its version/release info
   select
     when system = 'WIN32' | system = 'WIN64' then
         'ver'
      when system = 'UNIX' | system = 'LINUX' then
          'uname -a'
      otherwise
         say 'Unexpected SYSTEM:' system
   if rc <> 0 then /* write message if OS command failed */
      say 'Bad return code on OS Version command:' rc
```

Here is sample output for this script on a Windows system running Regina Rexx:

```
Interpreter version/release date: 29 Apr 2024
Language standards level is: 5.00
Version information from an OS command follows...
Microsoft Windows [Version 6.1.760]
```

Here is output from the script when run under a common Linux distribution with Regina:

```
Interpreter version/release date: 25 Jun 2022
Language standards level is: 5.00
Version information from an OS command follows...
Linux dell1 5.15.0-112-generic #122-Ubuntu SMP Thu May 23 07:48:21 UTC 2024 x86_64
x86 64 x86 64 GNU/Linux
```

Let's discuss the program code. In the program, these two lines retrieve all the necessary environmental information:

```
parse version language level date month year \boldsymbol{.} parse source system invocation filename .
```

Following these statements, the select instruction issues either the ver command for Windows systems, or the uname -a command for Linux and Unix systems. The following code snippet shows how scripts can dynamically tailor any operating system dependent commands they issue. The select statement keys off of the environmental feedback previously retrieved by the parse source instruction:

```
select
  when system = 'WIN32' | system = 'WIN64' then
    'ver'
  when system = 'UNIX' | system = 'LINUX' then
    'uname -a'
  otherwise
    say 'Unexpected SYSTEM:' system
end
```

In this manner, the script interacts intelligently with its environment. The Where Am I? script could easily be turned into a generic function or subroutine which returns environmental information depending on its input parameters. It then becomes a generalized *service routine*, which can be incorporated into any larger script. In this manner, a script can learn about its environment and adapt its behavior and the commands it issues to become portable and platform-independent.

Techniques for Command Portability

To this point, we have summarized the various instructions and functions that aid in making code portable, and we have synthesized several of them into a sample program that determines critical facts about its environment. Now we can discuss various approaches for designing portable scripts that issue operating system commands.

The first rule is simple and sometimes applicable: minimize the use of OS commands. This eliminates the case in which a script casually issues an OS command which really is not necessary, thereby compromising its portability.

Where equivalent OS commands exist and their results can be handled generically, simple if instructions can issue the appropriate OS command. For example, the script named Menu in Chapter 3 issued the Windows cls (clear screen) command to clear the display screen before writing its menu for the user. The direct equivalent command under Linux and Unix is clear. Since these two commands are

equivalent in function, the program could easily be made portable simply by determining which operating system the script runs on, and then issuing the proper command to clear the display screen through a simple <code>if</code> instruction.

Of course, return codes from commands are just as system-dependent as the commands themselves. Generally, a return code of 0 means success, while anything else means failure. This example shows that the situation is vastly simplified if the script does not need to inspect or react to return codes.

What if the OS command produces output the script needs to process? This is a more complicated case. For example, say that the program issues the dir command under Windows or the ls command under Linux or Unix to display a file list to the user. The outputs of these two commands are close enough that if the goal is merely to display the file listing to the user, the script can use the same technique as with the cls and clear commands—just encode an if statement to issue the appropriate command for the operating system and display its output to the user. But if the script processes the command outputs, the situation becomes much more complicated. Output formats from dir and ls are significantly different. Here the approach might be to invoke an appropriate internal function specific to each operating system to issue the file list command and perform the analysis of its output. This is another common technique—code a different OS-dependent module to handle each operating system's commands.

A third technique is to determine the platform, then invoke an entirely different script depending on which operating system is involved. Here the top-level, or driving, script is only a small block of code at the very highest level of the program. It does little more than identify the operating system. After this determination, it calls an OS-dependent script.

Which technique is best depends on the tasks the script performs and the numbers and kinds of operating system commands it issues. The *binding* or degree to which the code depends on the operating system determines which approach makes sense for a given situation. In all cases, identifying the platform on which the script is running is the first step, and isolating OS-dependent code (by if logic or into separate modules or routines) is the key.

Foreknowledge of the need for portability and the operating systems that will be supported vastly reduces the effort involved in developing portable code. The similarity (or differences) among the supported platforms is another critical factor in determining the effort required. For example, it is relatively easy to develop a script that is portable across all versions of Windows, or to test a script across all major Linux distributions. It's quite another matter to port a script that issues a lot of OS commands from Windows to Linux or vice versa.

Issues in Code Portability

At the beginning of this chapter, we discussed a few factors that affect the portability of code. Now that we've described the instructions, functions, and coding techniques that pertain to portability, we can revisit the earlier discussion with greater specificity. Let's explore these issues in greater detail. Here are a number of issues of which to be aware when writing portable scripts:

□ Retrieving platform and interpreter information — The earlier sample script demonstrates how to retrieve operating system and Rexx interpreter information. Implemented as a callable service routine, such code can be used by any Rexx script to get the information it needs to run as a cross-platform program. A service routine that determines operating system, platform, interpreter, and other environmental information forms the basis of platform-independent code in many large applications.

Writing Portable Rexx

Screen interfaces — Input/output to the display screen is a major area of incompatibility among many platforms. Using a cross-platform user interface like the Rexx/TK or Rexx/DW libraries are one way to get around this problem — assuming that these interfaces are portable across the platforms on which the scripts will run. Chapter 16 discusses GUI interfaces in some detail.
Database interfaces — Databases can mask I/O differences across platforms. For example, interfacing your Rexx script to Oracle makes the I/O interface between Windows and Linux the same because Oracle calls are the same in both environments. Just ensure that the database itself can be relied upon for portability across the platforms you target. From this standpoint, major databases like Oracle and Db2 offer good portability among the major commercial databases. Among open source databases, MySQL, PostgreSQL (aka Postgres), SQLite, and Berkeley DB offer great portability. Chapter 15 discusses database programming in detail and shows how to accomplish it with sample scripts.
Other interfaces — We mention GUI and database interfaces specifically because these issues pertain to so many programs. But the principles apply to many other packages and interfaces as well — they may be useful as levers to gain more code portability, or they may hamper portability by their own isolation to certain environments. If portability is a goal, the key is to consider the impacts of any external packages with which your scripts will interface. Careful thought will allow you to leverage interfaces for greater application portability and avoid having them limit the portability of your scripts.
Character sets and code pages — Different platforms use different character-set-encoding schemes. For example, Windows, Linux, Unix, BSD, and DOS systems use ASCII, whereas mainframes use EBCDIC. Scripts that manipulate characters as hexadecimal or bit strings need to be aware of these different encodings. Related issues include <i>collating</i> (or sort) order and <i>code pages</i> or character sets.
Interpreter differences — We've already mentioned how scripts retrieve interpreter information. Code within the lowest common denominator language level to ensure the widest portability of your scripts. We might call this interpreter portability — Rexx scripts that can be run under any Rexx interpreter. This trades off the convenience and power of using implementation-specific built-in functions, for example, for the benefit of code portability.
${\tt options}\ \textit{Instruction} - {\tt The}\ {\tt options}\ \ {\tt instruction}\ \ {\tt instruction}\ \ {\tt instructions}\ \ {\tt total}$ the Rexx interpreter. Its format is:
options expression

Here's an example that instructs a Rexx interpreter to conform to language level 5.00 and ensure that the trace is off:

options '5.00 Notrace'

The options that can be set are unique to each Rexx interpreter. Check your language manual to see what your version of Rexx supports. If the interpreter does not recognize any the items, it ignores them without issuing an error. This means that if it is important to know whether the options were set properly, your code will have to perform this task. (Wouldn't it be nice to have a corresponding options function by which your script could retrieve the options in effect? There is none.) Using options may force interpreter-dependent code unless its use is carefully controlled.

- ☐ Capturing errors by conditions The ability to trap conditions and process them through error routines can be a tool to gain greater cross-platform portability. NOTREADY might help with handling I/O issues while LOSTDIGITS can manage concerns with significant digits.
- ☐ *Universal "not" sign* Use the ANSI-standard symbol for the "not" sign, which is the backslash (\). For example, for "not equals" you should code \= or <> or >< instead of the mainframe-only symbols ¬=. See Figure 13-3.

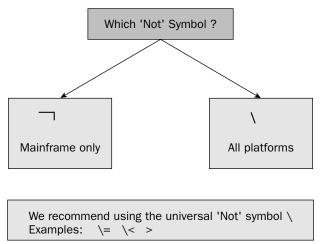


Figure 13-3

☐ First line of the script — For greatest portability, do not code a Linux/Unix/BSD interpreter-location line as the first line of the script, as in this example:

```
#!/usr/local/bin/rexx
```

Without this line, you'll typically have to run Rexx scripts explicitly. Instead code this as the first line of the script for maximum portability, starting in column 1 of line 1:

```
/* REXX */
```

This ensures that the script will run properly on mainframes running VM or OS, and it's still compatible with almost every other platform, as long as the script runs explicitly.

The address instruction — The address instruction sends input to OS commands and captures their output. The ANSI-1996 address instruction standard provides for the new keywords input, output, and error to manage command I/O. The alternatives are to use the stack for command I/O when using the address instruction, or to avoid the address instruction entirely by using redirected I/O.

Many Rexx interpreters still emphasize the stack for command I/O, yet this feature is not central to the ANSI-1996 standard. The ANSI-1996 address keywords for I/O are the true standard, yet many Rexx interpreters still do not support them. You'll have to investigate what interpreter(s) and platform(s) your portable code is to run on to decide which approach to use. Chapter 14 covers the address instruction in detail.

- □ Stay within the ANSI-1996 standard for the stack On the mainframe and in some other environments, the stack is not only used for command processing, it is used for many other purposes as well. For greatest portability, stay strictly within the stack definition provided by the ANSI-1996 standard. Or better, use standard language features other than the stack to accomplish the work.
- ☐ Use only standard operands The Rexx standards define certain instructions and functions and allows them to have implementation-specific (nonstandard) operands. Examples include the options instruction (to issue directions to the interpreter) and the stream function (to issue I/O commands). If portable code is a goal it is prudent not to use nonportable operands for these instructions and functions.

I/O and Code Portability

File input/outout is a major area in which operating systems differ. This is because the I/O routines, or I/O drivers, are different for every operating system. Whether you code in Rexx or some other scripting language, you may encounter I/O incompatibilities when scripts are run on different platforms. I/O should be *encapsulated* (or placed in separate routines or modules) to isolate this platform-specific code within large Rexx scripts.

OS differences lead to minor differences in Rexx implementations. Check your release-specific documentation to understand these differences.

Generally, line-oriented I/O is more portable than character-oriented I/O because character I/O may read OS-dependent characters (representing line or file end) as part of the input stream. Scripts can be written to rationalize the differences in character-oriented file I/O across platforms if they recognize this.

To stay within the strictest standards, assume that the chars and lines functions return 0 if there is no more data to read, or some nonzero value otherwise. The nonzero value might be the number of characters or lines left to read in a persistent stream, or it could simply be 1, indicating more data to read. These two functions should only be applied to *persistent streams* (files), not to *transient streams* (like keyboard input).

To explicitly flush the output buffers and close a file, code the lineout function without a string to write. Almost all Rexx implementations follow this TRL-2 standard. If program logic permits, the most standard, portable way to close a file is to simply let Rexx close it without instruction from the script.

The earlier section titled "How a Script Learns about Its Environment" discussed standard return codes from the I/O functions: charin, charout, chars, lines, linein, and lineout. Given that I/O varies across operating systems, this is one area in which many Rexx interpreters still do have minor differences. The reader is advised to check his specific interpreter documentation for details. When coding across platforms or developing code that runs under more than one Rexx implementation, check the documentation for all interpreters involved. And also, *test the script* under all the operating systems under which it will run!

Portable scripts should avoid explicitly positioning the read and write positions within files. Some Rexx interpreters provide good advanced facilities in this regard that are outside the Rexx standards. Part II discusses these extended features for file positioning and direct data access.

Interfaces for Portability — RexxUtil

We've previously mentioned that interfaces can aid in code portability. The popular *RexxUtil* package is an example. This is an external function library that enhances code portability across multiple platforms. These include operating systems in the Windows, Unix/Linux/BSD, macOS, mainframe, DOS, and OS/2 families. Instead of issuing operating-system-dependent commands, scripts can invoke routines in the RexxUtil package. These then translate the script's requests into OS-specific commands. This buffers the script from issuing operating-system unique commands.

Figure 13-4 shows how this works. A script invokes a RexxUtil service, and the RexxUtil function performs the appropriate operating system calls. Since RexxUtil runs on a number of platforms, it effectively shields the script from issuing OS-specific calls in order to access OS features and facilities. Instead, the script interfaces with the portable RexxUtil package.

Using an Interface Package to Increase Script Portability

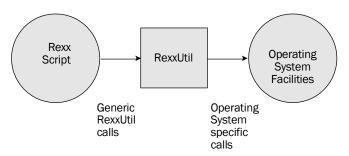


Figure 13-4

There have been various versions of the RexxUtil library over the years, tailored and adapted to a range of platforms, Rexx interpreters, and products. It might be useful to describe the kinds of functions that the library contains to give an idea of the system-specific requests from which it buffers scripts. This list enumerates and describes the major categories of functions in RexxUtil packages:

- Housekeeping These functions load the RexxUtil library and make it accessible, or drop it from use and memory.
- ☐ File system management These functions manage, manipulate, search, and control operating system files and directories.
- ☐ *System interaction* These functions retrieve operating system, environmental, configuration, and hardware information.
- ☐ *Macro-space control* These functions manage the macros available for execution. Macros can be loaded, cleared, dropped, initialized, stored, and so on.
- \square Console I/O These functions support basic screen and keyboard I/O.
- ☐ Stem manipulation These functions manipulate arrays via their stems. To give one example, the do over function processes an entire array in a simple loop, even for sparse arrays or arrays with non-numeric indexes or subscripts. These functions also provide for array I/O.

- ☐ *Semaphores* These functions manage semaphores (flags used for synchronization), including *mutexes* (semaphores designed to single-thread critical code sections).
- Character-set Conversions These functions convert to and from Unicode and support file encryption and decryption.

RexxUtil is not the only interface package which can be used to enhance code portability. Various database, GUI, and server-scripting packages provide the same platform-independence as the RexxUtil package. Chapters 15 through 18 describe a number of these interface packages and how to use them. Just be sure that the interface ports across all the platforms on which your scripts are to run!

Summary

This chapter discusses issues of code portability and offers some suggestions on how to write portable scripts. For some projects, code portability is a key goal. The ideas in this chapter may help achieve it. For other projects, portability is irrelevant and one doesn't need to spend time or effort on it. Always understand your project goals thoroughly before making these choices and coding a scripting solution.

Where code portability is a goal, understand the Rexx standards, the differences between them, and how the interpreter you are using fits with the standards. Coding to the standards is an important means to achieving portable code.

This chapter also listed many functions and instructions through which scripts can derive environmental information. We discussed a brief program that interrogated its environment to determine the interpreter running it as well as the operating system platform. Such a program can be expanded into a more robust, generic "service routine" to provide intelligence to other routines about their environment. The first step any portable script must take is understanding the environment in which it runs.

We discussed a list of issues developers face when striving to make their code portable. Hopefully, the discussion brought up points that stimulate your own thinking on how you can write code that is portable across the platforms with which you are concerned.

The next chapter goes into detail on how to issue commands from within scripts to the operating system (or other outside interface). It addresses how to send input to OS commands, how to check their return codes, how to capture their output, and how to capture their error messages.

Test Your Understanding

- **1.** Is code portability always a virtue?
- **2.** What instructions might a script issue to learn about its environment?
- **3.** What is the difference between arg and parse arg?
- **4.** What is the sourceline function used for?
- **5.** Where can you find a list of the differences between the TRL-1 and TRL-2 standards?

Issuing System Commands

Overview

One important use of Rexx is to develop *command procedures*. These are scripts that issue operating system commands. The ability to create command procedures is one of Rexx's great advantages. You can automate repetitive tasks, create scripts for system administration, and customize or tailor the operating system to your preferences.

Command procedures must manage many aspects of interaction with the operating systems, such as building and issuing the proper OS commands and handling bad return codes and errors.

Many refer to command procedures as *shell scripts*, although technically this is not quite accurate because Rexx is not a shell. Rexx is a scripting language interpreter that runs outside of the *shell* or OS command interpreter. (There is one exception: a version of Regina runs within the zsh shell and provides true shell scripting capability. With it you can permanently change the current environment and perform tasks that can only be accomplished from within a shell, such as setting environmental variables and changing the working directory).

Command procedures are useful for a wide variety of reasons. Scripting operating system commands allows you to:

Automate repetitive tasks — Ever been faced with entering a lengthy list of commands to get something done? Scripting allows you to automate these tasks, whether they are for system administration or simply for individual users.

An example is an "install script." For one site the author developed a simple install script that, once developed, ran on hundreds of desktops to install a relational database management system. Performing this task without automation would have been unthinkably time-consuming. The users themselves could not have done it because they did not have the expertise, and the tasks would have been too error-prone. Command scripting presented a time-efficient way to get this work done.

Save keystrokes — Creating simple scripts eliminates mundane typing and saves keystrokes. You can create "shortcuts" for command sequences and save time. Eliminate error — Many system commands are complicated. Scripting them eliminates the need to remember (and correctly enter) various cryptic switches and options. Embed intelligent interaction in the script — Error handling, special cases, and other unusual situations — these are not what you want to face when you interact with an operating system to perform some complex system administration task. Scripting allows you to embed intelligent interaction with the operating system in a portable, sharable form. Someone with less experience can run a script and perform a job without having the same level of expertise that was required to develop the script. Run scheduled tasks — Once commands are encoded in a script, that procedure can be run in offhours or scheduled to run whenever desired. This is referred to as a batch command or batch procedure. An example from the author's experience is scripting the create database command in a database system that single-threaded that task (only one such command could run at one time). We strung together the dozen create database commands we needed to issue in a simple Rexx script and let it run overnight. Had we performed this work interactively, it would have taken us over 14 hours. Running it during the day would have also meant developers could not use the server that day. Running the command script at night saved a day's work for the entire programming staff. Document procedures — The create database script provided us with an historical activity log, a file that we kept to document the parameters used in creating the databases. Performing the same work interactively often means that the actual commands that were issued and their output messages are lost or forgotten. Scripting can produce log files that later can be inspected or analyzed to understand what happened or to recall exactly what was done. Extend the operating system — Under most environments one can execute a Rexx script simply by entering its name. To the world, the script appears as if it were a new operating system command. Rexx thus provides a way to extend, enhance, customize or tailor the environment to either personal preference or corporate standard. Speed — In terms of elapsed or "wall clock" time, it is way faster to run a "batch" script than to interactively perform some set of tasks via a graphical user interface (GUI). GUIs are great for simplifying tasks that need to be performed interactively (read: manually). But scripted automation is always faster. Moreover, it is sometimes difficult to reduce complex tasks to simple repeatable procedures using GUIs because of their context-driven nature. GUIs and command

While writing scripts to automate operating system commands is very useful, there are some downsides. The big one is that any script that issues OS commands becomes platform-dependent. In most cases, this is fine. The whole point of a command script is to issue commands specific to the platform on which it runs. But don't issue operating-system-specific commands in a script you intend to port. If you do, think carefully about how this can be done in a modularized, portable way. It is not unusual to see scripts which issue just a few system commands and become system-dependent, only to mount an effort to port them later to some other platform. A little forethought can minimize porting effort. Chapter 13 covered this issue in its discussion of how to develop portable Rexx code.

scripts work together to handle interactive and automated tasks in an effective way.

Issuing Operating System Commands

Let's look at how to issue operating system commands from within scripts. We'll start with a very simple, one-line sample script; then we'll progress through various techniques that yield better flexibility and programmability. In the next section, we'll look closely at how scripts read feedback from the commands to ensure they ran properly. There are several techniques to accomplish this and you'll want to understand them all.

For a first example, here is a complete, one-line script that issues an operating system command. The script issues the Windows dir (directory) command:

```
dir /* this script issues the DIR command */
```

The output to this script depends on the files in the current directory. Here's an example:

```
Volume in drive D is WD_2
Volume Serial Number is 1E20-1F01
Directory of D:\Regina

. <DIR> 03-24-04 11:47p .
.. <DIR> 03-24-04 11:47p ..
REXX EXE 344,064 04-25-03 5:20p rexx.exe
REGINA EXE 40,960 04-25-03 5:21p regina.exe
REGINA DLL 385,024 04-25-03 5:21p regina.dll
```

First, we need to understand how the Rexx interpreter knows to send this command to the operating system for execution. The basic rule is this: Rexx evaluates the expressions in any line it reads. If it ends up with a string that it does not recognize (a string that is not a Rexx instruction, label, or assignment statement), Rexx passes the string to the *active environment* for execution.

By default, the active environment is the operating system. Sometimes this is called the *default environment*. Rexx does not "understand" or recognize operating system commands. Rexx evaluates expressions, ends up with a character string outside the Rexx language definition, and passes it to the active environment for execution.

After the command executes, control returns to the script line that immediately follows the command (exactly the same as if the script had called an internal or external routine). The special variable rc will contain the return code issued by the operating system command. What this value is depends on the command, the operating system, and the command's success or failure.

This example executes the Windows dir or directory command, captures the return code the operating system issues for that command, and displays an appropriate message:

It is important to remember two key rules when building commands. First, you are just building a character string (a string that represents a valid command), so you can leverage all the power of Rexx's string manipulation facilities to do this.

Here's an example that issues the directory command with two *switches* or options to the Windows command window. The Windows command we want to build lists files in the current directory sorted by size:

```
dir /OS
```

The coding to build this command uses automatic concatenation (with one blank) for pasting together the first two elements, and explicit concatenation by the concatenation operator to splice in the last item without any intervening space:

```
dir '/0' || 'S'
```

So, you can dynamically build character strings that represent commands to issue to the operating system in this fashion. You can even programmatically build arbitrarily complex commands using Rexx's expression evaluation. Here's a "gibberish generator" that ultimately builds and issues the exact same command:

Use whatever coding you want (or have to) to build operating system commands. It's all the same to the Rexx interpreter. You can leverage the flexibility inherent in the interpreter's evaluation of expressions prior to passing the resulting character string to the operating system for command execution.

Sometimes building the command string becomes complicated enough that developers prefer to build the string inside a variable, then issue the command by letting Rexx interpret that variable's contents:

This approach also makes it easy to verify that the command string is built correctly because you can just display it on the screen:

```
say command /* display the command to ensure correctness */
```

The second important rule to remember is that Rexx evaluates the expression *before* passing it to the operating system for execution. Say we directly coded the above dir command in the script, exactly like this:

```
dir /OS
```

The results are not what we expect:

```
Error 41 running "C:\Regina\pgms\dir_test.rexx", line 2: Bad arithmetic conversion
```

What happened? Rexx evaluates the expression *before* passing results to the outside command environment, the operating system, for execution. Rexx sees the slash as the division symbol, and recognizes that operands were not encoded correctly to evaluate the attempt at division. To avoid evaluating the expression, do what you always do in Rexx: enclose the command in quotation marks and make it a string literal. This line gives the expected result of a directory listing because the single quotation marks prevent Rexx from evaluating the string before sending it to the OS for execution:

```
'dir /OS'
```

Feedback from OS Commands

Of course, a script that issues an operating system command must ensure that the command executed properly. Most scripts need to verify the command by feedback they receive after it executes. Feedback from OS commands comes in several forms:

- ☐ The command return code
- ☐ Error condition traps
- ☐ The command's textual output. This potentially includes an error message

To view the command *return code*, simply view the value of special variable rc. Rexx sets this special variable for your script to inspect after the command has been issued. Since command return codes are both OS- and command- specific, refer to the operating system's documentation or online help system to see possible values.

Robust code handles all possible error codes. A typical approach is to identify and directly address the most common ones in the script, such as "success" and "failure." Unexpected or highly specific return codes can be handled by displaying, printing, and logging them.

One occassionally sees scripts that ignore command return codes. This mistake leads to scripts that cannot even tell if the OS commands they issue succeeded or failed. We strongly recommend that any script check whether the OS commands it issues succeed. In return for the small amount of time you save in not checking command return codes, the user is left absolutely clueless when an error occurs. Design scripts to *fail safe*, so they at least display appropriate error messages when commands they issue fail.

Error or *exception routines* are another way to manage OS commands that result in error. Chapter 10 demonstrated how command errors and failures can be trapped and addressed in special routines by coding an error trap routine. Enable that routine through these instructions:

```
signal on error
signal on failure
call on error
call on failure
```

If call on failure and signal on failure are not active, the ERROR condition is raised instead. So, you could handle both situations without distinguishing between them simply by coding call on error or signal on error.

The last form of command feedback is the textual output the command issues. This could be valid command output, such as the list of filenames that result from the dir command. Or it could be an error message. For example, a dir command might result in a textual error message such as:

```
File Not Found
```

Your script can capture and analyze the OS command output. It can take special actions if the text output is an error or warning message of some kind.

Let's look at a simple way to capture output from an operating system command. Most operating systems permit *I/O redirection*, the ability to direct an input stream into a command and the ability to direct its output to a file. Operating systems that support redirection include all forms of Linux, Unix, BSD, Windows, and DOS.

One simple way to capture command output is to redirect the output of that command to a file, then read the file's contents from within the Rexx program. This complete script issues the dir command and redirects its output to a file named diroutput.txt. The do loop then reads all lines from this file and displays them on the screen:

The lines and linein functions refer to the file named diroutput.txt. You may or may not need to quote the filename depending on which operating system the script runs under. Unix-derived systems like Linux use case-sensitive filenames, so you will typically encode filenames in quotation marks. Windows and related systems do not necessarily require quoting filenames in that they are not case-sensitive. The above code is a Windows example.

Of course, the point of redirecting command output is to capture it so that the script can analyze it. Instead of displaying the output, as above, the script might parse it looking for messages that indicate specific errors, for example. Then it could intelligently identify and respond to those errors.

In the following table, you can see the three redirection symbols most operating systems support.

Redirection Symbol	Use
<	Input comes from the named file.
>	Output is written to the specified file. If the file does not exist it is created. If the file does exist, it is over-written.
>>	Output is appended (added on to the end of) the specified file. If the file does not exist it is created. Use this symbol to preserve existing file contents and add to it.

In the Rexx script above, we have surrounded the entire dir command with single quotation marks. This prevents Rexx from becoming confused by the output redirection symbol (>) during expression evaluation. Otherwise Rexx interprets > as its "greater than" symbol. The single quotation marks prevent Rexx from evaluating the expression, so it passes the entire string, including the redirection symbol to the default command environment (the operating system) for execution.

Here's an example in which a Rexx script redirects both input and output for an operating system command. This is a sort command, as issued from within the Rexx script:

```
'sort <sortin.txt >sortout.txt'
```

The script directs that the sort command take its input to sort from the file sortin.txt, and that it send the sorted list to the output file sortout.txt. If the input file sortin.txt contains these lines:

```
python
rexx
perl
php
```

The output file sortout.txt contains the same items in sorted order:

```
perl
php
python
rexx
```

The script can set up the input file to the sort by creating it, if desired. The script accesses the output file simply by reading its contents. The script could then perform any desired analysis of the command output. For example, it could parse the output to recognize and respond to common error messages. It could recognize error messages from the sort command such as these examples:

```
Invalid switch

Input file not found
```

Of course, the script needs to know from where to read the error messages. On some operating systems, error messages will appear concatenated to or in place of the results when an error occurs. On others, they may go to a default output device with a standard name, such as stderr. stderr may or may not be directed by default to the same place as command output, depending on the operating system and the command redirection syntax you encoded. For example, for a Windows script to intercept error messages through the same location as it reads correct command output, the sort command would need to be changed to the following:

```
'sort <sortin.txt >sortout.txt 2>&1'
```

This Windows-specific form of the command directs standard error output (stderr) to the same output file as the sort command's output. So, if an error occurs, the phrase 2>&1 directs the textual error messages to the output file named sortout.txt. Here, the script can read, parse, and analyze any error messages that appear. Different operating systems have different conventions and syntax that dictate where and how scripts access command error messages. Most Unix-derived operating systems employ a similar syntax to this Windows example.

The more sophisticated the script, the better it will be at these two tasks:

Recognizing textual error messages
Responding to them intelligently

You must consider how comprehensive and fail-proof you want your script to be. It might just report any unexpected output to the user and stop, or it could be intelligent enough to identify and react to every possible command error. Different levels of coding will be appropriate for different situations. There is clearly a trade-off between effort and the robustness of a script. The choice is yours. We recommend minimally recognizing that an error has occurred and informing the user with a descriptive message.

Rexx provides other ways to feed input to operating system commands and to capture their output. These offer flexibility and address operating systems and other command environments that do not support redirection. We discuss them next.

Controlling Command I/O

With this introduction to issuing operating system commands, several questions pop up. For operating systems that do not support redirection, or in cases where we want to control these operations more closely from within the script, we must address these issues:

- ☐ How to direct input lines to a command
- ☐ How to capture command outputs
- □ How to capture command error messages
- ☐ How to issue commands to environments other than the operating system

The address instruction fulfills all these needs. It allows you to specify an origin for command input and targets for command output and command error output. The address instruction refers to command input, output and error messages by the following keywords:

Command I/O	address Keyword
Command input	input
Command output	output
Command error output	error

The input, output, and error parameters can be specified in either of two ways, as character streams or arrays. This is the basic format for the address instruction that redirects the command's input, output and error information via three *character streams*:

```
address environment command WITH INPUT STREAM filename_1 ,
OUTPUT STREAM filename_2 ,
ERROR STREAM filename_3
```

The with clause and its keywords input, output, and error were added to Rexx as part of the ANSI-1996 standard. Here is the same command with input, output, and error information directed to and from three different *arrays*:

```
address environment command WITH INPUT STEM array_name_1.,
OUTPUT STEM array_name_2.,
ERROR STEM array_name_3.
```

The keywords stream and stem redirect to files or arrays, respectively, when using the address instruction. The period is a required part of the array names because the address instruction refers to what are properly termed *stem variables*.

The *environment* appears immediately after the address keyword. The *environment* is the target to which commands are sent. In all examples we've presented thus far this is the operating system. But it also could be a variety of other programs or interfaces, for example, a text editor or a network interface. What environments are available depend on the platform on which the script runs and which tools or interfaces are installed on that platform. The available environments are platform-dependent.

In Regina Rexx, the string SYSTEM refers to the operating system. To maximize portability, this string is the same regardless of the platform on which the Regina script runs. Other Rexx interpreters refer to the operating system by other keywords. Table L-2 in Appendix L lists some of the popular ones and shows the instruction you run to determine its default for your system.

The *command* is the string to send to the *environment* for execution. It is evaluated *before* being sent to the *environment* for execution, so consider whether it should be enclosed in quotation marks to prevent evaluation. You can either create the command string in advance and refer to the variable holding it in the address instruction, or allow Rexx to dynamically create the command for you by its expression evaluation.

The keyword with is followed by one, two or three redirection statements. The three redirection statements are identified by the three keywords input, output, and error. Any one or all three of these redirections can occur; those not listed take defaults. They may be coded in any order.

input refers to the source of lines that will be fed into the *command* as input. This essentially redirects input for the *command*. output collects the *command* output, and error collects what the *command* sends to "standard error."

Using the keyword stream, as in the first example, means that input, output or error is directed to/from operating system files. For input, each line in the file is a line directed to the command's standard input. Command output and error are directed to the named output and error files.

The alternative to using streams for command input/output is arrays. The keyword stem permits coding an array name for the three redirections. Be sure to code the *stem name* of the array as shown earlier (the name of the array immediately followed by a single period).

When using array input, you are required to first set array element 0 to the number of lines that are in the input. Using the preceding example, if the input has 10 lines, set it like this *before* issuing the address instruction:

```
array_name_1.0 = 10
```

You would also move the 10 input lines into the array before issuing the operating system command. In this example, this means setting the values of array_name_1.1 through array_name_1.10 with the appropriate command input lines.

After the command executes, array element 0 for output contains the number of lines output, and array element 0 for error contains the number of error lines output. For example, this statement displays the number of output lines from the command:

```
say array_name_2.0 /* display number of output lines from the command */
```

Display all the output lines from the command simply by coding a loop like this:

```
do j = 1 to array_name_2.0
    /* process array elements here */
end
```

This is the preferred technique for displaying or processing the command output. Another technique is to set the array to the null string before issuing the command:

```
array_name_2. = '' /* all unused array values are now the null string */
```

Process all elements in the output array by checking for the null string:

```
do j = 1 while array_name2.j <> ''
    /* process array elements here */
end
```

You can intermix stream and array I/O in one address instruction. For example, you could present command input in an array, and direct the command output and error to files. Or, you could send file input to the command, and specify that its outputs and error messages go into arrays. There is no relationship among the three specifiers; use whatever fits your scripting needs.

One can even code the same names for input, output, and error. Rexx tries to keep them straight and not intermix their I/O. This practice becomes complicated and confers no particular advantage. It is not recommended.

A Few Examples

To this point, we have described the basic ways in which scripts control and access command I/O. The address instruction underlies these techniques. Since the address instruction is easier to demonstrate than it is to describe, we need to look at a few more examples.

Remember how we redirected input to the sort command earlier and redirected its output? We did this through the redirection operators supported in operating systems like Windows, Linux, Unix, BSD, and DOS through this command:

```
'sort <sortin.txt >sortout.txt'
```

This address instruction achieves the same result. We've enclosed the input and output filenames in single quotation marks to prevent uppercasing:

```
address SYSTEM sort WITH INPUT STREAM 'sortin.txt' ,
OUTPUT STREAM 'sortout.txt'
```

We code the keyword SYSTEM because Regina Rexx defines this string as its standard identifier for the operating system (regardless of what the underlying OS may be). Other Rexx interpreters may require other strings under various operating systems (see Table L-2 in Appendix L).

The keyword with tells Rexx that one, two or three redirections will follow, identified by the keywords input, output, and error. These three keywords may appear in any order. Those that are not coded take defaults. Since we want to send input to the sort command from a file, we coded keyword stream, followed by the filename, sortin.txt.

Coding output stream tells Rexx to send the command output to the file named sortout.txt. Rexx is case-insensitive, so the case of keywords like with input stream is irrelevant to the interpreter. We used mixed case here simply to clarify the address instruction keywords.

output and error streams can either replace or be appended to the named files. Use the keywords replace or append to denote this. replace is the default. Here is the same example that was given earlier, but with the provision that the output stream will be added (appended) to, instead of replaced:

```
address SYSTEM sort WITH INPUT STREAM 'sortin.txt' ,
OUTPUT APPEND STREAM 'sortout.txt'
```

Recall that the comma (,) is the *continuation character*. We've coded it here simply to continue this long instruction across lines. We also placed single quotation marks around the filenames. The instruction works without them but then the filenames will be altered to uppercase. Whether this is desirable depends on the operating system. Operating systems like Linux, Unix, and BSD are case-sensitive in their file-naming convention; operating systems like Windows and DOS are not.

Since we've specified append on the address instruction's output stream, if no output file named sortout.txt exists, running this instruction results in an output file containing:

```
perl
php
python
rexx
```

Running the command a second time appends to the output file for this result:

```
perl
php
python
rexx
perl
php
pyton
rexx
```

The replace option would always give the same result that is listed first in this example. In other words, the replace option replaces any existing file with the results, while append will add results to the end of an existing file.

You can mix file I/O and array I/O in the same address instruction. This example provides input via an array but writes the output to a file to give the same results as the previous examples:

You *must* place the number of input array lines in element 0 of that array *prior* to executing the address instruction or it will fail. Of course, you also place the elements to pass in to the command in the array. If you specify array output, Rexx communicates to your program how many output and error lines are produced by filling in array element 0 with that value.

Discovering Defaults — the address Function

Many Rexx instructions have corresponding functions. For example, the arg instruction reads input arguments while the arg function returns information about input arguments. In like manner, the address builtin function complements the address instruction. Use the address function to find out what the default command environment is. This statement displays the default command environment:

```
say address() /* displays default command environment. Example: SYSTEM */
```

The ANSI-1996 standard added several parameters you can specify on the address function to retrieve specific address instruction settings. The following table lists the address function options:

address Function Option	Option Stands For	Meaning
I	Input	Returns the input default
О	Output	Returns the output default
Е	Error	Returns the error default
N	Normal	Returns the default environment

Here is an example. This say instruction displays the defaults for each source or target:

```
say 'Input source: ' address('I') ,
    'Output target:' address('O') ,
    'Error target: ' address('E')
```

What this displays will be system and interpreter dependent. Here's an example of output for Regina Rexx running on a Windows computer:

```
Input source: INPUT NORMAL Output target: REPLACE NORMAL Error target: REPLACE NORMAL
```

The address function, then, is the basic means through which a script can get information about where its commands will be issued and how their I/O is controlled.

Issuing Commands to Other Environments

In addition to redirecting command I/O, the address instruction is the basic mechanism by which you direct commands to environments other than the operating system. To do this, simply code a different environment on the address instruction:

```
address KEDIT 'set autosave 5'
```

This example sends a command to the KEDIT program, a text editor. Of course, what environments are available (and how you refer to them in the *environment* string), strictly depends on your platform and the available interfaces. Typical command interfaces are for program and text editors, network control, teleprocessing monitors, and the like.

There are two basic ways to tell Rexx where to send commands to. We've seen one — code the *environment* string on the address instruction. Another way is to issue the address instruction with an *environment* specified but lacking a command. This sets the command target for all subsequent commands. Look at these commands run in sequence:

```
address SYSTEM /* all commands now will go to SYSTEM for execution */

'dir' /* list all files in the directory */

'ver' /* see what version of Windows we're running */

address KEDIT /* all commands will now go to KEDIT for execution */

'set autosave 5' /* issue a command to KEDIT */

address SYSTEM /* all subsequent commands go to SYSTEM again */

'help' /* list commands for which Windows offers Help */
```

Using this form of the address instruction has the advantage that you can code shorter, more intelligible commands. But explicitly coding a command on the address instruction along with its environment better documents where the commands are sent for execution. Personal preference dictates which to use.

You might also see the address instruction coded without any target:

```
address
```

In this case, the instruction causes commands to be routed to the environment specified prior to the last time it was changed. In other words, repeated coding of address without any environment operand effectively "toggles" the target for commands back and forth between two target environments.

While this could be appropriate and convenient for certain situations, we do not recommend this approach. It becomes confusing; we prefer one of the two more self-documenting approaches described previously.

Remember that you can always code the address function to determine the target environment for commands:

```
say address() /* displays the default command environment. */
```

Finally, we mention that the address instruction requires that the *environment* must be a symbol or literal string. It cannot be a variable. As in certain other Rexx instructions, code the value keyword if you need to refer to the *environment* as a value contained in a variable:

Sending a variable parameter into the address instruction provides greater flexibility than hard-coding and allows scripts to dynamically change the target of any commands.

A Sample Program

You now know the basic techniques for issuing operating system commands and managing their results. Let's look at a sample program that shows some of these techniques in action.

This program provides command help information for a Windows computer. First it issues the Windows help command to the operating system without any operands. The command would be issued like this:

```
help
```

This command outputs a list of operating system commands with one line of description for each. The output looks similar to this:

```
ASSOC Displays or modifies file extension associations.

AT Schedules commands and programs to run on a computer.

ATTRIB Displays or changes file attributes.

BREAK Sets or clears extended CTRL+C checking.

... etc ...
```

The script captures this output and places it into an array. The command name is the index; the command description is stored in the array at that position. For example, the subscript ASSOC holds the line of help information on that command, the array element with subscript AT contains a line of information on that command, and so on.

(Note that a few commands contain more than one line of description. This program ignores the second line for those few commands.)

After building the array of command help information, the script prompts the user to enter an operating system command. In response, the script displays the one-line description for that command from the array. It also asks the user if he wants more detailed command information. If the user responds <code>yes</code> or <code>y</code>, then the program issues the help command for the specific command the user has chosen to the operating system. For example, if the user wants more information on the <code>dir</code> command, the script issues this Windows command on the user's behalf:

```
help dir
```

This OS command displays more extensive information about the command and its use. Several lines of command help information appear as well as a listing of command options or switches.

After the user views the verbose help information on the command, the program prompts him to enter another command about which he needs information. The user either enters another OS command seeking help information, or he enters quit and the program terminates.

Here is example interaction with this script:

```
C:\Regina\pgms> regina command_help.rexx
Enter Command you want Help on, or QUIT: ver
VER Displays the Windows version.
Want detailed information? n
```

```
Enter Command you want Help on, or QUIT: vol

VOL Displays a disk volume label and serial number.

Want detailed information? y
Displays the disk volume label and serial number, if they exist.

VOL [drive:]
Enter Command you want Help on, or QUIT: ls
LS No help available.
Enter Command you want Help on, or QUIT: quit
```

Here is the script:

```
/*
   COMMAND HELP:
/*
                                                                      */
/*
       (1) Gets HELP on all OS commands, puts it into an array.
       (2) Lets user get HELP info from the array or the OS.
trace off
                            /* ignore HELP command return code of '1'*/
cmd_text_out. = ''
                            /* array to read HELP output into
cmd help.
                            /* array to build with command HELP info */
address SYSTEM 'help' WITH OUTPUT STEM cmd_text_out.
/* read contents of CMD TEXT OUT, build help array CMD HELP
                                                                      */
do j=1 to cmd text out.0
  parse var cmd text out.j the command command desc
   cmd help.the command = command desc
/* allow user to query CMD HELP array & issue full HELP commands
                                                                      */
call charout , "Enter Command you want Help on, or QUIT: "
pull cmd in .
do while cmd in <> 'QUIT'
   if cmd_help.cmd_in = '' then
      say cmd_in ' No help available.'
   else do
     say cmd in cmd help.cmd in
      call charout , "Want detailed information? "
      pull answer .
      if answer = 'Y' | answer = 'YES' then
         address SYSTEM 'help' cmd_in
   end
   call charout ,"Enter Command you want Help on, or QUIT: "
  pull cmd in .
end
```

This script first sets the trace off, because issuing a valid help command under many Windows versions sends back a return code of 1. This contravenes normal operating system convention and means that if the script does not mask the trace off, the user will view error messages after the script (correctly) issues Windows help commands.

Then the script initializes all elements in its two arrays to the null string:

The subsequent address instruction gets output from the Windows help command into the array named cmd text out:

```
address SYSTEM 'help' WITH OUTPUT STEM cmd text out.
```

This instruction does not specify input to the help command because it intends to issue the help command without operands or any input. The output from the help command goes into the array cmd text out. Each element in this array contains an OS command and one line of help information.

The script needs to break apart the OS command from its single line of help information. The following code does this and builds the new array cmd help.

```
/* read contents of CMD_TEXT_OUT, build help array CMD_HELP */
do j=1 to cmd_text_out.0
   parse var cmd_text_out.j the_command command_desc
   cmd_help.the_command = command_desc
end
```

The <code>cmd_help</code> array contains one description line per Windows command. Its index is the command itself — it is an *associative array*, as explained in Chapter 4. Once the array is built, the next step is to prompt the user to enter the operating system command about which he wants help. This statement causes the prompt to appear on the user's screen:

```
call charout , "Enter Command you want Help on, or QUIT: "
```

The program then uses the command the user enters as an index into the <code>cmd_help</code> array. This statement applies that command as the index into the array and displays the associated line of help information to the user:

```
say cmd in cmd help.cmd in
```

Now, the script presents the user with a choice. Either he can ask for full information about the OS command about which he is inquiring, or he can say "no more" and ask about some other OS command. These statements prompt the user as to whether he wants more information about the current command:

```
call charout ,"Want detailed information?" pull answer .
```

If the user answers YES to this prompt, the script then issues the Windows help command with the OS command of interest as its operand. The generic format for this Windows help command is this:

```
help command
```

For example, if more information were desired about the Windows dir (directory) command, the script would issue this command to Windows:

```
help dir
```

As another example, if more information were needed about the ver (version) command, the script would issue this Windows command:

```
help ver
```

This form of the help command prompts Windows to display several lines of detailed help information on the screen. This is the line in the program that actually issues the extended help command:

```
address SYSTEM 'help' cmd in
```

The variable <code>cmd_in</code> is the command the user wants detailed information about. So, if the user requests information on the <code>dir</code> command, this statement resolves to:

```
address SYSTEM 'help' dir
```

Since SYSTEM is Regina Rexx's *default command environment*, the program did not need to explicitly encode the address instruction. This line would have given the same result:

```
'help' cmd in
```

This statement is less cluttered than coding the full address instruction, but one must know what the default command environment is to understand it. Some developers prefer to code the address instruction in full to better document their code. Others prefer to issue operating system commands without it for the sake of brevity.

Using the Stack for Command I/O

The manner in which commands are sent input and their outputs and errors are captured varies between Rexx interpreters. This chapter describes the ANSI-1996 standard, which specifies the input, output, and error keywords on the address instruction. Rexx interpreters increasingly comply with this standard, but not all do. Some Rexx interpreters have not yet upgraded to support the new ANSI 1996 forms of the address instruction. The ANSI-1996 standard ultimately should offer more portability, so this approach is recommended where possible.

For many years in mainframe Rexx, the external data queue or *stack* was used for communications between Rexx scripts and the commands they executed. (You'll recall that Chapter 11 discussed the stack and its use in some detail and presented several sample scripts that make use of it.) Because mainframe Rexx was the first available Rexx, and because the ANSI-1996 standard was devised rather late in the Rexx evolution, most Rexx interpreters also support the stack for command I/O.

Regina Rexx is typical in this regard. It fully supports the ANSI-1996 standard address instruction with its ANSI keywords for stream and stem I/O. But in recognition of the historical importance of mainframe Rexx, it alternatively allows you to use the stack for command I/O. This fits with Regina's philosophy of supporting all major standards, both de facto and de jure.

Using the stack for command I/O via its keywords FIFO and LIFO is an "allowed extension" to the ANSI-1996 standard. FIFO and LIFO stand for "first-in, first-out" and "last-in, first-out", respectively. Chapter 11 introduced these concepts along with their common uses for the stack.

Remember the example of how to code the sort using redirected input and output? The OS command we originally coded within a script was:

```
'sort <sortin.txt >sortout.txt'
```

This code implements the same result by using the stack in Regina Rexx:

The code places four unsorted items into the stack through the queue instruction. The address instruction uses the keywords input fifo to send those four items in unsorted order to the sort command. The output fifo keywords retrieve the four sorted items from the sort command in FIFO order. The two back-to-back single quotation marks that appear in these clauses mean that the default stack will be used:

```
WITH INPUT FIFO ''
WITH OUTPUT FIFO ''
```

Rexx clears or *flushes* the stack between its use as an input to the command and its role as a target to collect the command output. The interpreter endeavors to keep command input and output accurate (not intermixed).

The ${\tt do}\$ loop at the bottom of the script displays the four sorted items on the user's screen:

```
perl
php
python
rexx
```

We recommend using the ANSI-1996 standard address instruction and its keywords with, input, output, error, stream and stem. This is more portable than using the stack and is becoming more widely used. But either approach will work just fine.

Summary

Operating system commands bring great power to Rexx scripts, while scripting brings programmability and flexibility to operating systems. This chapter describes how Rexx scripts issue commands to the operating system and other target environments. It shows how to verify success or failure of these commands by checking their return codes, as well as other techniques to analyze command results. It also describes the several methods by which input can be sent to those commands, and through which command output and errors are captured.

Rexx implementations traditionally use the stack for command I/O, but developers increasingly favor the ANSI-1996 standard approach. This chapter illustrates both methods and showed several code examples.

We looked at the ways in which operating system commands can be assembled and submitted to the OS for execution. We investigated how scripts know whether commands succeed, and ways to inspect their error output. Then we explored the address instruction, the basic vehicle by which command I/O can be intercepted, managed, and controlled, and the address function, which returns information about the command execution environment. Finally, we showed how to use the stack for controlling command I/O. Many Rexx scripts use the stack for command I/O instead of the ANSI-1996 compliant address instruction.

Test Your Understanding

- **1.** When does Rexx send a command string to an external environment? What is the default environment?
- **2.** Why and under what conditions should you encode OS commands in quotation marks? Describe one method to prepare an entire command before coding it on the line that will be directed to the OS for execution. How would you print this command?
- **3.** What are the three basic ways to get feedback from OS commands within scripts. Where do you look up return code information for OS commands?
- **4.** Name two different ways to redirect OS command input and output in a script. Which should you use when?
- **5.** What are the two kinds of sources and targets you can specify with the address command? Can the two be intermixed within a single address command?
- 6. How do you code the address command to tell Rexx to send all subsequent commands to a particular target environment? How do you "toggle" the address target between two different environments?

Interfacing to Relational Databases

Overview

Many scripts are only useful when the scripting language interfaces to a wide variety of packages. For example, scripts need to control *graphic user interfaces*, or *GUIs*, perform database I/O, serve up customized Web pages, control TCP/IP or FTP connections for communications, display and manipulate images, and perform many other tasks that require interfaces to outside code.

Rexx offers a plethora of free and open-source interfaces, packages, and function libraries for these purposes. Appendix H lists and describes many of the more popular ones. This chapter explores how scripts interface to databases. Then Chapters 16 through 18 explore other free interfaces for Rexx scripts, including GUIs, graphical images, programming Web servers, and Extensible Markup Language (XML).

Databases are among the most important interfaces. Few industrial-strength programs can do without the power and data management services of modern *database management systems*, or *DBMS*.

Most database systems are *relational*. They view data in terms of *tables* composed of rows and columns. Relational DBMSs typically provide complete features for data management, including transactional or concurrency control, backup and recovery, various utilities, interfaces, query languages, programming interfaces, and other features for high-powered data management.

Several packages enable Rexx scripts to interface with databases. These allow the scripts to interface to almost any DBMS, including both open-source and commercial systems. This chapter focuses on the most popular open-source database interface, Rexx/SQL. Rexx/SQL interfaces Rexx scripts to almost any database. Among them are open-source databases like MySQL, PostgreSQL, Mini SQL, and SQLite, and commercial databases like Oracle, DB2 UDB, SQL Server, and Sybase. A full list follows in the next table.

Rexx/SQL has been production tested with several different Rexx interpreters, including Regina and Open Object Rexx. The examples in this chapter were all run using Regina Rexx with Rexx/SQL. Rexx/SQL supports two types of database interface: custom, or *native*, *interfaces* and *generic database interfaces*. Native interfaces are DBMS-specific. They confer performance advantages but work with only one database. Generic database interfaces work with almost any database and offer greater standardization and more portable code — but at the possible cost of lesser performance and the exclusion of non-standard features.

We cover Rexx/SQL in this chapter because it is:

Widely used
Open source
Interfaced to all major databases
Conforms to database standards

The sample scripts in this chapter all run against the MySQL open-source database. MySQL is the most widely used open-source database and we used it for the database examples because it fits with the book's emphasis on free and open-source software. While the sample scripts use the MySQL interface, they could run against databases other than MySQL with very minor modifications. In most cases, only the first database function call (SqlConnect) would have to be altered in these sample scripts to run them against other databases. The latter part of this chapter explains how to connect scripts to other popular databases, including Oracle, DB2 UDB, and Microsoft SQL Server. The chapter's sample scripts were tested on a Windows server running MySQL.

Rexx/SQL Features

The Rexx/SQL database interface follows the two major database standards for a call-level interface, or CLI. These two interface standards are the Open Database Connectivity Application Programming Interface, or ODBC API, and the X/Open CLI.

Rexx/SQL supports all expected relational database operations and features. It executes all kinds of SQL statements, including *Data Definition Language*, or *DDL*, and *Data Manipulation Language*, or *DML*. Data definition statements create, alter, and remove database objects. They include, for example, create table or drop index. Data manipulation statements operate on rows of data, and include such statements as select, insert, update, and delete.

Rexx/SQL provides all the features and functions with which you may be familiar from the call-level interface of any database. If you are familiar with the CLI used by Oracle, DB2 UDB, MySQL, or any almost any other database, you will find Rexx/SQL easy and convenient. Rexx/SQL supports features such as cursor processing, dynamic statement preparation, bind variables and placeholders, SQL control structures such as the *SQL Communications Area* (*SQLCA*), SQL error messages, null processing, autocommit options, concurrent database connections, and the retrieval and setting of database interface behaviors.

If you have no experience with call-level database processing, this chapter offers an entry-level tutorial. It will help you download and install Rexx/SQL and write simple Rexx scripts that process the database. Ultimately, you may want to pursue the topic of database processing further by reading about the ODBC or X/Open CLIs.

Downloading and Installing Rexx/SQL

Information on Rexx/SQL is available at http://rexxsql.sourceforge.net. If Web site addresses change, enter the keyword Rexx/SQL into any search engine and download sites will pop up.

Both source and binaries appear as downloadable for various platforms. For example, Windows users can download a *.zip file. Decompressing that file effectively installs the product. Linux, Unix, and BSD users can download *.tar.gz files. Source is available in *src.zip files.

Download the file specific to the database to which your Rexx scripts will connect, or download the generic ODBC driver. Look for these keywords within the download filename to tell you which database it supports, as outlined in the that follows.

Keyword	Supports
ORA	Oracle
DB2	Db2 (Db2 UDB)
SYB	Sybase
SAW	Sybase SQL Anywhere
MIN	Mini SQL (mSQL)
MY	MySQL
ODBC	Generic ODBC driver
UDBC	Openlink UDBC interface
SOL	Solid Server
VEL	Velocis (now Birdstep)
ING	Ingres
WAT	Watcom
INF	Informix
POS	Postgres and PostgreSQL
LITE	SQLite
PRO	Progress

Rexx/SQL uses these abbreviations throughout the product whenever there is a need to provide a standard moniker for a database. Of course, updates and changes may occur to the list so check the Rexx/SQL home page documentation to determine which databases are fully supported.

As an example, let's interface Rexx to a MySQL database under 64-bit Windows. Download either a file named rxsql__odbc_w64.zip or one named rxsql__my_w64.zip. Some of the underscores in these sample filenames are replaced by the version number of the product. For example, depending on the version number, a real filename might be something like rxsql24_odbc_w64.zip. The filenames show

Chapter 15

which database the driver supports. For example, rxsql24_odbc_w64.zip supports the generic ODBC driver, while rxsql24_my_w64.zip supports MySQL. We chose the native MySQL interface for the examples in this chapter, but either works fine and provides the same results.

Under Windows, if you use an ODBC driver, you must use Windows' *ODBC Data Sources Administrator Tool* to register the ODBC driver with Windows. On Windows, access this panel through Start | Settings | Control Panel | Administrative Tools | Data Sources (ODBC). Or use the Help function and search for keyword ODBC.

If you're not using Windows, or if you're on Windows but are using a native interface, registering the driver via the ODBC Data Sources Administration Tool is not necessary. Since we use the native MySQL interface for the examples in this chapter, we did not have to use the ODBC Data Sources Administrator Tool.

The Rexx/SQL download will decompress to include files with names starting with the letters README. For example, in downloading the ODBC driver for Windows, we saw the two files README.odbc and README.rexxsql among the extracted files. *Read these files!* They tell you all you need to know about setting up Rexx/SQL for your particular platform.

On some platforms, you may need to finish the installation by setting a couple of environmental variables. The PATH variable on many operating systems might need to include the directory where Rexx/SQL is installed. The README file will tell you if any other actions are required.

For example, on Windows systems, the PATH should be set to include the folder in which the Rexx/SQL Dynamic Link Library, or DLL, file resides, named rexxsql.dll. For Linux, Unix, and BSD systems, the directory in which the shared library file for Rexx/SQL resides must be pointed to by the environmental variable that references library files. On Linux this environmental variable is named LD_LIBRARY_PATH. See the README file for this name for other Unix-derived operating systems.

Once Rexx/SQL is installed, run the product's test script named simple.cmd. It resides in the directory in which Rexx/SQL installs. This test program simply connects, then disconnects, from the database for which you installed Rexx/SQL. It lists descriptive error messages in the event of any problem.

Next run the product test script named tester.cmd. This is a more ambitious test script that creates some tables, makes multiple database connections and disconnections, and runs a wide variety of common SQL statements on the database. The documentation at the top of this script gives you advice about how to run it. You must set an environmental variable or two, the nature of which varies by the database you use. Read the documentation at the top of the script for all the details — *prior* to running the script.

If the two test scripts work, Rexx/SQL is installed successfully on your system. Incidentally, the two test scripts provide excellent examples of how to code for Rexx/SQL in your scripts. Along with the sample scripts in this chapter, you can use them as coding models to get started with Rexx/SQL and database scripting.

The Basics

The Rexx/SQL database interface follows the two major database standards for a CLI: the *ODBC API* and the *X/Open CLI*. Interfacing with the database via the CLI means issuing a series of database or *SQL calls*. Rexx/SQL supplies these as a set of functions. The series of calls a script issues depends on the type of database activity the script performs.

Interfacing to Relational Databases

Let's discuss the Rexx/SQL database functions organized by functional area. Our goal here is to give you an overview of what these functions are, what they do, and how to apply them. (Appendix F describes all the functions in full detail. The appendix lists the functions alphabetically along with their full coding formats and coding examples.)

Database Connections. These functions enable scripts to connect to a specified database, manage that connection, and disconnect from the database when SQL processing is completed.

	SqlConnect — Connects to a SQL database
	${\tt SqlDisconnect} - {\tt Disconnects} \ from \ a \ SQL \ database$
	${\tt SqlGetInfo-Retrieves\ Rexx/SQL\ information\ about\ a\ connection}$
ם	${\tt SqlDefault-Switches}\ the\ default\ connection\ to\ another\ open\ connection$

Environmental Control. While there is but a single function for environmental control, it has an important role in database programming. This function allows scripts to either query or set various runtime values that affect their interactions with the database.

☐ SqlVariable — Retrieves or sets default runtime values

Issuing SQL Statements. These functions enable scripts to issue all kinds of database calls, including data definition and data manipulation statements. SQL statements can be executed by a single Rexx statement, or they can be prepared in advance and executed repeatedly and with optimal efficiency. These functions also allow scripts to process multiple-row result sets either with cursors or other techniques for multi-row processing.

SqlCommand—Issues a SQL statement to the connected database
${\tt SqlPrepare} -\! Allocates a work area for a SQL statement and prepares it for processing decomposition and prepares and $
SqlExecute — Executes a prepared statement
SqlDispose — Deallocates a work area for a statement
SqlOpen — Opens a cursor for a prepared select statement
SqlClose—Closes a cursor
SqlFetch—Fetches the next row from a cursor
SqlGetData — Extracts part of a column from a fetched row
SqlDescribe — Describes expressions from a select statement

Transaction Control. The two transaction control statements permit scripts to dictate when data changes are permanently applied to the database. Transaction control is fundamental to how databases guarantee data integrity and their ability to recover a database, if necessary.

SqlCommit — Commits the current transaction
SqlRollback — Rolls back the current transaction

We'll see examples of many of these SQL functions in the sample scripts that we will now discuss.


Example — Displaying Database Information

As explained previously, scripts interface to databases by issuing a series of Rexx/SQL function calls. The previous lists describe what these functions are named and what they do. Now we need to see how to put them together in real programs.

The first sample database script performs several "startup" and "concluding" actions that are common to all database scripts. The only real action it takes once it connects to the database is to report some environmental information it retrieves about the database. Here is what this first sample database script does:

- **1.** Loads the Rexx/SQL function library for use
- 2. Connects to the MySQL database
- 3. Retrieves and displays environmental information about the database
- **4.** Disconnects from the database

Figure 15-1 describes these actions diagrammatically as a flowchart. With the addition of database processing logic, this is the skeletal structure of most SQL scripts.

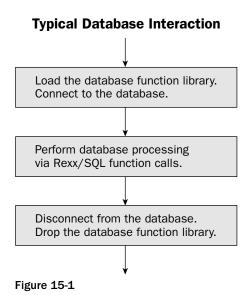

Here's what the output from the first sample script looks like. You can see it just displays some basic version information about the Rexx/SQL interface along with environmental information it retrieved from the database:

```
The Rexx/SQL Version is: rexxsql 2.4 02 Jan 2000 WIN32 MySQL
The database Name is: mySQL
The database Version is: 4.0.18-max-debug
```

Here's the script:

```
/* DATABASE INFO:
     Connects to MySQL, displays database information.
signal on syntax
                              /* capture SQL syntax errors */
/* load all SQL functions, make them accessible to this script */
if RxFuncAdd('SQLLoadFuncs','rexxsql', 'SQLLoadFuncs') <> 0 then
  say 'rxfuncadd failed, rc: ' rc
if SQLLoadFuncs() <> 0 then
  say 'sqlloadfuncs failed, rc: ' rc
/* connect to the MySQL database, use default user/password
                                                          */
if SQLConnect(,,,'mysql') <> 0 then call sqlerr 'On connect'
                                                          * /
/* get and display some database information
say 'The Rexx/SQL Version is:' SQLVariable('VERSION')
if SQLGetinfo(,'DBMSNAME','desc.') <> 0
   then call sqlerr 'Error getting db name'
   else say 'The database Name is: ' desc.1
if SQLGetinfo(,'DBMSVERSION','desc.') <> 0
   then call sqlerr 'Error getting db version'
   else say 'The database Version is: ' desc.1
/* disconnnect from the database and drop the SQL functions
if SQLDisconnect() <> 0 then call sqlerr 'On disconnect'
if SQLDropFuncs('UNLOAD') <> 0 then
   say 'sqldropfuncs failed, rc: ' rc
exit 0
/* capture any SQL error and write out SQLCA error messages
                                                          */
sqlerr: procedure expose sqlca.
  parse arg msg
  say 'Program failed, message is: ' msg
                                    /* write SQLCA messages */
  say sqlca.interrm
```

```
call SQLDropFuncs 'UNLOAD'
exit 99

syntax: procedure /* capture any syntax errors */
say 'Syntax error on line: ' sigl /* identify syntax error*/
return
```

The first step in this program is to load the Rexx/SQL external function library and make its functions available for the use of this script. Regina uses the *Systems Application Architecture*, or *SAA*, standard functions to achieve this. Here is one way of coding them:

```
if RxFuncAdd('SQLLoadFuncs','rexxsql', 'SQLLoadFuncs') <> 0 then
    say 'rxfuncadd failed, rc: ' rc

if SQLLoadFuncs() <> 0 then
    say 'sqlloadfuncs failed, rc: ' rc
```

The RxFuncAdd function first loads or *registers* the SqlLoadFuncs function. The middle parameter specifies the name of the file in which SqlLoadFuncs can be found. In Windows, this external library is a *Dynamic Link Library*, or *DLL*, file. It is named rexxsql.dll. The directory in which this file resides should be part of Windows' PATH environmental variable so that Regina can locate it.

Under Linux, Unix, and BSD, the equivalent of a Windows DLL is a *shared library file*. An environmental variable specifies the directory in which this shared library file resides. Different versions of Unix use different environmental variable names for this purpose, so check the README* file for the details for your Unix version. On most systems, it will be named LD_LIBRARY_PATH or LIBPATH. On Linux systems, this environmental variable is LD_LIBRARY_PATH.

To reiterate, the <code>RxFuncAdd</code> statement registers the function <code>SqlLoadFuncs</code>, which is part of the <code>Rexx/SQL</code> external library. The call to <code>SqlLoadFuncs</code> then loads the remainder of the <code>Rexx/SQL</code> external library. Now all its functions are available for the use of this script. See Chapter 20 if you want more detail on the functions to access external libraries.

Since all scripts that interface to databases use this code, consider placing it in a Rexx script function or subroutine. This takes it out of line for the main body of the code and simplifies your program.

Once the script loads the Rexx/SQL external function library, it can connect to the database. Here we connect to the MySQL database named mysql (one of the two databases MySQL creates by default when installed):

```
if SQLConnect(,,,'mysql') \iff 0 then call sqlerr 'On connect'
```

The SqlConnect statement can take several other parameters, as shown in its template diagram:

```
SQLCONNECT([connection name], [username], [password], [database], [host])
```

The required parameters for this statement vary by the database with which you are trying to connect. Our example only supplies the name of the database to which the script wishes to connect. SqlConnect is just about the only statement in Rexx/SQL whose coding is database-dependent. The section entitled "Working with Other Databases" later in this chapter discusses and illustrates how to code the SqlConnect function for systems like Oracle, DB2 UDB, SQL Server, and ODBC connections.

After connecting, the script executes the SqlVariable function to retrieve and display the version of Rexx/SQL:

```
say 'The Rexx/SQL Version is:' SQLVariable('VERSION')
```

Then the script invokes the SqlGetInfo function twice, with different parameters, to retrieve the DBMS name and version:

```
if SQLGetinfo(,'DBMSNAME','desc.') <> 0
if SQLGetinfo(,'DBMSVERSION','desc.') <> 0
```

Rexx/SQL places the results into the stem variable named in the call. Here this stem variable is desc., so the output strings we want are in the variable named desc.1. The full statements show how these values are retrieved and displayed:

```
if SQLGetinfo(,'DBMSNAME','desc.') <> 0
    then call sqlerr 'Error getting db name'
    else say 'The database Name is: 'desc.1

if SQLGetinfo(,'DBMSVERSION','desc.') <> 0
    then call sqlerr 'Error getting db version'
    else say 'The database Version is: 'desc.1
```

Its work done, the script disconnects from the database and drops the Rexx/SQL function library from memory. Scripts typically perform these two steps as their final database actions. Here is the code that implements these two terminating actions:

```
if SQLDisconnect() <> 0 then call sqlerr 'On disconnect'
if SQLDropFuncs('UNLOAD') <> 0 then
    say 'sqldropfuncs failed, rc: ' rc
```

We've nested the functions inside of if instructions in order to check their return codes. When performing database processing, we recommend *always* checking return codes from the database functions. If not for this little bit of extra code, the application could otherwise behave in ways that completely mystify its users, even when the problem is something so simple as a database that needs to be started up. It is standard practice in the database community to check the return code from every SQL statement in a program.

When database function errors occur, this script executes this internal routine:

Chapter 15

Here's an example of the kind of error message this routine might output. In this case, the SqlConnect function failed because an incorrect database name was supplied. The database name was incorrectly specified as mysqlxxxx instead of as mysql:

```
Program failed, message is: On connect
REXX/SQL-1: Database Error
SQL error is: Unknown database 'mysqlxxxx'
```

In this example, the error routine displays the SQL error message and stops the program (the last statement in the error routine is an <code>exit</code> instruction). You could write the routine to take any other appropriate action, as you see fit, and continue the program. You might even choose whether to end the program or continue it, depending on the nature and severity of the error the error routine encounters.

The error routine shows how to retrieve and display various error messages from the database. Its first line gives its full access to the *SQL Communications Area*, or *SQLCA*:

```
sglerr: procedure expose sglca.
```

The SQLCA is the basic data structure by which the DBMS passes status information back to the program. The status values in the SQLCA set by database activity include the following:

□ SQLCA.SQLCODE — SQL return code
□ SQLCA.SQLERRM — SQL error message text
□ SQLCA.SQLSTATE — Detailed status string (N/A on some ports)
□ SQLCA.SQLTEXT — Text of the last SQL statement
□ SQLCA.ROWCOUNT — Number of rows affected by the SQL operation
□ SQLCA.FUNCTION — The last Rexx external function called
□ SQLCA.INTCODE — The Rexx/SQL interface error number
□ SQLCA.INTERRM — Text of the Rexx/SQL interface error

Database scripts can either handle SQL errors in the body of the code (*inline*), or they can consolidate error handling into one routine, such as the sqlerr routine in the sample script. In large projects consolidating code is advantageous because it leads to code reuse, standardizes error handling, and reduces the size and complexity of the inline code.

The SYNTAX error condition trap fits right in with the sqlerr routine in capturing and handling SQL syntax errors. It is very easy to make syntax errors when coding to the SQL CLI because the character strings one issues to the database become complicated. The SYNTAX error condition trap manages this challenge:

For large applications, we recommend writing a single SQL error-handling routine and having all SQL errors sent to that routine. The SYNTAX trap routine can also call the SQL error handler, if desired. This sample script simplifies error handling for clarity of illustration. The test scripts distributed with Rexx/SQL provide a fuller and more robust SQL error handler. Review those scripts if you want to develop a more comprehensive, generalized SQL error handler.

Example — Create and Load a Table

Now we know how scripts connect to and access relational databases. The next step is to develop examples that issue data manipulation language statements to manage the data in databases, and data definition language statements to manage database objects like relational tables. To illustrate basic SQL programming, let's create a simple telephone number directory. Each entry (row) has only two columns: the person's last name and his or her telephone number.

This program creates a phone directory. It does this by creating a database table named phonedir, then loading it with data. The "data load" is simply an interactive loop that prompts the user to enter people's names and their phone numbers. When the user enters the character string EXIT, the program ends.

Here is the script:

```
/* PHONE DIRECTORY:
/*
     Creates the phone directory and loads data into it.
signal on syntax /* capture SQL syntax errors */
                              /* load all Rexx/SQL functions*/
call sql_initialize
if SQLConnect(,,,'mysql') <> 0 then call sqlerr 'On connect'
if SQLCommand(u1, "use test") <> 0 then call sqlerr 'On use'
/* drop the table if it exists, and create the table a-new
rc = SQLCommand(d1,"drop table phonedir") /* dont care about rc */
sqlstr = 'create table phonedir (lname char(10), phone char(8))'
if SQLCommand(c1,sqlstr) <> 0 then call sqlerr 'On create'
say "Enter last name and phone number ==> "
pull lname phone .
                                                           * /
/* this loop collects data from user, inserts it as new rows
do while (lname <> 'EXIT')
   sqlstr = "insert into phonedir values('" || lname || "'",
           ",'" || phone "')"
   if SQLCommand(i1, sqlstr) <> 0 then call sqlerr 'On insert'
```

The first line of the program enables the SYNTAX error condition:

```
signal on syntax /* capture SQL syntax errors */
```

Since the previous sample script, Database Info, already showed the code for the SYNTAX error handler, we have not shown it again in the above program. Similarly, the next line in the script invokes a new subroutine called sql_initialize:

```
call sql_initialize /* load all Rexx/SQL functions*/
```

This routine registers and loads the Rexx/SQL interface. It contains exactly the same code as the previous program (using the RxFuncAdd and SqlLoadFuncs functions). We do not duplicate this code in this example, in order to keep it as short and readable as possible.

After connecting to the database, the script tells MySQL which database it wants to use. It issues the MySQL use test database command through a single call to the SqlCommand function:

```
if SQLCommand(u1, "use test") <> 0 then call sqlerr 'On use'
```

For purposes of initialization, the script drops the phonedir table if it already exists. If the phonedir table does not exist and this statement fails, that's okay. We're only dropping it to ensure that the subsequent create table statement will not fail because the table already exists. (The pairing of drop table / create table statements in this manner is a common technique in database processing.) Here is the drop table statement:

```
rc = SQLCommand(d1,"drop table phonedir") /* dont care about rc */
```

The statements that create the database table phonedir come next:

```
sqlstr = 'create table phonedir (lname char(10), phone char(8))'
if SQLCommand(c1,sqlstr) <> 0 then call sqlerr 'On create'
```

As this code shows, the new table has only two columns: one for the person's last name and one for their phone number. The first statement builds the SQL create table statement in a variable, while the second statement executes that command. The second statement also references the sqlerr routine, because we consolidated all SQL error processing in a single routine. Since this routine contains the exact same code as the previous sample program, we have not included it in the program's code here.

The script now enters a do loop where it prompts for the user to enter names and their associated phone numbers. These two statements build and issue the SQL insert statement that adds each record to the database:

Instead of building the SQL statement separately, in the first statement, it could be nested inside of the SqlCommand function call. We use a separate statement to build this string because of its syntactical complexity. This makes for more readable code. A large percentage of SQL programming errors involve statement syntax, and this approach makes it easy to verify the SQL statement simply by displaying the string. We generally recommend building SQL statements in variables like this rather than dynamically concatenating them within the actual SQL function encoding.

To end the program, we need to issue the SqlDisconnect and SqlDropFuncs calls. Since this code is the same as the previous program, we've isolated it in its own routine called sql_pgm_end:

```
call sql_pgm_end /* disconnect, drop functions */
```

We don't include this code in the example because it duplicates the same lines as the previous sample script. You can see that using common routines for database connection, disconnection, and error handling is a very sensible approach. It both reduces the code you must write for each script and reduces errors.

In database programming, scripts must commit (make permanent) any database changes. In this script, the data is *auto-committed* to the database by disconnecting from the interface. Auto-commit automatically commits the data to the database if the script ends normally. Alternatively, the script could explicitly issue the SQL SqlCommit statement:

```
if SQLCommit() <> 0 then call sqlerr 'On commit'
```

The Rexx/SQL interface allows scripts to control the auto-commit feature. Use the SqlVariable function to retrieve and/or set this and other behaviors of the database interface. Simple programs like this sample script tend to rely on auto-commit to apply changes to the database upon their termination. More advanced database scripts require explicit control of commit processing. We'll see an example of the SQLCommit function later in this chapter in a script that updates the phone numbers in the database.

Example — Select All Results from a Table

Okay, we've created a table in the database and inserted a few rows in it. The preceding sample script shows how these tasks can be accomplished. The logical question now is: How do we view the rows in the table?

This script shows one easy way:

```
/****************************
/* PHONE DIRECTORY LIST:
/*
/* Displays the phone directory's contents.
/*
/*********************
signal on syntax
/* capture SQL syntax errors */
call sql_initialize
/* load all Rexx/SQL functions*/

if SQLConnect(,,,'mysql') <> 0 then call sqlerr 'On connect'
if SQLCommand(u1,"use test") <> 0 then call sqlerr 'On use'

sqlstr = 'select * from phonedir order by lname'
```

This script uses some of the same *database service routines* as the previous example:

- □ syntax Error routine that handles SYNTAX errors
- ☐ sql_initialize Registers and loads Rexx/SQL external functions
- □ sqlerr—Consolidates SQL statement error handling
- □ sql_pgm_end Disconnects from the database and drops Rexx/SQL functions

The code for these routines is in the first sample program and is not repeated here. The basic problem in this script is this: how do we execute a SQL select statement to retrieve and display the rows in the table? Here is the code that builds and executes the select statement:

```
sqlstr = 'select * from phonedir order by lname'
if SQLCommand(s1,sqlstr) <> 0 then call sqlerr 'On select'
```

This statement retrieves the data of the rows in the phonedir table. To display it, we need a do loop:

```
do j = 1 to sqlca.rowcount
   say 'Name:' s1.lname.j 'Phone:' s1.phone.j
end
```

The data elements in each row are referred to by this syntax:

```
Statement_name.Column_name.Row_identifier
```

In the example, for the person's name, this resolves to:

```
s1.lname.j
```

This neat Rexx/SQL syntax makes multiple row retrieval easy. Just put this row reference inside a do loop and display all the data. Later we'll see another way to display data from a SQL select statement via standard ODBC-X/Open programming, called *cursor processing*.

The variable sqlca.rowcount was set by the interface as feedback to the select statement. It tells how many rows were retrieved by the select, so we use it as the loop control limit. Another way to get this same information is to inspect element 0 in the returned rows. sl.lname.0 and sl.phone.0 also

contain a count of the number of rows retrieved. Instead of referring to sqlca.rowcount, as does the preceding code, we could also have coded the display loop as:

```
do j = 1 to s1.lname.0
    say 'Name:' s1.lname.j 'Phone:' s1.phone.j
end
```

Either approach to controlling the number of do loop iterations works fine. Once retrieval and display of the rows is complete, the script calls its internal routine sql_pgm_end to disconnect from the database and drop the Rexx/SQL functions. This terminates the database connection and releases resources (memory).

Example — Select and Update Table Rows

We've created a database table, inserted rows, and viewed the rows. Time to update the data.

This simple script updates the phone numbers. Its do loop prompts the user to enter a person's name. If the person exists in the table, the program prompts for a phone number, and updates that person's phone number in the phonedir table. If the person does not exist in the table, the script displays a "not found" message and prompts for the next person to update. The script ends when the user enters the character string EXIT.

Here is the script:

```
/* PHONE DIRECTORY UPDATE:
/*
   Updates rows in the phone directory w/ new phone numbers. */
signal on syntax /* capture SQL syntax errors */
call sql_initialize
                             /* load all Rexx/SQL functions*/
if SQLConnect(,,,'mysql') <> 0 then call sqlerr 'On connect'
if SQLCommand(u1, "use test") <> 0 then call sqlerr 'On use'
say "Enter name or 'EXIT':" /* prompt for person for whom */
pull lname .
                         /* we'll update the phone
do while (lname <> 'EXIT')
  /* retrieve the phone number for the person to update
                                                         */
  sqlstr = 'select phone from phonedir where lname ="' ,
     || lname || '"'
  if (SQLCommand(s1, sqlstr) \iff 0) then call sqlerr 'On select'
  /* if we retrieved one row, we retrieved the person given
  /* go ahead and update that person's phone # in the database */
  if sqlca.rowcount <> 1 then
```

Much of the code of this program is similar to what we've seen in previous examples. Among the new statements, this is the select statement that tries to retrieve the phone number of the person the user enters:

If the variable sqlca.rowcount is not 1 after this call, we know that we did not retrieve a row for the name. The person (as entered by the user) does not exist in the table:

```
if sqlca.rowcount <> 1 then
    say 'This person is not in the database:' lname
```

The script assumes that each person's name is unique, so the statement will either retrieve 0 or 1 rows. Of course, in a real database environment, some unique identifier or *key* other than the person's name would likely be used.

If we do retrieve a row, this code prompts the user to enter the person's new phone number and updates the database:

After the SQL update statement, the program commits any changes made to apply them permanently to the database through the SqlCommit function:

```
if SQLCommit() <> 0 then call sqlerr 'On commit'
```

Example — Cursor Processing

In the programs thus far, we've relied on a very useful feature of the Rexx/SQL interface: the ability to execute any SQL statement in one function call. The Rexx/SQL SqlCommand function lets scripts issue either data definition or data manipulation statements, including select's. The Rexx/SQL interface does not limit which SQL statements are allowed, unlike some call-level database interfaces.

Some interfaces do not allow SQL select statements that return more than one row to be run through a single statement. If a select statement returns more than one row, it requires *cursor processing*. A *cursor* is a structure that allows processing multiple-row result sets, one row at a time.

These are the major steps in processing multi-row results sets using a cursor:

- A SqlPrepare statement prepares the cursor for use. This allocates a work area and "compiles" the select statement associated with the cursor.
- **2.** The SqlOpen function opens the cursor.
- **3.** A program do loop retrieves rows from the cursor, one by one, through the SqlFetch function.
- **4.** When done, the script closes the cursor by a SqlClose, and deallocates the work area by a SqlDispose call.

Figure 15-2 illustrates this process pictorially.

Database Cursor Processing SQLPrepare Prepare the cursor for use **SQLOpen** Open the cursor No Row to process? Yes SQLFetch Fetch the row **SQLClose** Close the cursor, **SQLDispose** Release resources Figure 15-2

245

This script implements the logic of cursor processing:

```
/* PHONE DIRECTORY LIST2:
/*
/*
     Displays the phone directory's contents using a cursor.
signal on syntax
                              /* capture SQL syntax errors */
call sql_initialize
                              /* load all Rexx/SQL functions*/
if SQLConnect(,,,'mysql') <> 0 then call sqlerr 'On connect'
if SQLCommand(u1, "use test") <> 0 then call sqlerr 'On use'
sqlstr = 'select * from phonedir order by lname'
if SQLPrepare(s1, sqlstr) <> 0 then call sqlerr 'On prepare'
if SQLOpen(s1) <> 0 then call sqlerr 'On open'
/* this loop displays all rows from the SELECT statement
                                                           * /
do while SQLFetch(s1) > 0
   say 'Name: ' s1.lname 'Phone: ' s1.phone
if SQLClose(s1) <> 0 then call sqlerr 'On close'
if SQLDispose(s1) <> 0 then call sqlerr 'On dispose'
call sql_pgm_end
                               /* disconnect, drop functions */
exit 0
```

In this program, the SqlPrepare function allocates memory and internal data structures and readies the SQL statement (here a select) for subsequent execution:

```
sqlstr = 'select * from phonedir order by lname'
if SQLPrepare(s1,sqlstr) <> 0 then call sqlerr 'On prepare'
```

Next, open the cursor by a SqlOpen statement. Cursors must always be explicitly opened, as this next statement shows. In this respect, cursors are not like Rexx files, which are automatically opened for use:

```
if SQLOpen(s1) <> 0 then call sqlerr 'On open'
```

Once the cursor is open, fetch and display rows from the cursor, one at a time, by using the SqlFetch call. This do loop shows how individual rows may be processed, one after another:

```
do while SQLFetch(s1) > 0
    say 'Name:' s1.lname 'Phone:' s1.phone
end
```

After all the rows have been processed, end by closing the cursor and freeing any resources. Use the SqlClose and SqlDispose functions for this:

```
if SQLClose(s1) <> 0 then call sqlerr 'On close'
if SQLDispose(s1) <> 0 then call sqlerr 'On dispose'
```

Statement preparation can be used for other SQL statements besides select. While this approach may seem more cumbersome, it offers a performance benefit if the script executes the SQL statement more than once. This is because the SqlPrepare function places SQL statement compilation into a separate step. Executing the SQL statement is then a separate, more efficient, repeatable step. If you prepare a SQL statement one time, then execute it repeatedly, this multi-step approach yields better performance.

SQL insert, update and delete statements can also be prepared in advance. Use the SqlExecute function after the SqlPrepare function to execute the SQL insert, update or delete statement. End the process by SqlDispose. Use the same sequence of statements for data definition statements: SqlPrepare, SqlExecute, SqlDispose. (One DDL statement, describe, requires this sequence: SqlPrepare, SqlDescribe, SqlDispose).

Rexx/SQL gives you the choice whether to opt for convenience with the single-statement processing of the SqlCommand function, or to go for performance with SqlPrepare and SqlExecute. The trade-off between the two approaches is one of coding convenience and simplicity versus optimal performance.

Bind Variables

Structured Query Language, or SQL, permits the kinds of database queries illustrated by the sample programs above. But if SQL statements were always hardcoded, the language would not offer the programmability or flexibility scripts require. Bind variables provide the required flexibility. *Bind variables* are placeholders within SQL statements that allow scripts to dynamically substitute values into the SQL statement.

Here's an example. In the phone directory update script, we prompted the user to enter a person's name; then we retrieved the phone number based on that name. We then dynamically concatenated that person's name into the SQL select statement the script issued. The statements worked fine but the dynamic concatenation made for some complex syntax. Here's a simpler way to write the same statements using a *parameter marker* or *placeholder variable* that represents the bind variable

```
sqlstr = 'select phone from phonedir where lname = ? '
if (SQLCommand(s1,sqlstr,lname) <> 0) then call sqlerr 'On select'
```

The question mark (?) is the placeholder variable. The SqlCommand function includes an extra parameter that supplies a value that will be dynamically substituted in place of the placeholder variable prior to SQL statement execution. In this example, the value of lname will replace the placeholder variable before execution.

Bind variables can be a more efficient way to process SQL statements. They also are a little easier or cleaner to code. Rexx/SQL fully supports them. But different DBMSs have different syntax for parameter markers and so this feature is necessarily database-dependent. We eschewed programming with bind variables in this chapter for this reason.

Working with Other Databases

SQL is an ANSI-standard language, and the Rexx/SQL interface follows standard API conventions for relational databases. This limits the differences in scripts that access different DBMSs. The changes you must make to point a script at one DBMS versus another when using Rexx/SQL are minimal. Usually, you need only change the SqlConnect statement.

The Rexx/SQL documentation at the Rexx/SQL SourceForge project at http://rexxsql.sourceforge.net/doc/index.html includes a series of appendices, one for each DBMS the product supports. Read these appendices for DBMS-specific information. These appendices explain the minimal differences between database targets when using Rexx/SQL.

The one statement that does change when targeting different databases is SqlConnect. Database connections are inherently DBMS-specific. The next three brief sections describe the basic rules for encoding SQLConnect statements to access Oracle-, DB2 UDB-, and ODBC-compliant databases. The ODBC drivers, as explained earlier in this chapter, permit scripts to access almost any database, because ODBC is widely implemented as a universal interface for database access. You would use the ODBC drivers when connecting to Microsoft SQL Server databases, for example.

Connecting to Oracle

Here's how to connect to Oracle databases using the Rexx/SQL package. When connecting to Oracle databases via the SQLConnect function, all SqlConnect parameters are optional. Here are some sample connections. To connect to a database running on the local machine with an externally dentified userid and password:

```
rc = sqlconnect()
```

To connect to a local database with the default userid of scott with its default password of tiger:

Now let's connect scott to a remote database on machine prod.world (as identified in Oracle's SQL*Net configuration files):

```
rc = sqlconnect('MYCON','scott','tiger',,'PROD.WORLD')
```

Connecting to DB2 UDB

This section describes how to connect to IBM's DB2 Universal database, better known as DB2 UDB. The DB2 UDB native interface uses the CLI provided by IBM Corporation.

The *database name* parameter is required for a DB2 connection. Here are some sample connections. To connect to the SAMPLE database and name the connection MYCON, encode this:

```
rc = sqlconnect('MYCON',,,'SAMPLE')
```

Interfacing to Relational Databases

To connect as CODER with the password of TOPGUN, you would code a statement like this:

```
rc = sqlconnect(,'CODER','TOPGUN','SAMPLE')
```

The Db2 UDB database fully supports bind variables. Db2 bind variables are denoted by the standard marker, the question mark (?).

Connecting using ODBC

The Open Database Connectivity, or ODBC, standard is a generalized interface that is supported by a very broad range of relational databases. Use the ODBC driver for data access if Rexx/SQL does not support a direct or native driver for your database. The ODBC driver was long popular for connecting to Microsoft's SQL Server database.

In making the ODBC connection, the *userid*, *password*, and *database name* arguments are required on the SqlConnect function. Here is an sample connection:

```
rc = sqlconnect('MYCON','scott','tiger','REXXSQL')
```

The connection is named MYCON and the login occurs using userid scott and its password tiger. The fourth argument is the ODBC Data Source Name, or DSN. Under Windows systems, this is created using the Window's ODBC Data Sources Administration tool. The DSN in the preceding sample statement is named REXXSQL.

Connecting to MySQL

MySQL is one of the most popular open source database in the world. Like Rexx itself, it is freely downloadable and highly functional. As a result, it has become very popular as a fully featured, low cost alternative to expensive commercial database management systems.

When connecting to MySQL databases, the *database name* is the only required parameter on SqlConnect. The sample programs in this chapter all connected to a MySQL database named test. These two statements from those sample scripts illustrate the connection in the SQLConnect function, and the selection of the MySQL test database in the second statement:

```
if SQLConnect(,,,'mysql') <> 0 then call sqlerr 'On connect'
if SQLCommand(u1,"use test") <> 0 then call sqlerr 'On use'
```

One way in which MySQL differs from many other database management systems is that only certain kinds of MySQL tables support transactions. The SqlCommit and SqlRollback functions only provide transactional control against tables that specifically support transactions. So, you must use the proper kind of table to write transactional programs. Another difference of which you should be aware is that MySQL does not support bind variables.

Other database differences

Beyond the SqlConnect statement, what other aspects of Rexx/SQL will be coded differently according to which DBMS you use? Bind variables are one area. Bind variables allow you to dynamically place variables into SQL statements. The syntax for the placeholders varies between DBMSs.

Chapter 15

The SqlDefault and SqlDescribe functions operate slightly differently under various databases. The SqlVariable and SqlGetInfo functions return slightly different information for different databases.

Finally, the way in which SQL statements themselves are encoded will sometimes vary. This is due to the databases themselves, not because of the Rexx/SQL interface. While most DBMSs support various ANSI SQL standards, most also support keywords and features beyond the standards. Oracle is an example. Oracle SQL is one of the most powerful database languages, but it achieves this power at some cost in standardization. Be aware of variants from SQL standards if retargeting Rexx/SQL scripts toward different DBMSs.

Other Database Interfaces

This chapter focuses on Rexx/SQL because it is the most popular open-source database interface and because it accesses all important DBMSs. Other Rexx database interfaces are also available.

One example is IBM's commercial interfaces for its DB2 Universal Database (DB2 UDB). DB2 UDB runs on a variety of operating systems including Linux, Unix, Windows, and mainframes. The mainframe product has a different code base than that sold for Linux, Unix, and Windows. Writing Rexx-to-DB2 scripts on the mainframe is popular because scripting offers an easy way to customize database management activities. Rexx is an easier language to program with than the alternatives in tailoring and managing the database environment.

This discussion focuses on DB2 UDB for Linux, Unix, and Windows (LUW). We discuss the LUW product because more readers will likely have access to one of these operating systems than a mainframe platform. But the Rexx scripting for data manipulation language, or DML, statements we present here for DB2 UDB under LUW is essentially the same as you would code when using mainframe DB2.

As opposed to a generic database interface like Rexx/SQL, the IBM Rexx / DB2 interfaces give much greater control over DB2 UDB, including all its administrative functions and utilities. The downside is that the Rexx/DB2 interfaces are DB2-specific. They are nonportable and come bundled with a purchased commercial database. They only operate against DB2 databases, whereas Rexx/SQL operates on nearly any relational database.

Among IBM's programming interfaces for managing and controlling DB2 UDB databases, the Rexx/DB2 interfaces are easier to program than the alternatives (those for compiled languages like C/C++, COBOL, or FORTRAN). They bring the power and productivity of Rexx scripting to the administration and management of DB2 UDB. Check IBM's interface documentation to see which Rexx interpreters their interfaces currently support.

Let's take a look at the Rexx/DB2 package. Three Rexx/DB2 interfaces come bundled with DB2 UDB for Linux, Unix, and Windows:

DB2 UDB Interface	Use
SQLEXEC	The SQL interface. Use this to access databases and issue SQL statements. This interface supports the kinds of SQL processing illustrated in this chapter with Rexx/SQL, for example, DML statements, cursor processing, and parameter markers.
SQLDB2	An interface to DB2's <i>command-line processor</i> (CLP). Use it to run any of the hundreds of commands the CLP supports, including those for attach, connect, backup, restore, utilities, an the like.
SQLDBS	An interface to DB2's <i>Administrative APIs</i> . Use this to script administrative tasks for DB2 databases.

These three interfaces give Rexx scripts complete control over DB2 UDB. Not only can you program DML and DDL statements, but you can also script database administration, utilities, configuration changes, and the like. Rexx scripts can even run database stored procedures on most platforms.

The Rexx statements that access the Rexx/DB2 interfaces vary slightly by operating system. Under Windows, for example, Rexx scripts use the SAA standards to register and load these three DB2 interfaces. This is the same standard for access to external functions illustrated previously with Rexx/SQL. For example, these statements set up the three DB2 interfaces for use within a Windows Rexx script:

Once access to the DB2 interfaces has been established, scripts can connect to databases and issue SQL calls. Here is an example of how to embed SQL statements in scripts using the SQLEXEC interface. This code sequence updates one or more rows in a table by issuing the DML update statement:

```
statement = "UPDATE STAFF SET JOB = 'Clerk' WHERE JOB = 'Mgr'"
CALL SQLEXEC 'EXECUTE IMMEDIATE :statement'
IF ( SQLCA.SQLCODE < 0) THEN
    SAY 'Update Error: SQLCODE = ' SQLCA.SQLCODE</pre>
```

This example builds a SQL update statement in a variable named statement. It immediately executes the statement by the SQLEXEC function. The *host variable* named statement, identified by its preceding colon (:), contains the SQL statement to execute. The script checks the return code in special variable SQLCA. SQLCODE to see whether the SQL statement succeeded or failed. As in the Rexx/SQL interface, the Rexx/DB2 interface sets a number of variables that pass status information back to the script through the SQLCA.

Chapter 15

In this example, note the use of uppercase for Rexx and SQL statements, and lowercase for literals and other parts of the code. This is the informal "standard" to which Rexx scripts often adhere in IBM environments and in mainframe programming. It's a popular way of coding that serves to identify different parts of the code. Of course, since Rexx is not case-sensitive, you can use whatever case or mix of case you feel comfortable with or find most readable. The only exception is the data itself (in character string literals within Rexx scripts and character data residing in the database). These are case-sensitive.

Here's another coding example. These statements show how to set up cursor processing using the SQLEXEC interface:

```
prep_string = "SELECT TABNAME FROM SYSCAT.TABLES WHERE TABSCHEMA = ?"
CALL SQLEXEC 'PREPARE S1 FROM :prep_string';
CALL SQLEXEC 'DECLARE C1 CURSOR FOR S1';
CALL SQLEXEC 'OPEN C1 USING :schema name';
```

This time the script builds the SQL statement in the variable named prep_string. The question mark (?) is a parameter marker or placeholder variable for which values will be substituted.

The SELECT statement is dynamically prepared. The SQLEXEC interface first PREPARES the SELECT; then it DECLARES and OPENs the cursor. After executing the preceding code, a FETCH loop would then process each row returned in the result set, and a CLOSE statement would end the use of the cursor.

One issue in cursor processing is how to detect null values. Null values are data elements whose values have not been set. Whether a column can contain nulls depends on the column and table definitions, and also whether any column values have not been loaded or inserted. To detect null values, the Rexx/DB2 interface uses *indicator variables*. The keyword INDICATOR denotes them, as in this example:

```
CALL SQLEXEC 'FETCH C1 INTO :cm INDICATOR :cmind'
IF ( cmind < 0 )
    SAY 'Commission is NULL'</pre>
```

If the indicator variable cmind is set to a negative value by the interface, then the column variable cm is null. A null variable indicates that a column entry has not yet been assigned a value in the database.

Calls to the Rexx/DB2 SQLDB2 and SQLDBS interfaces are coded like those we've discussed in illustrating the SQLEXEC preceding interface. Here are the generic templates for invoking the SQLEXEC, SQLDB2, and SQLDBS interfaces. Each names the interface, then follows it with a SQL statement or command string representing the function desired in the call:

```
CALL SQLDB2 'command string'

CALL SQLDBS 'command string'
```

These three code examples appear in the IBM manual, *IBM Db2 UDB Application Development Guide*. This and all other Db2 manuals can be freely accessed or downloaded from the online IBM Publications Center, as described in Appendix A.

You can see from the code examples in this section that coding the Rexx/DB2 interface is slightly different from coding SQL calls with the Rexx/SQL package. Nonetheless, if you know one of these two interfaces, it is quite easy to learn the other. The principles that underlie how to code data manipulation and data definition statements are the same in both products.

Summary

This chapter overviews of the features of the Rexx/SQL interface in accessing relational databases. Rexx/SQL is an open-source product that accesses almost any type of SQL database.

The examples showed how quick and convenient Rexx/SQL coding is. It allows single-statement execution of SQL statements, including select's and DDL. Yet it also supports statement preparation, bind variables, auto-commits, and all the other features programmers might want in their call-level database interface.

We discussed five sample scripts that use the Rexx/SQL interface. The first illustrated the basic mechanisms of creating and terminating database connections. It also retrieved and displayed database version and release information. The second script showed how to create and load a database table. Two scripts showed how to read all the rows of a table. The first used Rexx/SQL's "array" notation to refer to individual table rows, while the second illustrated the more standard but cumbersome approach called cursor processing. An update script showed how to retrieve and update individual rows within a table. It also illustrated the value of explicitly committing data from within a script.

We also took a quick look at IBM's proprietary Rexx/DB2 interfaces. These exemplify the kinds of database-specific programming and administration possible in Rexx scripts. Scripting these tasks is much more productive than using traditional compiled programming languages. While we did not walk through complete sample scripts illustrating the Rexx/DB2 interfaces, we discussed several code snippets that show how these interfaces are coded.

This chapter just touches upon the broad topic of database programming. Our purpose is to describe Rexx database scripting and to demonstrate its coding in a simple manner. If you need more information about database programming, please obtain one of the many books on that topic.

Test Your Understanding

- **1.** What are the key advantages to the Rexx/SQL interface? What are the advantages to using a DBMS in your scripts?
- **2.** What Rexx/SQL functions must every script start with?
- **3.** How to you initiate and terminate database connections? How can you check the status of a connection?
- **4.** Describe how you would write a single routine to process SQL errors. What are the advantages to such a routine? What SQLCA variables are set by the interface, and what do they tell your script?

Chapter 15

- **5.** SQL statement syntax is complex. Tell how you can code to quickly identify and reduce syntax errors.
- **6.** What is the purpose of the SqlDispose function? How does it differ from SqlDisconnect?
- **7.** Compare the use of Rexx/SQL to the bundled Rexx/DB2 interfaces for scripting with DB2 UDB. What are the advantages of each toolset?

Graphical User Interfaces

Overview

This chapter explores *graphical user interface*, or *GUI* packages. It gives you an overview of the major packages, explains when to use each, and explores how to design scripts that use them.

GUI development is a detail-oriented process and scripts that create and manage GUIs typically require many lines of code. We cannot cover all the ins and outs of GUI programming in a single chapter. GUI programming is a study in its own right. It means learning the many functions, parameters and attributes involved in windows programming. Our goals here are to describe the different GUI interfaces available to Rexx programmers and offer guidance on the advantages and drawbacks of each. We also give you an idea of the structure and design of typical GUI-based scripts. The sample scripts are quite basic, yet studying them should equip you to move into more serious GUI scripting.

As a universal scripting language, Rexx runs on every imaginable platform. One advantage of this versatility is that several GUI packages interface with Rexx. These include Rexx/Tk, Rexx/DW, Rexx Dialog, ooDialog, RexxGTK, Dr. Dialog, VX*Rexx, and VisPro/REXX. The downside to this variety is that no single GUI interface has established itself as the de facto standard for Rexx developers.

In this chapter, we'll first briefly characterize the major GUIs available for Rexx scripting. For each, we'll mention some of its advantages and uses, and we'll list the environments in which it runs or is typically used. These brief product profiles orient you to which interface product might be most appropriate for your own applications. Following these short product profiles, we'll look at three packages in greater detail: Rexx/Tk, Rexx/DW, and Rexx/gd. The first two packages aid in scripting Rexx GUIs, while the latter is for creating graphical images. We've selected these three packages for detailed, coding-level coverage for specific reasons. All three are:

Open-source products that are freely downloadable
Popular, widely used, and well proven
Run across the major operating systems families

Let's start with the brief sketches of the major GUI interfaces.

Rexx/Tk

Rexx/Tk allows Rexx scripts to use the Tk, or "ToolKit," GUI popularized by the Tcl/Tk scripting language. This package enables the development of portable, cross-platform GUIs. Tk supports all important *widgets* or window elements. Its dozens of functions categorized as Menus, Labels, Text, Scrollbars, Listboxes, Buttons, Text Entry, Sliders, Frames, Canvas, Window Design, Event Handlers, and Convenience functions.

To use Rexx/Tk, you must install both it and the Tcl/Tk scripting language. Your Rexx scripts invoke Rexx/Tk external functions, which then run their corresponding Tcl/Tk commands. The names and purposes of the Rexx/Tk functions are similar to their corresponding Tk commands, so if you know one, you know the other.

The advantage to Rexx/Tk is that Tk is one of the most widely used cross-platform GUI toolkit in the world. It runs on all major platforms. Tk became popular because it makes the complex, detail-oriented process of creating GUIs relatively easy. Sharing Rexx's goal of ease-of-use makes Tk a nice fit for Rexx scripting. Those who already know the Tk interface experience little learning curve with Rexx/Tk. You could read a Tcl/Tk book to learn Rexx/Tk. Plenty of documentation and tutorials are available.

The downside to Rexx/Tk is that it requires Tcl/Tk on your system and has the performance penalty associated with a two-layer interface. If problems arise, you could find yourself dealing with two levels of software — the Rexx/Tk interface with its functions, and the corresponding Tcl/Tk commands.

Rexx/Tk is open-source software distributed under the *GNU Library General Public License*, or *GNU LGPL*. Information on Rexx/Tk and downloads are http://rexxtk.sourceforge.net/index.html.

We discuss Rexx/Tk in more detail later in this chapter.

Rexx/DW

This GUI package is based on *Dynamic Windows*, or *DW*, a lightweight GUI framework modeled on the GTK toolkit of Unix and Linux (GTK is also known as *GTK*+ and the *Gimp Toolkit*). GTK is open source under the GNU LGPL license. With Rexx scripts, Rexx/DW presently runs under the Windows, Linux, Unix, and OS/2-derived environments.

Widgets are the basic display items placed on GUI windows. The Dynamic Windows package supports a wide variety of widgets, including: Entryfield or Editbox, Multiline Entryfield or Editbox, Combobox, Button, Radio Button, Spin Button, Checkbox, Container or Listview, Treeview, Splitbar, Bitmap/Pixmap/Image, Popup and Pulldown Menus, Notebook, Slider, Percent or Progress meter, Listbox, Render/Drawing Area, Scrollbar, and Text or Status Bar.

Rexx/DW differs slightly from the Dynamic Windows framework in that it offers a few special functions beyond what DW contains, while it lacks a few others DW has. So, while Rexx/DW closely follows Dynamic Windows' functionality, it is not an exact match.

The main advantage to Rexx/DW is that it is a lightweight interface. Compared to Rexx/Tk, Rexx/DW provides a cross-platform GUI, while eliminating the overhead of Tcl/Tk that Rexx/Tk requires. Rexx/DW addresses the performance concerns that sometimes arise when programming GUI interfaces. Sometimes it's simpler not to have the Tcl/Tk system installed on the computer and involved as an intermediate software layer.

Rexx/DW is a newer project than Rexx/Tk. Programmers who compare the two may wish to compare the level of ongoing effort behind the two projects when deciding which to use. An easy way to do this is to access the Web pages for the respective products at SourceForge.net.

Rexx/DW is open-source software distributed under the GNU LGPL. Information on Rexx/DW and downloads are at http://rexxdw.sourceforge.net/. The GTK+ project homepage is located at www.gtk.org/.

We discuss Rexx/DW in more detail later in this chapter.

Rexx Dialog

This GUI is specifically designed for Windows operating systems with either the Reginald or Regina Rexx interpreters. Reginald is a Rexx interpreter based upon Regina, and was extended and enhanced with Windows-specific functions. It specifically targets Windows platforms. (Reginald is currently out of support.) Rexx Dialog is the component added to support the typical kinds of GUI interactions users expect from Windows-based applications. It optimizes the GUI for Windows. Where portability is not a concern, Rexx Dialog brings Windows "power programming" to Rexx developers.

Chapter 23 covers Reginald and its Windows-oriented features. That chapter provides further information on Rexx Dialog and its functions, as well as information on where to download the package. It also offers examples of a few of Reginald's Windows-oriented functions.

ooDialog and RexxGTK for ooRexx

You access the downloads for the Open Object Rexx (or ooRexx) project at its SourceForge home page of https://sourceforge.net/projects/oorexx/. When you do, you'll see downloads for two different GUI interfaces you can use with ooRexx: ooDialog and RexxGTK.

ooDialog is a windows and dialog management tool for building GUIs with ooRexx running under Windows. It gives easy access to the underlying Windows API through an extensive library of classes and methods.

RexxGTK is an ooRexx class library that provides access to the cross-platform GTK graphical interface available on most mainstream operating systems (eg, Linux, Unix, BSD, Windows, Mac). You must have the GTK+ libraries installed to use it. This provides an extensive set of free and open source classes and methods for developing GUI applications. RexxGTK is designed for use with ooRexx and does not work with other Rexx interpreters.

Dr. Dialog, VX*Rexx, VisPro Rexx

These interfaces were popular under OS/2 and have faded along with OS/2. The latter two were commercial. Searching under the names of any of these products in a common Internet search engine like Google provides more information on them if you need it.

Rexx/Tk

Now that we've profiled the major GUI interface packages, let's explore three of the most popular in greater detail. We start with Rexx/Tk, a popular, portable interface modeled on the Tk interface popularized by the Tcl/Tk scripting language.

Rexx/Tk is an external function library that provides Rexx scripts interface to the Tcl/Tk command language. Rexx/Tk has well over 100 functions. Each directly corresponds to a Tcl/Tk GUI command. The Rexx/Tk documentation maps the Tcl/Tk graphics commands to their equivalent Rexx/Tk functions. This means that you can learn Rexx/Tk programming from Tcl/Tk graphics books. Or, to put it another way, to program in Rexx/Tk you must know something about Tcl/Tk GUI programming.

Rexx/Tk includes another 50 plus "extensions," extra functions that map onto Tcl code that is dynamically loaded during Tcl programming. This provides all the GUI facilities Tcl/Tk programmers have access to, whether or not those functions are dynamically loaded.

The Rexx/Tk function names correspond to their Tcl/Tk equivalents. For example, Tk's menu command becomes TkMenu in the Rexx library; menu post becomes TkMenuPost. This makes it easy to follow the mapping between the Tcl/Tk command and Rexx/Tk functions.

Tcl/Tk is case-sensitive. Quoted commands or widgets must be typed in the proper case. The special return code tkrc is set by any Rexx/Tk function. tkrc is 0 when a function succeeds, negative on error, or a positive number for a warning. The TkError function makes available the full text of any error message.

Appendix G lists all the Rexx/Tk functions and extensions and their definitions. It gives you the complete overview of the functions provided with the product.

Downloading and installing

First you must download and install Tcl/Tk on your system. Searching on Google provides a list of several download sites. Among them are ActiveState at www.activestate.com/Products/ActiveTcl. The website provides the product along with documentation and set up information. Downloads come in both source and binary distributions for all major platforms. Tcl/Tk is free software. Read the license that downloads with the product for terms of use.

Under Windows we did nothing more than download the *.zip file, decompress it, and run the installer program. For first time users of Rexx/Tk, we recommend the "default install" of Tcl/Tk to avoid any problems.

After installing Tcl/Tk, be sure to run one or more of its "demo" programs. These reside in a subdirectory to the product directory and have the extension *.tcl. Running a demo program ensures that your installation succeeded.

The next step is to download and install the Rexx/Tk package. Rexx/Tk can be freely downloaded from SourceForge.net. The Rexx/Tk Web page documents the package at http://rexxtk.sourceforge.net/. The Web page includes a link to download the product, or go to http://sourceforge.net and enter keywords Rexx/Tk into the search panel.

The product is available in source and binaries for various platforms. After downloading and decompressing the appropriate file, read the README and the setup.html files that describe product installation. You must set environmental variables and the PATH to reflect the product and library location. To use the external function library, your scripts must be able to load the Windows DLL named rexxtk.dll or the Linux or Unix shared library file named libraxxtk*.

Rexx/Tk is an external function library, as is Rexx/DW. Either is usable from any Rexx interpreter that supports standard access to external functions. Both are always tested with the Regina interpreter, so if you experience problems that appear to be interpreter-related, verify your install by testing with Regina.

Basic script design

Rexx/Tk scripts are *event-driven*, or activated by user interaction with the top-level window and its widgets, so scripts share a common structure. The logic of their main routine or driver is typically:

- **1.** Register and load the Rexx/Tk external function library.
- 2. Create the top-level or main window, including all its widgets. Display the main window to the user.
- **3.** Enter a loop which manages user actions on the widgets.
- **4.** Specific routines are invoked within your script depending on user actions (mouse-clicks and inputs).
- **5.** The script terminates when the user exits the top-level window.

Figure 16-1 diagrams this logic.

Build & display main window User action is Exit? No Handle user interaction Drop Rexx/Tk function library and exit

Figure 16-1

259

A simple example

Let's review a very simple sample script. We've kept it minimal so that you can see the basic script structure. The goal here is not to explore Tk widgets, of which there is a very full universe. It is simply to orient you to the typical design of Rexx/Tk scripts.

The script was developed under Microsoft's Windows operating system, but Rexx/Tk's portability means it could have been developed for several other operating systems, including Linux and Unix, as well.

All the sample script does is display a small GUI window with a menu bar. The sole option on the menu bar in the window is labeled File. When the user clicks on File, a drop-down menu appears. It contains three items labeled Open ..., Dir..., and Quit. So the drop-down menu structure is:

```
File
Open...
Dir...
Quit
```

If the user selects Open..., the standard Windows panel for File Selection appears. The user selects a file to "open," and the script simply confirms the user's selection by displaying that filename in a Message Box. The user clicks the Ok button in the Message Box and returns to view the original window.

Similarly, if the user selects Dir..., the standard Windows dialog for Directory Selection appears. After the user picks a directory, the script displays the directory name in a Message Box to confirm the user's selection. The user clicks the Ok button in the Message Box and returns to the original window.

If the user selects Quit, a Message Box asks him or her Are You Sure? with Yes and No buttons below this question. Selecting the No button takes the user back to the original window and its menu bar. Clicking Yes makes the window disappear and the script ends.

Here's the main routine or driver of the script:

The first line of the script uses the SAA function RxFuncAdd to register the function TkLoadFuncs, which will be used to load the Rexx/Tk library:

```
call RxFuncAdd 'TkLoadFuncs','rexxtk','TkLoadFuncs'
```

The key parameter is the second one, rexxtk, which matches the filename for the external library. In Windows, for example, the file's name would be rexxtk.dll. Under Linux, Unix, or BSD, the parameter identifies the shared library file.

The installation of the Rexx/Tk library ensures that the Rexx interpreter can find this library through the proper environmental variable. If this line fails in your script, review the install README* files for how to set the environmental variables Rexx requires to locate external libraries.

Once the RxFuncAdd function has registered the TkLoadFuncs function, execute TkLoadFuncs to load the entire external library. Now all the Rexx/Tk functions are available for the use of this script:

```
if TkLoadFuncs() <> 0 then say 'ERROR- Cannot load Rexx/Tk library!'
```

This example assumes that we're using the Regina Rexx interpreter, which bases its access to external function libraries on the SAA standard. Other Rexx interpreters that follow the SAA interface standards to external libraries would use the same code as this script. Some Rexx interpreters accomplish access to external function libraries in a different manner.

Now the script creates a top-level window:

```
call top_window /* create and display the main window */
```

The code in the top_window internal subroutine can establish all sorts of widgets (or controls) and attach them to the topmost window. We'll look at the code of the subroutine in a moment. The point here is that the script creates and then displays a window with which the user will interact.

Having displayed its initial window, this code is the basic loop by which the script waits for user interaction with the widgets or controls on the top-level window:

The script ends when the user selects the action to end it from the top-level window. The following code should therefore never be reached, but just in case, always drop the Rexx/Tk functions and code an exit instruction to end the main routine:

That's all there is to the main routine. Pretty simple! The real work in most GUI scripts is in the definition of the widgets or controls and the development of the routines that handle the events prompted by user interaction with those controls.

Here's the internal subroutine that creates the top-level window and all its widgets:

```
top_window: /* create/display top-level window **************/

menubar = TkMenu('.m1') /* make a menubar for the top window */

/* create drop-down menu, add it to the top-level menubar */

filemenu = TkMenu('.m1.file','-tearoff', 0) /* create drop menu */

call TkAdd menubar, 'cascade', '-label', 'File', '-menu', filemenu

/* now add items to the File menu */

call TkAdd filemenu, 'command', '-label', 'Open...', '-rexx', 'getfile'

call TkAdd filemenu, 'command', '-label', 'Dir...', '-rexx', 'getdirectory'

call TkAdd filemenu, 'command', '-label', 'Quit' , '-rexx', 'exit_window'

call TkConfig '.', '-menu', menubar /* attach menubar to window */

return /* end of routine TOP_WINDOW */
```

The first line creates a menu bar for the top-level window. In Tk, the topmost window is denoted by a period (.), and all widgets on that window derive their name from this. This line creates the menu bar we have named .ml for the topmost window:

```
menubar = TkMenu('.m1') /* make a menubar for the top window */
```

After creating the menu bar, the script can create a drop-down menu to attach to it. These two lines create the drop-down menu at the far left side of the menu bar in the main window. The invocation of the TkAdd function attaches the drop-down menu to the menu bar:

With the drop-down menu in place, the script needs to add items to this menu. Three more calls to TkAdd add the three items in the drop-down menu:

```
call TkAdd filemenu, 'command', '-label', 'Open...', '-rexx', 'getfile'
call TkAdd filemenu, 'command', '-label', 'Dir...', '-rexx', 'getdirectory'
call TkAdd filemenu, 'command', '-label', 'Quit' , '-rexx', 'exit_window'
```

A single call to the TkConfig function completes the set up by attaching the menubar to the window:

```
call TkConfig '.', '-menu', menubar /* attach menubar to window */
```

The routine has completed its task of building the top-level window and its widgets. It ends with a return instruction.

Now we need to create three routines, one for each of three actions the user can select from the drop-down menu. The TkAdd functions above show that the labels the user will view for these three actions are Open..., Dir..., and Quit. Those lines also show that the corresponding routines we need to create for the three actions must have the names of getfile, getdirectory, and exit_window. So the

TkAdd function associates the label the user selects with a routine in the script that will be run when he or she selects the label from the drop-down list.

Here is the code for the <code>getfile</code> routine, the routine that displays the typical Windows panel from which users select filenames (the Windows' File Selection panel). The <code>TkMessageBox</code> call displays back the filename the user selects in a Message Box and allows the user to exit back to the main window by pressing the <code>Ok</code> button:

The TkGetOpenFile function sets up the Window's File Selection dialog. You can see the power of a widget or Windows control here: a single line of code presents and manages the entire user interaction with the File Selection dialog.

The code to implement the directory selection routine is nearly the same as that for the routine above, except that a Windows-style Directory Selection panel appears instead of a File Selection panel. Once again, the TkMessageBox call echoes the user's choice back to him or her inside a Message Box. The user acknowledges the Message Box and continues interaction with the script by clicking on the message ok displayed inside that Message Box:

Lastly, here is the code that executes if the user selects option Quit from the drop down menu. It displays a Message Box that asks Are You Sure? If the user pushes the No button, he or she again sees the top-level window because of the return instruction in the code below. If he presses the Yes button, he exits the script and its window. This executes the TkDropFuncs function below, which drops the Rexx/Tk function library from memory and further use by the program:

```
exit_window: /* exits top-level window-END!******************

if TkMessageBox('-message','Are you sure?','-title', ,
    'Quit?','-type','yesno','-icon','warning') = 'no' then Return

call TkDropFuncs /* drop the library functions */

exit 0 /* end of script */
```

Chapter 16

This sample script is very minimal. It just displays a small window with a drop-down menu and manages user interaction with the window and its menu selections. Nevertheless, the script does illustrate the basic structure of GUI scripts and how they manage user interaction. You could take this "skeletal script" and expand it into a much more robust and complex window manager.

Your next steps

The sample script shows that most GUI scripts have the same basic structure. The logic of the driver is simple. It is in the nearly 200 functions to create and define widgets in which complexity lies. And in writing the procedural logic to animate the actions the user selects by interacting with the controls. Learning the function library and how to program all the widgets or controls are the challenge.

Start by perusing the sample scripts shipped with Rexx/Tk. You can learn a lot from them. And consider learning more about the Tcl/Tk commands that underlie Rexx/Tk. Two good sources of information are the Tcl/Tk Developer's home page, listed earlier, and any of several popular books on how to program the Tcl/Tk GUI. Among those books are *Graphical Applications with Tcl and Tk* by Eric F. Johnson (M&T Books, ISBN: 1-55851-569-0) and *Tcl/Tk in a Nutshell* by Raines and Tranter (O'Reilly, ISBN: 1-56592-433-9). You can find many other books on the Tk toolkit by searching online at www.amazon.com or www.barnesandnoble.com.

Rexx/DW

Rexx/DW offers an alternative GUI toolkit to that of Rexx/Tk. Rexx/DW's main advantage is that it is a lightweight interface, offering potential performance improvements over Rexx/Tk.

Rexx/DW provides external functions that enable Rexx scripts to create and manage GUIs through Netlabs.org's *Dynamic Windows*, or *dwindows*, package. Rexx/DW scripts define *widgets*, elements placed in windows, such as check boxes, radio buttons, and the like. Widgets are assembled into the window layout by a process called *packing*. Internal subroutines you write called *event handlers* or *callbacks* are associated with particular actions the user takes on the widgets.

Scripts typically present a window or screen panel to the user and wait for the user to initiate actions on the widgets that activate the callback routines. Interaction continues as long as the user selects an action from the window. At a certain point, the user closes the window. This ends interaction and terminates the program.

Components

To set various layout and behavioral *attributes*, Rexx/DW has about 30 *constants*. Each constant has a default and can be set by the script to some other value to change behavior.

Rexx/DW contains over 175 functions. These categorize into these self-descriptive groupings:

ProcessControl
Dialog
CallbackManagement

Browsing
ColourSupport
ModuleSupport
MutexSupport
EventSupport
ThreadSupport
PointerPosition
Utility
PackageManagement

Rexx/DW supports 17 different callbacks or events that scripts can be programmed to handle.

Downloading and Installing Rexx/DW

Like Rexx/Tk, Rexx/DW can be freely downloaded from SourceForge.net. The Rexx/DW Web page documents the package at http://rexxdw.sourceforge.net/. The Web page includes a link to download the product, or go to http://sourceforge.net and enter keywords Rexx/DW into the search panel.

Download either compressed source or binaries for your operating system. The installation follows the typical pattern for open-source software. If you downloaded binaries, after decompression all you must do is set environmental variables and the PATH to reflect the product and library location. To use the external function library, your scripts must be able to load the Windows DLL named rexxdw.dll or the Unix/Linux/BSD shared library file named something similar to librexxdw*. The README* file that downloads with the product gives installation instructions and details on how to set environmental variables.

Basic script design

Rexx/DW scripts are *event-driven*, activated by user interaction with the top-level window and its widgets. Their logical structure is similar to that of Rexx/Tk scripts and those developed with other prominent GUI packages. The basic outline of user-driven interaction provided in Figure 16-1 applies to Rexx/DW programming as well (except that Rexx/DW functions are used in place of Rexx/Tk functions).

The basic structure of the typical Rexx/DW script is:

1. Register and load the Rexx/DW external function library. Use code such as this:

```
call RxFuncAdd 'DW_LoadFuncs', 'rexxdw', 'DW_LoadFuncs'
if DW_LoadFuncs() <> 0 then say 'ERROR-- Unable to load Rexx/DW library!'
```

The first line uses the SAA-based function in Regina Rexx named RxFuncAdd to register the DW_LoadFuncs external function. It resides in the external library named named by the second parameter, rexxdw .

Chapter 16

In Windows, rexxdw refers to the file rexxdw.dll. In Linux or Unix, it refers to the root part of the name of the shared library file. In either case, the proper environmental variable must be set to indicate the location of this file for the RxFuncAdd call to succeed. The second line invokes the DW LoadFuncs function to load the rest of the DW external library.

- 2. Initialize the dynamic windows interface by invoking the Rexx/DW dw_init function. Initialize various attributes in the constants to set interface behaviors and defaults.
- 3. Create the topmost panel or window. This screen may consist of a set of packed widgets, each having various attributes and behaviors. Events are mapped into *callbacks* or event-handling routines for the various actions the user might take on the window, based on the widgets it contains. This mapping is achieved through the function <code>dw_signal_connect</code> and potentially other <code>CallbackManagement</code> functions. When all is ready, the script displays the top-level window to the user.

Now the script driver runs an endless loop that receives actions from the user. Depending on the capabilities of the Rexx interpreter, this loop might use either of the functions <code>dw_main</code> or <code>dw_main_iteration</code>. This loop is similar to that of the <code>TkWait</code> function loop in Rexx/Tk.

4. The user ends interaction with the script by closing its top-level window.

In summary, you can see that the skeletal logic of Rexx/DW programs is the same as the sample Rexx/Tk script we discussed earlier in the chapter. So, scripting Rexx/DW interfaces is rather similar to scripting Rexx/Tk. The difference is that you use Rexx/DW functions to bring the logic to life. The real work in Rexx/DW scripting is in writing the callback routines to handle user interaction with the widgets on the window.

Your next steps

As with other forms of GUI programming, the program logic of Rexx/DW scripts is straightforward. The trick lies in learning the many attributes and functions the package contains. This powerful package contains some 175 functions!

Fortunately, Rexx/DW comes with complete documentation and sample scripts. Use these as models with which to get started. Take the sample scripts, look them over until you understand them, then copy them and adapt them to your own needs. This will get you up and running quickly.

Graphical Images with Rexx/gd

Rexx/gd is an external function library designed for the creation and manipulation of graphical images. It is not intended for the creation, manipulation and control of GUIs in the same manner as are Rexx/Tk and Rexx/DW. Rather, it creates images stored in *.gif, *.png, and *.jpg files. These could be displayed within a GUI or Web page, for example, but the emphasis is on graphic images, not on controlling user interaction through a GUI.

Rexx/gd draws complete graphic images with lines, arcs, text, color, and fonts. Images may be cut and pasted from other images. The images that are created are written to PNG, GIF, JPEG, or JPG files.

Rexx/gd is based on *GD*, an open-source, ANSI C-language library. Rexx/gd is essentially a wrapper that gives Rexx scripts access to the GD library code. To use Rexx/gd, you need to download and install the GD library to your machine. Then download and install Rexx/gd.

The GD library is available at libgd.github.io. Or enter the keywords gd library into any Internet search engine for a list of current download sites. Rexx/gd can be downloaded off the same master panel as Rexx/SQL and Rexx/DW at http://regina-rexx.sourceforge.net/ or more specifically http://rexxgd.sourceforge.net/index.html.

The logic of a Rexx/gd routine

Rexx/gd is embedded within all kinds of Rexx scripts and used in a wide variety of applications. But the logic of an internal routine that creates an image is predictable. Here is its basic structure:

1. Register and load the Rexx/gd library for use. Following the same style we used with Rexx/Tk and Rexx/DW, this code looks like this:

```
call RxFuncAdd 'GdLoadFuncs', 'rexxgd', 'GdLoadFuncs'
if GdLoadFuncs() <> 0 then say 'ERROR-- Unable to load Rexx/gd library!'
```

This code registers and loads the GD function library for use according to the standard approach of the SAA registration procedures for external function libraries.

- 2. Allocate a work area to develop an image in by invoking the gdImageCreate function.
- **3.** Assign background and foreground colors to the image by calling the gdImageColorAllocate function.
- **4.** Use one or more of the *drawing functions* to draw graphics in the image area. For example, to draw a line, call <code>gdImageLine</code>. To create a rectangle, invoke <code>gdImageRectangle</code> or <code>gdImageFilledRectangle</code>. The script might also invoke styling, brushing, tiling, filling, font, text, and color functions in creating the image.
- **5.** The script preserves the image it created in-memory by writing it to disk. Among useful externalization functions are gdImageJpeg, to write the image as a JPEG file, and gmImagePng, to store the image as a PNG file.
- **6.** End by releasing memory and destroying the in-memory image by a call to gdImageDestroy.

Figure 16-2 pictorially summarizes the logic of a typical Rexx/gd script.

Rexx/gd Graphics Scripting

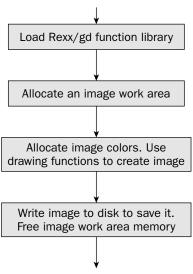


Figure 16-2

Rexx/gd provides over 75 functions. They are divided into these categories:

- ☐ Image creation, destruction, loading, and saving
- Drawing
- ☐ Query
- ☐ Font and text handling
- ☐ Color management
- ☐ Copying and resizing
- ☐ Miscellaneous

Rexx/gd can be combined with GUI tools like Rexx/Tk or Rexx/DW to create graphical user interfaces. It is also useful in building parts of Web pages. In fact, let's look at a sample script that does exactly that.

A sample program

This sample script draws the buttons that appear on a Web page. Each button contains one word of text. Figure 16-3 displays the Web page, which is the home page for Rexx/gd at SourceForge.net at http://rexxgd.sourceforge.net/index.html. The buttons created by the program appear down the left-hand side of the Web page. The script appears courtesy of its author, Mark Hessling, developer/maintainer of Regina Rexx as well as many other key open-source Rexx tools.

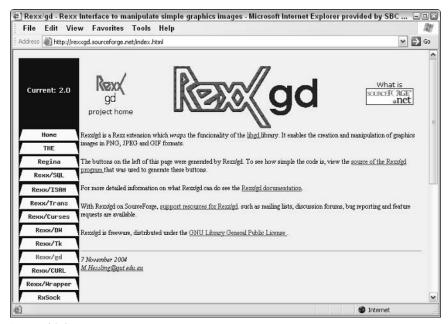


Figure 16-3

Here is the program. (A few lines in the program wrap around onto the next line due to the margin size.)

```
* This Rexx/gd script creates all of the buttons for my Web page
* /
Trace o
Call RxFuncAdd 'GdLoadFuncs', 'rexxgd', 'GdLoadFuncs'
Call GdLoadFuncs
text = 'Home Links Downloads Bug_Report Rexx/Tk Rexx/SQL Regina THE PDCurses
Rexx/Wrapper Documentation Rexx/ISAM Rexx/gd Rexx/Trans Rexx/Curses'
 * Find the maximum length of any of the button texts
* /
maxlen = 0
Do i = 1 To Words(text)
  if Length(Word(text,i)) > maxlen Then maxlen = Length(Word(text,i))
 * Image size is based on size of largest text
font = 'GDFONTMEDIUMBOLD'
x = ((1+GdFontGetWidth(font)) * maxlen) + 8
y = GdFontGetHeight(font) + 8
Say 'Image size: ' x 'x' y
Do i = 1 To Words(text)
   img = GdImageCreate( x, y )
```

```
* First color allocated is the background - white
   * /
   white = GdImageColorAllocate( img, 245, 255, 250 )
   background = GdImageColorAllocate( img, 0, 0, 102 )
   blue = GdImageColorAllocate( img, 0, 0, 255 )
   yellowgreen = GdImageColorAllocate( img, 73, 155, 0 )
   * Although most browsers can't handle transparent PNGs,
   * set the transparent index to the background anyway.
   call GdImageColorTransparent img, background
    * Determine text position - centered
   xoff = (GdImageGetWidth( img ) % 2 ) - (((Length(Word(text,i)) *
(GdFontGetWidth(font)))-1) % 2)
    ^{\star} Draw our borders for the fill of the top left and right corners.
   call GdImageLine img, 6, 0, 0, y-1, background
   call GdImageLine img, x-7, 0, x-1, y-1, background
   call GdImageFillToBorder img, 0,0, background, background
   call GdImageFillToBorder img, x-1,0, background, background
    * Write the string in blue, and save the image . . .
   call GdImageString img, font, xoff, 3, Translate(Word(text,i),' ','_'),
vellowgreen
   call GdImagePNG img, makename(Word(text,i),'green')
    ^{\star} . . . then overwrite the string in yellow-green, and write this image.
   call GdImageString img, font, xoff, 3, Translate(Word(text,i),' ','_'), blue
   call GdImagePNG img, makename(Word(text,i),'blue')
   call GdImageDestroy img
End
Return
makename: Procedure
Parse Arg text, color
text = Translate(text, 'abcdefghijklmnopgrstuvwxyz', 'ABCDEFGHIJKLMNOPQRSTUVWXYZ')
text = Changestr( '/', text, '' )
text = Changestr( '_', text, '' )
Return color | text'.png'
```

The logic of the script follows the straightforward steps listed in the preceding code. First, the script loads the gd function library:

```
Call RxFuncAdd 'GdLoadFuncs', 'rexxgd', 'GdLoadFuncs' Call GdLoadFuncs
```

The script next determines the size of the buttons, based on the size of the longest word that will be displayed within them. This is the code of the do loop and some code that calculates the image size.

Now the script is ready to invoke the Rexx/gd function GdImageCreate to allocate the image. The image will be developed in a work area in memory:

```
img = GdImageCreate( x, y )
```

The script issues several GdImageColorAllocate functions to set up colors for the image and its background:

```
/*
 * First color allocated is the background - white
 */
white = GdImageColorAllocate( img, 245, 255, 250 )
background = GdImageColorAllocate( img, 0, 0, 102 )
blue = GdImageColorAllocate( img, 0, 0, 255 )
yellowgreen = GdImageColorAllocate( img, 73, 155, 0 )
```

Now, the script draws the borders of the buttons with this code:

```
call GdImageLine img, 6, 0, 0, y-1, background call GdImageLine img, x-7, 0, x-1, y-1, background call GdImageFillToBorder img, 0,0, background, background call GdImageFillToBorder img, x-1,0, background, background
```

These statements write the image in blue and yellow-green, and save it to PNG files:

```
/*
    * Write the string in blue, and save the image . . .
    */
call GdImageString img, font, xoff, 3, Translate(Word(text,i),' ','_'), yellowgreen
call GdImagePNG img, makename(Word(text,i),'green')

/*
    * . . . then overwrite the string in yellowgreen, and write this image.
    */
call GdImageString img, font, xoff, 3, Translate(Word(text,i),' ','_'), blue
call GdImagePNG img, makename(Word(text,i),'blue')
```

Now that the image has been allocated, developed, and saved to a file, the script can exit. Before terminating, the program destroys the allocated image and releases its memory with this statement:

```
call GdImageDestroy img
```

This script illustrates the straightforward logic of most Rexx/gd programs. As with Rexx/Tk and Rexx/DW, this logic is simple; the trick is in learning the details of the many available functions and how to combine them to meet your needs.

The graphical images created with Rexx/gd can be used for a variety of purposes. As shown by this program, the images can be combined with other logic to create sophisticated Web page designs.

Summary

This chapter describes the most popular GUI interface packages for Rexx scripting. It discusses Rexx/Tk, Rexx/DW, and Rexx/gd in detail. These are all open-source products that are widely used and well proven. New releases are tested with Regina and the products work with other Rexx interpreters as well.

We explored the basics of GUI programming at a very high level, showing the essential nature of event-driven programming. We presented a Rexx/Tk script, albeit a very simple one. Then we looked at Rexx/DW scripting. These scripts follow the same basic event-driven logic as the Rexx/Tk program, but of course use the functions of the Rexx/DW library.

GUI programming is necessarily detail oriented, and scripts tend to be lengthy, even if they are logically rather straightforward. If you are not an experienced GUI developer, this is the challenge you face. Rexx provides all the requisite tools.

Finally, we investigated Rexx/gd and how it can be used for creating graphic images. We looked at the Web page for the product and related the graphics on that Web page to the script that created them. Rexx/gd is a generic graphical image tool that can be combined with other Rexx interfaces and tools to create the graphical components of Web pages or for many other uses.

Test Your Understanding

- **1.** What are the essential differences between Rexx/Tk and Rexx/DW? What are the advantages to each?
- **2.** When would you use Rexx Dialog? For which operating system was it designed and customized?
- **3.** What's a widget? How are widgets associated with top-level windows in Rexx/Tk versus Rexx/DW?
- **4.** What is the basic logic of the driver in most GUI scripts? What are the differences between Rexx/Tk and Rexx/DW scripts in this regard?
- **5.** Why has the Tcl/Tk GUI toolkit become so popular?
- **6.** Does Rexx/gd create GUIs? How could it be used with Web pages? Where does Rexx/gd create its images?

Web Programming with CGI and Apache

Overview

Rexx is well-suited to Web programming because it excels at string manipulation. Web programming requires reading and interpreting string input and creating textual output. As in the next chapter on XML, the emphasis is on string processing. Rexx string processing strengths recommend it as a highly productive, easy-to-maintain language for Web programming.

There are many ways to program Web servers and build Web pages with Rexx. Two popular technologies are the *Common Gateway Interface*, or *CGI*, and Apache's *Mod_Rexx* interface.

First, we describe some of the tools available for CGI programming. CGI was one of the first popular Web server interfaces because it is easy to use and fully programmable.

Then we describe scripting Apache through its Rexx interface, Mod_Rexx. Apache is the world's most popular Web server. Mod_Rexx gives you complete scripting control over Apache. With it you can efficiently and effectively serve Web pages created by Rexx scripts. You can also dynamically create Web pages through a feature called *Rexx Server Pages*, or *RSP. Dynamic Web pages* are created and tailored in real time to meet user needs.

Common Gateway Interface

The *Common Gateway Interface*, or *CGI* specification lets Web servers execute user programs to produce Web pages containing text, graphics, forms, audio, and other information. The CGI interface allows Rexx scripts to control and drive the Web server in its provisioning of Web pages to the user's browser. Several free external function libraries are available to support CGI programming in Rexx.

The cgi-lib.rxx library

The Stanford Linear Accelerator Laboratory, or SLAC, created a library of CGI programming functions called *cgi-lib.rxx*. Its two dozen functions are designed to simplify Rexx/CGI programming. It also includes a tutorial and sample scripts. Download the SLAC scripts and tools from the Downloads page at www.RexxInfo.org. Or search for the keywords Rexx CGI in any Web search engine.

To give you an idea of what this library contains, here is a quick list of its functions. The package itself includes both the technical descriptions and full Rexx source code for these functions.

Function	Use
cleanquery	Removes unassigned variables from CGI query string
cgierror	Reports the error message and returns
cgidie	Reports the error message and "dies" or exits
chkpwd	Verifies username and password
delquery	Removes an item from CGI query string
deweb	Converts ASCII hex code to ASCII characters
formatdate	Converts date expression to Oracle format
fullurl	Returns complete CGI query URL
getowner	Returns a file's owner
getfullhost	Returns fully qualified domain name of the local host
htmlbreak	Breaks a long line into lines for HTML parsing
htmlbot	Inserts standard information ("boiler plate") at page end
htmltop	Inserts title and header at page top
httab	Converts tab-delimited file into HTML table
methget	Returns TRUE if the Form uses METHOD="GET"
methpost	Returns TRUE if the Form uses METHOD="POST"
myurl	Adds the script's URL to the page
oraenv	Establishes SLAC's Oracle/Rexx environment
printheader	Inserts the Content-type header
printvariables	Adds the Form's name-value variable pairs to the page
readform	Reads a Form's GET or POST input and returns it decoded
readpost	Reads a Form's standard input with METHOD="POST"

Function	Use	
slacfnok	Identifies a file's visibility	
striphtml	Removes HTML markup from a string	
suspect	Returns an error message if an input string contains a suspect character	
webify	Encodes special characters as ASCII hex	
wraplines	Breaks long lines appropriately for terminal output	

The cgi-lib.rxx package comes with several sample scripts. Here's a simple one that illustrates several of the functions. It simply reads form input from the user and echoes it to a Web page. It appears here courtesy of its author Les Cottrell and the SLAC:

In this script, this first line accesses the cgi-lib.rxx package:

```
F=PUTENV("REXXPATH=/afs/slac/www/slac/www/tool/cgi-rexx")
```

The line is coded for *uni-REXX*, a commercial Rexx interpreter from The Workstation Group (see Chapter 19 for information on uni-Rexx and other major commercial Rexx interpreters). Your statement for library access would be coded differently if you use a different Rexx interpreter. For example, using Regina and most other interpreters you could code this statement with the value built-in function. The first parameter in the statement below is the symbol to change, the second is the value to set it to, and the third is the variable pool in which to make the change. The result is to update the environmental variable properly for access to the function library:

```
call value 'REXXPATH','/afs/slac/www/slac/www/tool/cgi-rexx','ENVIRONMENT'
```

The cgi-lib.rxx package provides full source code for the functions, so you can set them up however you need to as an external library for your version of Rexx. Or, use them as internal routines.

Next, the script writes the *Content Type header* by the PrintHeader function. The content type header must be the first statement written to the browser. It tells the browser the kind of data it will receive in subsequent statements:

```
SAY PrintHeader(); SAY '<body bgcolor="FFFFFF">
```

The next line reads the input form with the ReadForm function:

```
Input=ReadForm()
```

If there is no input, the script writes a minimal HTML page using the HTMLTop function. The HTMLTop function inserts a title and header at the top of a Web page:

If there was form input, the script echoes it back to the user by the PrintVariables function. The PrintVariables function adds the form's name-value variable pairs to the Web page:

The program ends by writing a standard footer to the Web page with the HTMLBot function:

```
SAY HTMLBot()
```

You can see that developing Rexx scripts that interface to CGI is just a matter of following CGI rules regarding how input is read into the script and written to the interface. CGI scripts typically read user forms input, perform some processing, and write textual output that defines the Web page the user sees in response. A library of functions like those provided by the cgi-lib.rxx package makes the whole process easier. They offer convenience and higher productivity than manually coding everything yourself.

In concluding, we mention that this Rexx/CGI function library is also the basis for the CGI interface package offered with the Reginald Rexx interpreter. See Chapter 23 further information on Reginald and for example Reginald scripts.

The Internet/REXX HHNS WorkBench

The CGI / Rexx library function package described in the above section helps you develop scripts that interact with the Common Gateway Interface. Using it reduces the level of effort required in writing CGI programs. Another free external library of Web programming functions is downloadable from Henri Henault & Sons, Paris, France. It too, is designed for Web server programming through controlling the Common Gateway Interface.

The purposes of this package are to help you:

- ☐ Quickly create dynamic Web pages, tables and forms
- ☐ Easily handle forms results
- ☐ Run Rexx-CGI scripts without change across the supported platforms

The Internet/REXX HHNS WorkBench consists about 40 functions. This function library comes with about a dozen sample programs. English documentation and the library are available at the Henri Henault & Sons Web site at www.hhns.fr/fr/real_cri.html.

The library runs under Windows, Linux, and IBM's AIX operating systems. It is tested with the Regina, IBM Object REXX, and NetRexx interpreters. It supports two Web servers: Microsoft's Internet Information Services (or IIS) and the Apache open-source Web server.

Setting up the product requires several steps:

- **1.** Download and install the product.
- **2.** Ensure PATH or environmental variables point to the product's shared library.
- **3.** Configure either IIS or Apache.
- **4.** If you're using NetRexx, ensure you have installed a servlet container engine (such as JServ or Tomcat).

The product documentation describes these steps in detail.

To give an idea of what the library contains, here are its functions and their uses (all functions are described in full detail in the product documentation):

Function	Use
delay	Wait (in seconds and milleseconds)
inkey	Keyboard scan
getkwd	Parse a keyword parameter list
getenv	Return the value of an environmental variable
getpid	Returns the current process ID
getwparm	Returns a parameter value from an *.ini file
filesize	Returns file size
parsefid	Parses a Windows/DOS/Unix/Linux filename
popen	Issues an operating system command
cgiIinit	Initializes, sets up CGI header
cgiSetup	Initializes CGI, sets up Rexx variables only

Table continued on following page

Function	Use
CgiEnd	Ends CGI script
CgiWebit	Processes nonalphanumeric characters in a string
TblHdr	Generates a table header
TblRow	Generates a table row
FrmHdr	Generates a <form action="tag</td"></form>
FrmInp	Generates an INPUT tag within a form
CgiImg	Generates an tag
CgiHref	Generates a hypertext link
r4Sh	Unescape a string
CgiRefr	Goes to another URL
GetCookie	Extracts a value from the current cookie
Tags	Generates a pair of tags

Beyond the Web programming functions, the package includes other useful functions. The following table shows that they are divided into three categories: mathematical functions, CMS-like functions, and date functions:

Function Group	Purpose	Functions	
Mathematical	These functions support advanced or transcendental mathematics.	atan, atan2, cos, sqrt, exp, fact, log, pow, sin	
CMS	These functions support conversion between filenames and variables and stems.	stm2file, stm2var, file2stm, var2stm, makefid	
Date	These functions convert between Julian day numbers and dates	d2date, date2d	

Let's take a look at a sample program using this package. This script writes a Web page that lists program names and their descriptions. The programs it lists are the sample scripts that come with the Internet/REXX HHNS WorkBench. The output of this program can be viewed at the product Web site, www.hhns.fr/fr/real_cri.html, and is also depicted in Figure 17-1. The script appears here courtesy of Henri Henault & Sons.

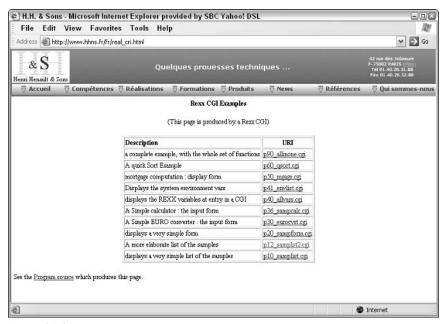


Figure 17-1

Here's the program:

```
#! /usr/local/bin/regina
/* A more elaborate list of the samples
call setdll /* loads the HHNS shared lib */
call CgiInit "TITLE='Another List of samples' BGCOLOR=FFFFFF"
say "<center><h4>Rexx CGI Examples</h4></center>"
say "<center>(This page is produced by a Rexx CGI)</center>"
if left(translate(webos), 3) = "WIN" then
    call popen "Dir /b /o p*.cgi"
else call popen "ls -1 p*.cgi"
/* the above 3 statements may be replaced by :
    call popen webdir "*.cgi"
say "<center>"
say ""
say tblHdr("Description", " URI")
do queued()
    /*--- get the next program name ---*/
```

```
parse pull z
   /*--- assume that 2nd line of the program is its brief description --*/
   call linein z; desc = linein(z); call lineout z
   parse var desc '/*' desc '*/'
   /*--- Now, write a table Row with the description and the Web link ---*/
   say tblRow(strip(desc), cgiHref(z, z))

end

say ''
say '</tenter>'
say "See the "cgiHref("r00_showsrc.cgi?p12_samplst2.cgi", "Program source")
   "which produces this page."

call cgiEnd
   return 0
```

The program starts by accessing the shared function library by its first statement:

```
call setdll /* loads the HHNS shared lib */
```

Then it initializes by invoking the CgiInit function to write the page title:

```
call CgiInit "TITLE='Another List of samples' BGCOLOR=FFFFFF"
say "<center><h4>Rexx CGI Examples</h4></center>"
say "<center>(This page is produced by a Rexx CGI)</center>"
```

The next several lines get the list of program names (filenames) to place into the list of programs in the table on the Web page. This code first determines whether the operating system is Windows or a version of Unix; then it uses the popen function to issue either a dir or 1s command to get the directory listing into the stack. This is a good example of how scripts can be written to operate across platforms through OS-aware programming:

```
if left(translate(webos), 3) = "WIN" then
    call popen "Dir /b /o p*.cgi"
else call popen "ls -1 p*.cgi"
/* the above 3 statements may be replaced by :
    call popen webdir "*.cgi"
*/
```

Now, the program writes the table header, using the tdlHdr function:

```
say "<center>"
say ""
say tblHdr("Description", " URI")
```

Web Programming with CGI and Apache

Next, the program executes a do loop to read each program name from the stack. For each one it retrieves, it uses the tblRow function to write a row into the tabular listing. Each line in the output listing contains the program name, followed by the URL hyperlink to its code. The link is produced by the cgiHref function:

```
/*--- Now, write a table Row with the description and the Web link -- */ say tblRow(strip(desc), cgiHref(z, z))
```

After it has created the table of program names and hyperlinks to their corresponding scripts, the program closes the table:

```
say ''
say '</center>'
```

The program concludes by writing a message with a URL link by the cgiHref function. Then it terminates by invoking cgiEnd:

```
say "See the "cgiHref("r00_showsrc.cgi?p12_samplst2.cgi", "Program source")
"which produces this page."
call cgiEnd
```

The Internet/REXX HHNS WorkBench makes CGI programming easier because you can leverage its set of Web-programming-specific functions for higher productivity. The scripting example employs only a small number of the package's functions, yet you can see how these functions make for a higher-level, more powerful script.

There are many more coding examples at the HHNS Web page at www.hhns.fr/fr/real cri.html. You can run the examples at the Web site and view their Web page output while viewing the code simultaneously in another browser panel. This makes it very easy to learn how to use this package.

Programming Apache with Mod_Rexx

The Apache Web server is the most widely used host system on the Internet. Its open source download includes several *language processor modules*. These are designed to allow developers to process any part of an Apache request including the creation of Web pages. The modules are available for Rexx, Perl, and other languages, with names like mod_rexx, mod_perl, and mod_php, respectively. Each module has the same capabilities but supports a different scripting language.

The Apache Web server directly executes your Rexx scripts through its Mod_Rexx interface. Apache offers a more efficient way of writing Web server code than the Common Gateway Interface. Web server *extensions* like CGI typically suffer from performance overhead because they spawn separate processes to handle new requests. The Apache server handles new requests by executing within a new thread, rather than spawning a new process. Threads are a more efficient mechanism than processes on most operating systems. This also means that Mod_Rexx requires a *thread-safe interpreter*. Examples of thread-safe Rexx interpreters include Regina and Open Object Rexx.

Mod_Rexx gives Rexx developers full control over all aspects of the processing of Apache server requests. The product comes in two flavors. One is a traditional, function-based interface, while the other is an object-oriented interface. The procedural interface contains roughly 50 functions, all of which start with the letters www. The object-oriented interface consists of three classes and their accompanying 40-odd methods. This chapter focuses on the function-based interface.

Functions and special variables

Mod_Rexx is very complete and handles almost any requirement. To give you an idea of what's included, let's briefly discuss the functions for the traditional, function-based interface, and their uses. The functions are grouped into four categories:

<i>General Functions</i> — This set of functions provides a base level of services necessary to work with the Apache Web server. They manage cookies and the error log, retrieve environmental information, and handle URLs.
<i>Apache Request Record Functions</i> — These functions provide information about and manage the request record pointer, information coming into the script from Apache and the Web.
<i>Updatable Apache Request Record Functions</i> — These functions manage the request record pointer and allow updating values as well as retrieving them.
<i>Apache Server Record Functions</i> — These functions manage server-side concerns pertaining to Apache and its environment.

Appendix J lists all the functions in the Mod_Rexx package along with descriptions of their use.

Mod_Rexx uses a set of three dozen *special variables* to communicate information to Rexx scripts. The names of these variables all begin with the letters www. These special variables are set either before the script starts, or after the script executes a function call. Their purpose is to communicate information to the script either about the environment or the results of function calls. The sample program we discuss later creates a Web page and displays the values of these variables. Appendix J contains a complete list of all the Mod_Rexx special variables.

Installation

 $Mod_Rexx\ is\ distributed\ with\ Apache.\ Download\ Apache\ from\ www.apache.org.\ Or,\ obtain\ Mod_Rexx\ by\ separate\ download\ from\ SourceForge\ at$

http://sourceforge.net/projects/modrexx.

Mod_Rexx is distributed under the Common Public License. The license agreement downloads with the product. Be sure to read it and agree to its terms before using the product. Mod_Rexx runs under Windows, Linux, and BSD. It is tested with the Regina and Open Object Rexx interpreters.

Installing Mod_Rexx is similar to installing the Rexx interfaces described in the last few chapters. Be sure that the Mod_Rexx shared library named mod_rexx.dll or mod_rexx.so is present and that it can be located through the PATH or the proper shared-library environmental variable. The installation instructions explain this in detail.

One additional step is required: configuring the Apache Web server to execute your Rexx scripts. To configure Apache, just edit its configuration file and restart the server for the changes to take effect. Apache's configuration file is typically named http.conf and is located in the Apache conf (configuration) directory. You must add lines to this file that:

- ☐ Load the Mod_Rexx module.
- ☐ Ensure that scripts with file extensions *.rex and *.rexx are processed by Mod_Rexx.
- Optionally define *Rexx Server Page*, or *RSP*, support.

The lines you add to the Apache configuration file should look similar to these:

```
# The following line needs to be added to the end of the appropriate
# httpd.conf LoadModule list.
#
LoadModule rexx_module modules/mod_rexx.dll

# The following lines should be added at the end of the http.conf file.
#
AddType application/x-httpd-rexx-script .rex .rexx
AddType application/x-httpd-rexx-rsp .rsp

# Add these for REXX Server Page support
#
RexxTempFileNameTemplate "c:/temp/execrsp?????.rex"
RexxRspCompiler "c:/Program Files/Apache Group/Apache2/bin/rspcomp.rex"
```

After reconfiguring this file, shut down and restart the Apache Web server so that the new directives take effect.

To test the install, start your browser and enter this line into its "address entry box:"

```
http://your.domain.com/test.rex
```

Replace the text your.domain.com with the name of your own server. This test runs a Rexx test script under Mod_Rexx and displays a simple Hypertext Markup Language (HTML) page.

Should you have any difficulty, Mod_Rexx comes with documentation that covers both installation and the relevant Apache directives. The documentation also gives complete information on the Mod_Rexx function library, the alternative object-oriented interface, special Rexx variables, and how to use Rexx Server Pages.

A sample script

Let's discuss how to write scripts that manage Apache through the Mod_Rexx interface. First, we'll describe the kinds of processing these scripts can perform; then we'll look at an sample program. The sample script reads input from a user of the Web server, and writes a Web page to his or her browser in response. It is a typical program in that it serves Web pages.

You can write scripts that take control from Apache at any point in its request processing. These are the processing phases during which your script might run:

- **1.** Request
- 2. Post-read request
- 3. URI translation
- 4. Header parser
- **5.** Access control
- 6. Authentication
- 7. Authorization
- **8.** MIME type check
- **9.** Fixup
- **10.** Response
- **11.** Logging
- 12. Cleanup
- **13.** Wait
- **14.** Post-read request

Most scripts are *response handlers* — they run during the Response phase of Step 10. Response handlers receive the user's input and write a Web page to his or her browser in response.

This scripting example is a response handler. The script creates a Web page that displays the value of the Mod_Rexx special variables. Appendix J lists the Mod_Rexx special variables. Each has a name that starts with the letters www. This script is one of the sample scripts distributed with the Mod_Rexx package. Here is the script:

```
say "<h1>Sample HTML Page From Rexx</h1>"
say 'The Mod_Rexx version string is "'WWWGetVersion()'"'
say "The following is the list of standard Rexx CGI variables and their values:"
say 'NameValue'
say "WWWAUTH_TYPE"vorb(wwwauth_type)""
say "WWWCONTENT_LENGTH"vorb(wwwcontent_length)"
say "WWWCONTENT_TYPE"vorb(wwwcontent_type)""
say "WWWGATEWAY_INTERFACE"vorb(wwwgateway_interface)""
say "WWWHTTP_USER_ACCEPT"vorb(wwwhttp_user_accept)""
say "WWWHTTP_USER_AGENT"vorb(wwwhttp_user_agent)""
say "WWWPATH_TRANSLATED"vorb(wwwpath_translated)""
say "WWWREQUEST_METHOD"vorb(wwwrequest_method)"""
say "WWWSERVER_SOFTWARE"vorb(wwwserver_software)"
say ""
say "The following are some additional variables provided to the Rexx program:"
say 'NameValue'
say "WWWIS_MAIN_REQUEST"vorb(wwwis_main_request)""
say "WWWRSPCOMPILER"vorb(wwwrspcompiler)"
say "WWWSERVER_ROOT"vorb(wwwserver_root)""
say "WWWUNPARSEDURI"vorb(wwwunparseduri)""
say "WWWURI"vorb(wwwuri)"""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""""
say ""
say "</body>"
say "</html>"
return OK
/* vorb: return the value or a required space */
if length(arg(1)) > 0 then return arg(1)
else return ' '
```

The first few lines in the script define two of the standard Apache return codes:

```
/* these are some typical Apache return codes */
DECLINED = -1    /* Module declines to handle */
OK = 0    /* Module has handled this stage. */
```

The next line gets the main argument Apache always passes to every Rexx script. It contains a *request record pointer* used as an argument in the coding of subsequent Mod_Rexx functions:

```
/* get the Apache request record ptr */
r = arg(1)
```

Using this pointer, we can assign a *content type* to the responses that will be sent to the browser. This tells the browser how to interpret the Web page information it will receive next:

```
/* set content-type and send the HTTP header */
call WWWSendHTTPHeader r, "text/html"
```

Then this required statement gets the query string arguments from Apache:

```
call WWWGetArgs r
```

Now, the program can start creating its response to the user. This means writing HTML text to the browser. All the Rexx script really has to do is issue say instructions to send appropriate text strings. It begins by writing the page header information:

```
/* start sending the html page */
say "<html>"
say "<head>"
say "<title>Sample HTML Page From Rexx</title>"
say "</head>"
say "<body>"
say "<h1>Sample HTML Page From Rexx</h1>"
```

The next line invokes the WWWGetVersion function to get the Mod_Rexx version under which the script is running. The script displays this information on the Web page:

```
say 'The Mod_Rexx version string is "'WWWGetVersion()'"'
```

Now, the program issues a long series of say instructions. We won't repeat them all here, but here are the first few say statements:

Each say instruction displays the value of a different Mod_Rexx special variable on the Web page. These variables all begin with the letters www.

The program ends by closing the HTML tags and sending a return code string of OK to the caller:

```
say ""
say "</body>"
say "</html>"
return OK
```

The code for a short internal function called vorb ends the program. This internal function is used in some of the say instructions to space output in a more attractive way.

That's all there is to it. Knowing just a few Mod_Rexx functions, you can take control of Apache to better customize Web pages and generate tailored output. This sample script shows how easy it is to get started. As your knowledge grows, the Mod_Rexx interface gives you the functions required to gain full scripting power over the Apache Web server.

Example — Rexx Server Pages

Rexx Server Pages, or *RSPs*, are similar to Java Server Pages or embedded PHP scripting. They allow you to embed Rexx code right into your HTML code. The benefit is that HTML pages can be dynamically created and altered at runtime. This customizes the Web page's response to the user.

To set up RSPs, you must configure Apache properly by giving it the appropriate directives and rebooting Apache. The install instructions above included the lines necessary to configure Apache to enable RSPs.

Just like server pages coded in other scripting languages, place your Rexx code directly within the HTML, and frame it between special markers. The delimiters must occur on their own line (without any other code). They identify the start and end points of Rexx code within the HTML. There are two kinds of delimiters: short and long. Use either within the HTML to identify your Rexx code:

Delimiter Type	Starts With	Ends With
short-form markers	rexx</td <td>?></td>	?>
long-form markers	<script type="rexx"></td><td></script>	

Here is a sample RSP coded with *short delimiters* that show where the Rexx code starts and ends:

```
The current date and time is
<?rexx
/* the following is a REXX statement */
say date() time()
?>
```

You can see that the Rexx code is embedded between the markers <?rexx and ?>. This embedded code is simply standard Rexx. It enables programmability within the HTML code. The delimiter markers serve to identify the Rexx code and isolate it as opposed to native HTML code.

Here is the exact same example coded with *long delimiters*:

```
The current date and time is
<script type="rexx">
/* the following is a REXX statement */
say date() time()
</script>
```

As in the example using short delimiters, this example shows how you can embed Rexx code directly within your HTML code that defines Web pages.

When RSP-enabled code is referenced, Mod_Rexx takes these steps to run it:

- **1.** It creates a temporary file.
- 2. The RSP compiler compiles the RSP file into a Rexx program and places it in the temporary file.
- **3.** It runs the compiled Rexx program.
- **4.** It erases the temporary file.

Rexx Server Pages allow you to capitalize on your knowledge of Rexx in creating dynamic server pages. They present an alternative to coding in languages like Java Server Pages or PHP.

Further Information

For further information, visit the Mod_Rexx project pages hosted by SourceForge at http://sourceforge.net/projects/modrexx. The website www.RexxInfo.org has tutorials and background information on both Rexx with CGI and Mod_Rexx.

Summary

Two popular ways to script Web servers are CGI and the Mod_Rexx interface into Apache. This chapter describes both. Rexx scripts can manage almost any aspect of these popular Web server products, but most scripts run in response to a user request. These scripts serve Web pages to users.

We looked at three tools: the CGI/Rexx library from Stanford Linear Accelerator Laboratory, the Internet/REXX HHNS WorkBench from Henri Henault & Sons, and Apache's Mod_Rexx interface. The sample script for the first package read a user's form input and simply echoed it back to a Web page. It illustrates all the basics of CGI programming, and showed how the functions of the CGI/Rexx library simplify Web serving. The sample script for the second function library writes a Web page that includes a list of programs and their descriptions. It illustrates a little more advanced CGI programming, this time based on the package from Henri Henault & Sons. The final programming example uses Apache's Mod_Rexx interface. It serves a Web page that lists all of the Mod_Rexx package's special variables.

The sample programs were very brief and are intended to show how to get set up and started with these tools. For further information and complete documentation, visit the Web sites listed during the discussions where these tools can be freely obtained.

Web Programming with CGI and Apache

Test Your Understanding

- **1.** Could you write Rexx/CGI scripts without using any of the packages this chapter describes? What would be the downside to this?
- **2.** In the cgi-lib.rxx library, what functions do you use to write standard headers and footers on Web pages? What is a Content Type header and what function do you use to write it? What function(s) read user inputs?
- **3.** In the Internet/REXX HHNS WorkBench, what functions typically begin and end scripts? What function do you use to write the Content Type header? What function inserts a hyperlink into the output Web page?
- **4.** What is Mod_Rexx and what does it do? Does Mod_Rexx have all the same capabilities as mod_perl and mod_php? Compare Apache and Mod_Rexx to CGI. Which yields better Web server performance? Why?
- **5.** What are Rexx Server Pages? Why are they useful? How do you create them?
- **6.** What are short-form and long-form delimiters? Is there any functional difference between them?
- **7.** You need to customize Apache's log processing. How can this be accomplished?

XML and Other Interfaces

Overview

There are more free and open-source Rexx interfaces and tools than one book can possibly cover, so this book just introduces a few of the most popular. This chapter describes XML programming with a package called *RexxXML*. It tells how to write scripts that manipulate XML and HTML data files and how to accomplish other XML-related tasks.

To start, we'll define what XML is, and what related terms like XSLT, XPath, and HTML mean. Then we'll look at the kinds of processing you can accomplish using the RexxXML package. After that, we'll briefly discuss the functions in RexxXML, including those for document tree parsing, document tree searching, XSLT processing, and schema validation. After we discuss how to download and install RexxXML, we'll illustrate specific XML operations, such as how to load and process XML documents, how to validate documents, and how to process them against an XSLT stylesheet. With this background, we'll review a script that uses RexxXML to read a Web page, identify a specific data element within that Web page, and compare the value of the data element to the version of RexxXML used within the script. The script uses the Web page to determine if a more recent version of RexxXML is available than the user has installed.

The chapter concludes by mentioning many other free and open-source Rexx tools, packages, and interfaces. Most can be found on the Web and freely downloaded just by entering their name into any popular search engine. Or visit www.RexxInfo.org for a complete list and free downloads.

XML with RexxXML

Extensible Markup Language, or XML, is a data description language. XML files are text files that contain both data and descriptive tags for that data. XML files offer a self-explanatory way to store, transport, and communicate data. They are often used for standardized data interchange between different organizations or between different application systems within the same company.

XPath is a standard for identifying and extracting parts of XML documents. Extensible Stylesheet Language Transformations, or XSLT, applies definitional templates called stylesheets to XML files. XSLT separates data from the format in which it appears. Hypertext Markup Language, or HTML, is the language in which many Web pages are defined. It is a predecessor technology to XML and XSLT.

XML and its related technologies have become popular as a way to provide self-descriptive, self-validating data. They underlie the construction of the internet and data transfer between many organizations.

RexxXML is an external function library that supports common XML operations. Rexx scripts use it to parse, transform, analyze and generate XML files. RexxXML goes well beyond XML itself to support HTML, XML dialects, XPath, and XSLT.

RexxXML is built on top of libxml and libxslt. These two free products are part of the XML C parser and toolkit of the Gnome open-source project. Based on every imaginable XML-related standard (and there are quite a few of them!), these function libraries give programmers a full range of XML capabilities. RexxXML brings most of these functions to Rexx programmers.

RexxXML has a wide range of features. Here are a few of the things you can do with it:

Process XML, XML dialects, and HTML data from within Rexx scripts
Access documents through URLs or Rexx variables
Search and modify document contents
Extract data from within documents
Convert non-XML data into XML documents
Validate XML documents via Schemas
Scan Web pages (HTML files) and identify or extract information
Transform XML data via XSLT
Extend XSLT
Use arbitrary precision arithmetic in XSLT transformations
Use it as a macro language for an application based on libxml
Send data to an HTTP server and retrieve non-XML data from HTTP and FTP servers The RexxXML library contains roughly 50 functions. They can be categorized into these self-descriptive groups:
Housekeeping routines
Document tree parsing
Document tree searching
XSLT processing
Schema validation
Communications with HTTP and FTP servers
C-language interface

Here are the RexxXML functions along with brief descriptions (see the RexxXML documentation for more detailed code-oriented descriptions):

the l	sekeeping — The housekeeping functions load the RexxXML library for use by a script, delete library from memory when a script finishes using it, and returns version and error informato scripts:
	$\verb xmlLoadFuncs - Register RexxXML functions , initialize ML/XSLT libraries $
	$\verb xmlDropFuncs - Ends the use of RexxXML functions, frees library resources $
	${\tt xmlVersion} {\color{red}} \ Returns \ the \ version \ of \ the \ XML \ and \ XSLT \ libraries$
	xmlError — Returns error message text since the most recent call
	xmlFree — Releases object's memory
The	<i>ument Tree Parsing</i> — RexxXML uses the <i>document tree</i> as its underlying processing paradigm. functions in this group allow scripts to create or retrieve document trees, to perform various sing and update operations on them, and to save them to disk when done:
	${\tt xmlParseXML}$ — ${\tt Parses}$ XML data, returns 0 or a document tree
	xmlNewDoc — Creates a new, empty XML document tree
	${\tt xmlParseHTML-Parses}$ HTML data, returns 0 or a document tree
	xmlNewHTML — Creates a new HTML document tree
	xmlSaveDoc — Writes a document tree to a URL, or returns it as a string
	xmlFreeDoc — Frees a document tree
	${\tt xmlExpandNode}$ — ${\tt Puts\ data\ from\ node\ into\ a\ stem}$
	${\tt xmlNodeContent}$ — Returns the content of $node$ as a string
	${\tt xmlAddElement} - Creates \ a \ new \ element \ and \ adds \ it \ as \ a \ node$
	xmlAddAttribute — Creates a new attribute and adds it to a node
	${\tt xmlAddText} {\color{red} \leftarrow} Creates~a~text~node~and~adds~it~as~a~child~to~a~node$
	${\tt xmlAddPI-} Creates~a~processing~instruction~and~adds~it~as~a~child~to~a~node$
	$\verb xmlAddComment - Creates a comment and adds it as a child to a node $
	$\verb xmlAddNode - Creates a new node and adds it as a child of another node $
	xmlCopyNode — Creates a new node as a copy of another
	$\verb xmlRemoveAttribute Removes attribute(s) from a node $
	$\verb xmlRemoveContent Removes children of node(s) $
	xmlRemoveNode — Removes node(s) from a document tree

ing	ument Tree Searching — These functions are specifically concerned with parsing and analyz-document trees. They give scripts the ability to inspect documents and better understand r contents, without having to program these operations explicitly or at length in scripts:
	$\verb xmlEvalExpression-Evalutes XP ath expression and returns result as a string$
	${\tt xmlFindNode} \color{red} - Evaluates \ XPath \ expression \ and \ returns \ result \ as \ a \ nodeset$
	xmlNodesetCount — Returns number of nodes in a nodeset
	xmlNodesetItem—Returns specified node from a nodeset
	$\verb xmlCompileExpression-Converts an expression to a quick ("compiled") form$
	$\verb xmlFreeExpression - Frees a compiled expression $
	xmlNewContext — Allocates a new context
	xmlSetContext — Changes or sets the context node
	${\tt xmlFreeContext}$ — Frees the context(s)
	${\tt xmlNodesetAdd}$ — ${\tt Adds}$ specified nodes to a nodeset.
XSL	T Processing — These functions work with and apply XSLT stylesheets to documents:
	xmlParseXSLT—Parses and compiles an XSLT stylesheet
	$\verb xmlFreeStylesheet - Free compiled stylesheet(s) $
	${\tt xmlApplyStylesheetApplies\ the\ XSLT\ stylesheet\ to\ a\ document}$
	$\verb xmlOutputMethod Reports the output method of a style sheet \\$
	<i>ma Validation</i> — These functions automate the process of schema validation, that is, ensuring documents correctly match the specifications embodied in their related schemas:
	${\tt xmlParseSchema}$ — ${\tt Parses}$ a document schema
	$\verb xmlValidateDoc-Validates a document according to a style sheet \\$
	$\verb xmlFreeSchema - Frees schema document(s) $
	xmlDumpSchema — Writes schema(s) to a file (ususally for debugging)
HTT	TP and FTP — These two functions retrieve data from URLs:
	${\tt xmlPost} {\longleftarrow} Sends \ an \ HTTP \ {\tt post} \ command \ to \ a \ URL \ and \ returns \ result$
	xmlGet — Retrieves data from a URL
Rex	nguage Interface — These two functions implement the C-language interface for the xXML library. The function library can be used as a set of callable routines from C programs, rell as from with Rexx scripts:
	${\tt rexxXMLInit} - Registers \ the \ XML \ library \ and \ initializes$
	rexxXMLFini — Ends XML library usage, frees resources

Licensing, downloading, and installation

RexxXML runs under operating systems in the Windows, Linux, Unix, and OS/2 families. It is free software, distributed without charge or warranty, under the Mozilla Public License. The terms of the license are explained in the documentation that downloads with the product. As licensing terms sometimes change, be sure to read the license prior to using the product.

RexxXML is tested with the Regina Rexx interpreter. It can be used with other Rexx implementations that can register and load external functions but is not formally tested with them.

RexxXML downloads as a single compressed file containing either binaries or source. Downloads include a complete guidebook in Adobe *.pdf format. Entitled *RexxXML Usage and Reference*, it is written by the author of the product, Patrick T. J. McPhee. The guide offers an excellent introduction to XML and related subjects like XPath, XSLT, and schemas. It also contains the complete function reference manual and a quick reference guide.

The first step in installing RexxXML is to download and install its prerequisites, the libxml and libxslt products. These free products are distributed under the MIT License and are downloadable at http://xmlsoft.org. They are available for almost any operating system as either binaries or source. The decompressed files include installation instructions that follow typical procedures for Windows, Linux, or Unix. Documentation for the products is at http://xmlsoft.org/docs.html. That Web site also offers good tutorials and introductory information on XML programming, the XML standards, dialects, related standards, and the like.

Download and install RexxXML. Download sites include www.interlog.com/~ptjm and www.interlog.com/~ptjm/software.html. As with libxml and libxslt, if any Web addresses have changed, merely enter the product name into a popular search engine such as Google or Yahoo! to locate other download sites. RexxXML installs in the same manner we've seen in previous chapters covering interfaces such as Rexx/SQL, Rexx/Tk, Rexx/DW, and Rexx/gd. The RexxXML Windows Dynamic Link Library, or DLL, is named rexxxml.dll; the Linux or Unix shared library has the same root name. As always, ensure that the proper environmental variable points to the library directory so that the interpreter can find and load the external functions.

Common operations

We've mentioned the wide variety of operations scripts can perform using the RexxXML functions. In this section, we'll review short code snippets that show how to perform several of the most common operations. The specific operations we'll explore include:

J	How to load the RexxXML library for use
_	How to load, transform, and save XML documents
_	How to verify if a document is well formed and how to validate it
_	How to create XML documents
_	Simple ways to parse documents
	How to apply a stylesheet to a document


First, let's look at how to load the RexxXML external function library for use. A script must register and load the RexxXML library prior to using any of its functions. This is accomplished in a manner similar to registering and loading the Rexx/Tk, Rexx/DW, or Rexx/gd libraries:

```
call RxFuncAdd 'xmlloadfuncs','rexxxml','xmlloadfuncs'
if xmlloadfuncs() <> 0 then say 'ERROR- Cannot load RexxXML library!'
```

All RexxXML functions are now available to the script. Invoke the xmlDropFuncs function to deregister the library and free resources when all XML processing is complete.

Many scripts load, process or transform, and save an XML document. Figure 18-1 diagrams how this interaction typically occurs.

Processing Documents

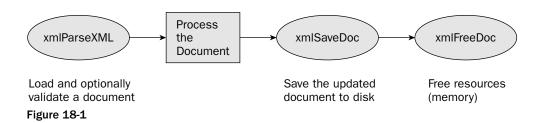

The xmlParseXML function accesses or loads a well-formed (syntactically correct) document:

An optional argument specifies whether the *Document Type Definition*, or *DTD*, should be referenced and the XML file validated. Here are a couple examples:

Applying xmlParseXML to a document that is not well formed returns 0. The same return code indicates an attempt to validate an invalid document.

After processing or transforming the file, the script can write it to disk:

```
call xmlSaveDoc 'test_file.xml', document /* save the document for later */
```

Always free resources after finishing with the data by calling the xmlFreeDoc function:

```
call xmlFreeDoc document /* end processing, free reources*/
```

Now that we've seen how to load, validate, and save XML documents, let's see how to create them. This is just a matter of string processing — splicing and pasting data together with the proper descriptive tags. Assuming that the data is in the chunks array, here's how to build a simple, prototypical XML document. Each data item is written with the proper beginning and ending descriptive tags:

Of course, building XML files can be much more complicated than our simple example. RexxXML provides the full set of required functions.

To add data to an existing document, a script creates the right type of node and inserts it into the proper location within the document tree. xmlAddElement is the function to use. Other useful functions for adding information to documents include xmlAddAttribute, xmlAddText, xmlAddPI, xmlAddComment, xmlAddNode, and xmlCopyNode. Figure 18-2 summarizes how scripts can add or remove data from documents through appropriate RexxXML functions.

Updating Documents xmlAddElement xmlAddAttribute xmlAddText xmlAddPl xmlAddComments xmlAddNode xmlCopyNode xmlRemoveAttribute xmlRemoveContent xmlRemoveNode

Figure 18-2

Processing an XML document means understanding and parsing its tree structure. This allows scripts to search, analyze, and transform XML documents. One approach to processing a document is to expand its document tree into a Rexx array or *stem* containing all the relevant data. The xmlExpandNode function accomplishes this. After issuing this function, scripts can traverse the data in the tree and analyze the document. You can access attribute values by using a tail for the stem that names the attribute.

XPath is another option for searching document trees and analyzing data. Figure 18-3 below diagrams how programs use XPath to process documents.

XPath for Document Processing

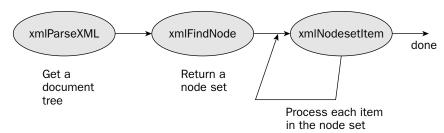


Figure 18-3

The xmlFindNode function returns a *node set* representing a document subtree, from which individual items can be extracted by xmlNodesetItem. xmlNodesetCount tells how many items are in a node set. Look at this example:

This code starts with the document tree or nodeset off the root element. It converts each eligible node in the document into an array and calls the routine named process to work with these nodes.

Validating documents against *schemas* (or data definitions) is another important operation. Schemas are read from files, Rexx variables, or the XSD environment. The four main functions applied to them are xmlParseSchema, xmlValidateDoc, xmlFreeSchema, and xmlDumpSchema.

To validate a document, use the xmlValidateDoc function. xmlValidateDoc validates a document against a schema and returns the string OK if the document matches it. Otherwise it returns a character string describing the problem. Here's an example that validates the document named document against a schema named xsd_to_use:

```
status = xmlValidateDoc(xsd_to_use, document)
if status <> 'OK' then do
    say 'Document did not validate ok, status is:' status
    say 'Here is more information:' xmlError()
end
```

The xmlError function returns the accumulated error and warning messages since the last time it was called. Use it as a generic function to return further information when an error occurs.

Applying XSLT stylesheets is as easy as document validation, in that it only involves four functions: xmlParseXSLT, xmlFreeStylesheet, xmlApplyStylesheet, and xmlOutputMethod. XSLT data can be read from a file, read from a Rexx expression, or taken from the environment. Figure 18-4 diagrams how scripts can apply stylesheets to documents.

Applying a Stylesheet to a Document

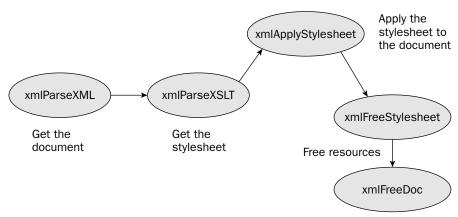


Figure 18-4

Here is an example that shows how to apply stylesheets to documents. It applies the stylesheet named in the first parameter of the xmlApplyStylesheet function to the document named in the second. That function returns the result tree:

The final two statements in this example free the stylesheet and the document after processing is complete. In working with XML it's a good idea to always free resources after the script has completed processing the items.

A sample script

RexxXML ships with a couple dozen sample programs. All come complete with appropriate *.xml, *.xsd, *.xsl, and *.html input files. The bundled manual *RexxXML Usage and Reference* discusses several of the examples in detail.

Let's take a look at an sample script. It appears courtesy of the author of RexxXML, Patrick T. J. McPhee. This sample script is called <code>iscurrent.rex</code>. It reads an HTML Web page. It scans the Web page and extracts a data element from items in a table in that Web page. The data item it extracts is the most

current version for the RexxXML software package. The script compares that version to the one the script itself is using. If the Web version is newer, the script informs the user that a newer version of RexxXML than the one he or she is using is available.

This script demonstrates how to access an HTML Web page, how to scan it, and how to extract information from it.

Here is the script:

```
/* check software.html to see if we're up-to-date
* $Header: C:/ptjm/rexx/rexxxml/trip/RCS/iscurrent.rex 1.3 2003/10/31 17:16:45
ptjm Rel $
rcc = rxfuncadd('XMLLoadFuncs', 'rexxxml', 'xmlloadfuncs')
if rcc then do
 say rxfuncerrmsg()
 exit 1
 end
call xmlloadfuncs
software.html = 'http://www.interlog.com/~ptjm/software.html'
parse value xmlVersion() with myversion .
package = 'RexxXML'
sw = xmlParseHTML(software.html)
if sw = 0 then do
 say xmlError()
 exit 1
/* software.html has a single table. Each row of the table has the
   package name in the first column, and the version number in the second.
   The first occurrance of the package is the most current one. */
prow = xmlFindNode('/html/body/table/tbody/tr[td[1] = $package][1]', sw)
if xmlNodesetCount(prow) \= 1 then do
 say 'unexpected row count' xmlNodesetCount(prow)
  exit 1
  end
curver = xmlEvalExpression('td[2]', xmlNodesetItem(prow, 1))
if curver \= myversion then do
   say 'My version is' myversion
   say 'Current version is' curver
   say 'which was released' xmlEvalExpression('td[3]', xmlNodesetItem(prow, 1))
   end
else
   say 'All up-to-date!'
```

The script initializes by registering and loading the RexxXML library:

```
rcc = rxfuncadd('XMLLoadFuncs', 'rexxxml', 'xmlloadfuncs')
if rcc then do
  say rxfuncerrmsg()
  exit 1
  end
call xmlloadfuncs
```

This initialization code would typically appear at the start of any RexxXML script. It is very similar in design to the code in previous chapters that loads and registers other external function libraries, for example, those for Rexx/SQL, Rexx/Tk or Rexx/DW. Note that the rrfuncerrmsg function is specific to Regina Rexx. It returns the most recently occurring error message. If you're not using Regina, leave this statement out your code. We recommend replacing it with your own error message concerning the problem.

Following initialization, this line specifies the URL (or Web page address) of the HTML Web page to analyze:

```
software.html = 'http://www.interlog.com/~ptjm/software.html'
```

This next line retrieves the version of RexxXML the script is running under:

```
parse value xmlVersion() with myversion .
```

The version this statement retrieves will later be compared to that on the Web page. If they differ, the script knows that a newer version of the RexxXML package is available and reports that finding in its concluding statements.

This code parses the HTML Web page into a variable as a document tree. A return code of 0 means that parsing failed, and results in a call to xmlError for more information:

```
sw = xmlParseHTML(software.html)
if sw = 0 then do
   say xmlError()
   exit 1
   end
```

Now that the code has retrieved the Web page HTML and parsed it into a document tree, it must inspect a table within the HTML that lists software packages and their versions. The header of the table describes its contents:

```
<thead>

Package
Version
Date
Notes

Notes
```

The next program statement retrieves the row from the table that refers to the most recent version of the RexxXML package. The program knows that the first occurrence of the package in the table in the most recent one. It uses the following statement, with its XPath expression, to retrieve the appropriate information from the table:

```
prow = xmlFindNode('/html/body/table/tbody/tr[td[1] = $package][1]', sw)
```

Now, this statement extracts the <code>Version</code> data element from the row just retrieved. Together with the previous statement, this operation requires coding that is a bit detailed. For right now, just concentrate on what the statements do. They retrieve the appropriate data element, the RexxXML version, from the HTML table:

```
curver = xmlEvalExpression('td[2]', xmlNodesetItem(prow, 1))
```

The final lines of the program compare this version to that under which the script runs. It displays a message as to whether they differ:

```
if curver \= myversion then do
   say 'My version is' myversion
   say 'Current version is' curver
   say 'which was released' xmlEvalExpression('td[3]', xmlNodesetItem(prow, 1))
   end
else
   say 'All up-to-date!'
```

This sample script illustrates how easy it is to process and analyze a Web page or document with the RexxXML functions. The package offers much more capability than can be shown here. It saves a lot of string processing work that scripts would otherwise have to perform themselves in order to process XML. Readers are urged to download the RexxXML product, review its examples, and read the documentation.

Other Rexx Tools, Interfaces and Extensions

As a worldwide scripting language in use for over four decades, there are literally too many Rexx tools, utilities, extensions, and interfaces to track them all. Appendix H lists some of the available tools and hints at their breadth. All are either open source or free software.

You can locate most of these tools simply by entering their names as search keywords in any search engine, such as Google. Code repositories such as SourceForge and GitHub host many of these tools. Or go to www.RexxInfo.org for a single point of access to most of them.

Summary

This chapter explores the free RexxXML package for processing XML files. RexxXML provides almost any function needed to work with XML, HTML, XPath, XSLT, and related data description languages. Combined with the string manipulation strengths of Rexx scripts, RexxXML makes XML processing quick and straightforward.

This chapter defined what terms like XML, XSLT, XPath, and HTML mean. We investigated the kinds of XML processing that the RexxXML package makes possible. We briefly discussed the functions in RexxXML, including those for document tree parsing, document tree searching, XSLT processing, and schema validation. And we discussed specific XML operations, such as how to load and process XML documents, how to process documents, how to validate documents, and how to process them against XSLT stylesheets. We reviewed one of the sample scripts that ships with the RexxXML package. The sample script demonstrates how to access a Web site, download an HTML page for processing, and how to scan that Web page and extract a relevant data element. In all, we saw that RexxXML is a comprehensive package that makes working with XML and its related technologies much simpler.

There are dozens of other add-in interfaces and tools for Rexx developers. In Chapters 15 through 18, we discussed a few of the most widely used packages and demonstrated how to use them. While we could only skim the surface of these products in the limited space available, the material did provide an introduction sufficient to get you started with the tools. Appendix H lists several dozen more free and open-source Rexx interfaces and tools along with brief functional descriptions. Most can be found for free download on the Internet merely by entering their names into any popular search engine. New Rexx function libraries and utilities are continually being produced.

Test Your Understanding

- **1.** What is the relationship between HTML, XML, XPath, and XSLT? What role does each play? Why is self-describing data useful? What language is used to build Web pages?
- **2.** How can you validate a document against a schema? What RexxXML functions do you use to load documents and save them?
- **3.** If you wanted to write a script to automatically scan Web pages and extract information, what RexxXML functions would you use? How do you ensure that the script dynamically connects to the Web page to analyze?
- **4.** Does Rexx include regular expressions? If you wanted to add regular expressions to your scripts, how would you do this?
- **5.** What RexxXML functions would you use to apply a stylesheet to a document?

Part II

Evolution and Implementations

Overview

You have reached the point in this book and in your understanding of Rexx that you know the core language. Now it is time to explore more deeply the many platforms, problems, and situations to which Rexx applies. Let's expand our knowledge into advanced Rexx.

This chapter outlines the history and evolution of Rexx. Discussing the evolution of the language shows how it has migrated across platforms and addressed new developer needs over time. This is useful in analyzing where Rexx fits into your own organization and how you can assess its utility as a universal scripting tool.

This chapter analyzes the roles Rexx fulfills, as a scripting language, macro language, shell extension, application programming interface, object-oriented scripting tool, mainframe command language, and vehicle for programming handheld devices. It discusses where different Rexx implementations fit into this picture. It describes the "personalities" of the various Rexx interpreters and when and where you might want to use each.

It also introduces a methodology for comparing Rexx interpreters to one another. The methodology can be used, too, for comparing Rexx against other scripting and programming language alternatives. Different projects and different organizations have different needs. No one interpreter is best for every situation. This chapter helps you compare and contrast interpreters and discusses some of the roles of the various Rexx products.

This chapter also introduces the remainder of the book. The chapters that follow, Chapters 20 through 30, discuss specific Rexx interpreters. Each describes the personality of an interpreter, where it runs, how to download and install it, and its features that extend beyond the Rexx standards.

The upcoming chapters offer sample scripts that demonstrate many of the interpreter extensions and how they can be leveraged on specific platforms. The goal is to provide you with interpreter- and platform-specific information.

Chapter 19

Rexx interpreters run the gamut of platforms and applications. Some emphasize portability, while others emphasize platform-specific extensions and leverage platform-unique features. Some target cell phones, while others target mainframes. Some are object-oriented, while one offers an alternative to Java programming (it runs on the Java Virtual Machine and generates Java bytecode).

The upcoming chapters go beyond the fundamentals of classic Rexx covered to this point and expand into the extended features of Rexx as it runs on different platforms. But first, we take a step back. We need to understand how Rexx evolved, why different interpreters are available, and some of the differences among them.

The Evolution of Rexx

Let's start by discussing how Rexx was invented and how it has evolved. This helps us understand why there are many different Rexx interpreters today, and how they came to be. Understanding the larger picture is useful in assessing the various uses of Rexx and the differences among Rexx interpreters.

Rexx was invented in 1979 by Michael Cowlishaw at IBM's UK laboratories. It evolved into its present form in the early 1980s. Rexx stands for *REstructured eXtended eXecutor*. Rexx is sometimes written in all-uppercase as REXX.

Rexx was designed to fulfill the promise of *scripting languages* — as general-purpose, high-productivity, easy-to-use vehicles for the quick solution of programming problems. Rexx was designed to be easy to use, yet powerful and flexible. These two design goals — ease of use and power — normally conflict.

The specific goal in Rexx was to bring them together. This contrasts with the goals of many other scripting languages, which include:

Addressing a specific problem space
Fulfilling the personal goals or tastes of their inventors
Compatibility with earlier languages
Optimizing machines resources (CPU cycles or memory)
Ease of interpreter writing

The goal with Rexx was to develop a general-purpose language that would be used by the widest possible cross-section of people and would fit their needs. Presciently anticipating how the Internet would drive cooperative software development more than a decade later, inventor Cowlishaw offered free use of Rexx within IBM's network and solicited suggestions and recommendations. He got it in abundance, frequently answering hundreds of emails with ideas every day. This feedback was critical in shaping the language as user-friendly yet powerful. The result is that Rexx has its own unique personality among scripting languages.

Evolution and Implementations

Any programming language ultimately faces the popularity test. As Rexx spread throughout IBM, IBM's customers became aware of the language and demanded it. IBM complied by shipping Rexx as the scripting language for its VM mainframes. Soon IBM bundled Rexx with all versions of its mainframe operating systems, including those in the OS and VSE families.

In the 1990s, IBM developed a strategy for common software across all their computers. They called it *Systems Application Architecture*, or *SAA*. IBM selected Rexx as its official *command procedure language* across all its operating systems. The result was that IBM has bundled Rexx with all its operating systems ever since, including their mainframes (OS, VM, and VSE), midrange servers (IBM i, previously known as i5/OS and OS/400) and Power Systems, and personal computers (PC-DOS and its follow-on OS/2, which eventually evolved into eComStation and then ArcaOS).

Others soon picked up IBM's enthusiasm for the language. Microsoft offered Rexx as the Windows scripting language in the Windows 2000/XT Resource Kits. (The company later dropped Rexx in order to proprietarize Windows scripting. It did this by promoting its own tools such as VBScript and later PowerShell). Several other systems, including the Amiga and its descendants, bundled Rexx as their default OS scripting language.

By the 1990s, Rexx had become quite popular. But it was still widely considered an IBM product — even if this view was not entirely accurate. Two events transformed Rexx from an IBM language into a universal scripting language:

The American National Standards Institute (ANSI) standardized Rexx in 1996. This gave it inter-
national imprimatur and prestige and transferred control of the language from IBM to a recognized
standards organization.

☐ The free and open source software movement.

The result is that today free Rexx runs on virtually every known platform, from cell phones and tablets, to laptops and desktops, to midrange servers of all kinds, up to the largest mainframes. There are very few platforms on which Rexx does not run. There are at least dozen free Rexx interpreters and Rexx is used worldwide.


Figure 19-1 pictorially displays the cross-platform versatility of the free Rexx interpreters.

Rexx runs on all today's major platforms: Windows, Linux, Unix, BSD, macOS, cell phones, and mainframes.

But just as significant is that it also runs on many obscure and lesser-known systems. (This even includes obsolete platforms, which is handy if you happen to still support one.) There are more of these than we can list here, but they include DOS family systems, OpenVMS, CISC, eComStation, ArcaOS, OS/2, Mac OS X, classic Mac OS, Amiga OS 4, AROS, aeROS, MorphOS, AOS, Athos/Syllable, QNX, BeOS, Palm OS, SkyOS, Symbian OS/EPOC32, Pocket PC, Windows CE, Windows handhelds, and more.

For a language to achieve this success, its *language definition* must coalesce at the right time. If a language is locked into definition too early, it may not evolve sufficiently and can ossify into a stunted form. On the other hand, if a language fails to acquire formal definition in time, it can fragment into a tower of babble. Or, when a formal definition does come along, there may be so many incompatible versions in use that the standard does not mean anything. (The BASIC language is an example. There are so many nonstandard versions of BASIC that the official language definition means little.)

Free Rexx Implementations

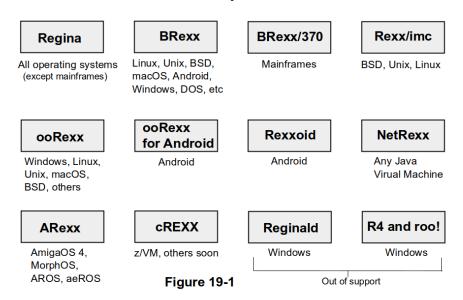

Rexx was lucky. Its inventor wrote a book to provide an informal language definition early on. *The Rexx Language* by Michael Cowlishaw (Prentice-Hall, 1985) crystallized the language and provided de fact direction for various implementations. With minor revisions, it was republished as a second edition in 1990. This edition is commonly referred to as *TRL*-2 or *TRL*2.

American National Standards Institute promulgated their ANSI Rexx standard in 1996. The standard follows TRL-2 very closely and ties up a few minor loose ends. The ANSI-1996 standard finally gave Rexx the imprimatur and prestige of an international standards body. It is formally known as X3.274-1996 and was developed by ANSI technical committee X3J18. Chapter 13 enumerates the exact differences between the TRL-1, TRL-2 and ANSI-1996 standards.

Rexx is both *well documented* and *highly standardized*. This makes possible portable programming across the extremely wide variety of platforms on which Rexx runs. Chapter 13 made some recommendations about how to maximize the portability of Rexx scripts. These fundamentals also make skills transferable. If you can program Rexx on one platform, you can program it on any platform.

With the rise of object-oriented programming in the 1990s, two free object-oriented Rexx interpreters came out. IBM developed Object REXX and Kilowatt Software created roo! Both are super sets of classic Rexx; they run standard Rexx scripts without alteration. IBM's Object REXX became an open source product in early 2005. It is now called Open Object Rexx – or *ooRexx* — and is managed as an open source project by the non-profit Rexx Language Association.

Evolution and Implementations

As Java became a popular language for developing Web-based applications, Michael Cowlishaw also developed NetRexx, a Rexx-like language that runs in the Java environment on the Java Virtual Machine (JVM). NetRexx scripts synergistically coexist with Java code. NetRexx scripts use Java classes and NetRexx can be used to create classes usable by Java programs. NetRexx can be used to write applications, servlets, and Java Beans. NetRexx is also a free and open source product.

The Rise of Scripting Languages

Let's step back a moment from Rexx and its variants to talk about scripting languages. As explained in chapter 1, Rexx is a *scripting language*, an interpreted language designed for quick, easy program development. Rexx is widely considered the first general-purpose scripting language.

Scripting languages are high-level vehicles that glue together other software components for quick program development. At their best, they result in higher programmer productivity; faster, easier debugging; and, more readable, maintainable code. Figure 19-2 enumerates some of their benefits:

Scripting Benefits & Drawbacks

Benefits:	Drawbacks:		
Higher programmer productivity	Slower run times (Example: Online Transaction Processing systems)		
Less concern about machine details	Not suitable for low-level machine-specific coding (Example: device driver)		
Ties together and builds on existing software			
Faster, easier debugging			

Figure 19-2

The downsides to interpreted languages are that they are less machine-efficient. They might not be the best choice for an application demanding the absolute highest performance. An example might be an online transaction processing (OLTP) system. In this case, the extra effort coding and debugging with a compiler might well be worth the higher machine efficiency you gain.

Another example might be coding a low-level device driver, or a frequently used internal part of an operating system. These applications might require the lower-level detailed control a language like C or C+++ or Java affords. Scripting languages aren't generally used for programming that requires low-level machine access.

The Trend Towards Scripting

One of the biggest shifts in software development over the past two decades is the increasing popularity of scripting languages. The reason for this is that their strengths fit the needs of 21st century programming:

- ☐ Computers have become much more powerful. Today's laptop exceeds the power of a mainframe fifty years ago. So the run-time differential between interpreted and compiled programs, once so important, today rarely matters.
- ☐ The rise of the internet required new programming tools. Scripting perfectly fits the web programming paradigm, for both server- and client- side development.
- ☐ The continuing labor crunch places a premium on programmer productivity. As computers become more powerful, why not push the programming burden onto them, instead of the development team? Scripting does exactly that.
- ☐ The rise of free and open source software (FOSS) has permanently changed the programming landscape. Most popular scripting languages like Rexx are FOSS.

And so scripting languages are used for almost any kind of application today:

Scripting Uses

- * Web browser programming
- * Web server-side applications
- * Glue languages
- * GUI programming
- * Command language
- * Job control
- * Systems administration
- * Task automation
- * Text processing
- * Macro programming
- * Embedded programming

Figure 19-3

Understanding Scripting Languages

Classifying scripting languages can help discern their individual strengths and weaknesses. Which languages are appropriate when? What distinguishes one from another? A few charts may help clarify.

One fundamental division is between those languages that are general-purpose versus those that are more narrowly focused on a specific design problem. Look at figure 19-4:

General vs Special Purpose Languages

General Purpose:	Special Purpose:
Rexx, ooRexx, NetRexx, Python, Bash, KornShell, Unix/Linux Shell languages, Perl, PowerShell, Ruby, AppleScript, Visual Basic, VBScript, Tcl, others	JavaScript, TypeScript, ASP.NET, PHP, VBA, R, Lua, AWK, GML, sed, others

Figure 19-4

You can see that some of the special-purpose languages support web development. Others are for text processing or embedded programming. Specially designed scripting languages can be ideal for such tasks.

You might disagree with some of the classifications in the charts we present in this section. That's because it's not always clear how to classify languages. And languages change and evolve over time.

PHP is a great example. It was originally designed exclusively for server-side web programming. It ran on servers to dynamically generate web pages. But it expanded its purview over time, and today can be used for client-side development as well. It can even be used for applications other than web programming (though one rarely encounters it in this role).

PHP highlights another another useful distinction. Some scripting languages were designed specifically for web programming, while others address other kinds of applications. Some cover both bases, while others specialize.

This chart shows some of the more common scripting languages for web development. We've split them into server- versus client- side tools. You can see that Rexx fits with those general-purpose FOSS languages used for server-side development, whereas the client-side tools are specialized tools:

Web Development Scripting

Server Side:	Client Side:
PHP, ASP.NET, Node.js/JavaScript, JSP	JavaScript, TypeScript, PHP, VBScript, others
General-purpose languages also used for server-side web coding: Rexx, ooRexx, Python, Perl, Ruby, others	

Figure 19-5

Another way to categorize scripting languages is to divide them into open source and proprietary products. Rexx sits squarely on the side of FOSS, though there are a few commercial versions around:

Open Source vs Proprietary Scripting Languages

Open Source:	Proprietary:
Rexx, ooRexx, NetRexx, Python, Bash, Perl, PHP, KornShell, Ruby, Tcl, PowerShell, TypeScript, others	AppleScript, VBA, VBScript, others
Also Open Format JavaScript/ECMAScript	

Figure 19-6

Another way to judge scripting languages is by their relative ease of use. "Ease of use" really encompasses a set of related values. Is the language easy to learn, easy to code, and easy to maintain? Does it put the burden of programming on the computer or the programmer?

Easier vs Harder Scripting Languages

Easier:	Challenging:
Rexx, ooRexx, NetRexx, Python, PHP, JavaScript, ECMAScript, TypeScript, Visual Basic, VBA, VBScript, GML, Tcl	Bash, Linux/Unix shell languages, Perl, AWK, LISP

Figure 19-7

Languages that one might consider easy include Rexx, ooRexx, NetRexx, Python, PHP, JavaScript, GML, and forms of Visual Basic. More difficult languages include several whose challenging syntax can be difficult to grapple with. The Unix/Linux shell languages, Perl, and AWK, fit into this category. They're quite powerful, but their idiosyncratic syntax means they aren't easy to use or maintain.

A final distinction is between languages that are cross-platform, versus those that are identified with a particular operating system. Many cross-platform examples spring to mind here, including Rexx, ooRexx, NetRexx, Python, Perl, Ruby, PHP, JavaScript, and others. Most are open source.

Of course there are languages that are cross-platform, but in practice are rarely seen outside their native environment. An example would be PowerShell, which runs on several platforms, but is still nearly always encountered (and considered by most to be), a Windows tool.

Another example is the Linux/Unix/BSD shell languages. Most run on several platforms but are rarely seen outside their native environment. Thus there's a distinction between those languages that can be used across platforms, as opposed to those you truly see employed in this manner.

Cross Platform Versus Platform-Specific Languages

Cross Platform:	Platform Specific:			
Rexx, ooRexx, NetRexx, Python, Bash, Perl, PHP, KornShell, Ruby, Tcl, PowerShell, ASP.NET, JavaScript/ECMAScript, TypeScript, others	AppleScript, GML, Visual Basic, VBA, VBScript, others			

Figure 19-8

Interpreter Options

As you know, the examples in this book were tested using the Regina Rexx interpreter under Windows and Linux. We recommended that you start with Regina because it is an excellent open source Rexx that will run on any platform. Regina meets all Rexx standards and is the most popular free Rexx interpreter. It enjoys the largest user community and more interfaces are tested with Regina than any other Rexx interpreter.

The other Rexx interpreters offer benefits, too. It is time to explore them. There are about a dozen free Rexx interpreters. The following table lists the platforms, costs and licensing terms for all these products. Some are free regardless of the use to which you put them, while others are free for personal and nonprofit use but require a license fee for commercial use. Some are open source, while others are free but not open source. Be sure to read the license for any Rexx interpreter you download and agree to its terms before using the product. A convenient list of free software licenses is maintained by the Open Source Initiative or OSI at www.opensource.org/licenses.

Interpreter	Platforms	Cost & Licensing	
Regina	Nearly everywhere (except mainframes)	Free, open source, GNU Library or LGPLv2	
ooRexx (aka Open Object Rexx)	Windows, Linux, Unix, BSD, MacOS	Free, open source, GPLv2, CPL 1.0	
ooRexx for Android	Android	Free, open source, Apache 2.0 license.	
BRexx	Linux, Unix, BSD, macOS, DOS, Android, Windows	Free, open source, GPLv2	
BRexx370	Mainframes	Free, open source, GPLv2	
Rexx/imc	BSD, Unix, Linux	Free, open source, no warranty	
IBM REXX	Mainframes	Bundled with OS, proprietary license	
IBM REXX Compiler	Mainframes	Proprietary license	
Rexxoid (aka "Rexx for Android")	Android	Free, open source	
NetRexx	Anywhere with a Java Virtual Machine	Free, ICU License	
ARexx	Amiga-derived systems	Free, bundled, license varies	
cREXX	z/VM, soon others	Free, MIT license	
R4 (out of support)	Windows	Free. Limited warranty	
Roo! (out of support)	Windows	Free. Limited warranty	
Reginald (out of support)	Windows	Free. No warranty	

Which Rexx?

Given that there are so many free Rexx interpreters, an important question is which one should you choose? The answer varies by project and by organization because different projects and organizations each have their own criteria. The *weighting* or relative importance of those criteria vary.

For example, one organization might rank Windows GUI programming as their primary concern. Regina or Open Object Rexx (ooRexx) might be their choice. Another organization might cite object-oriented programming as their goal. ooRexx and NetRexx are their prime candidates.

No one interpreter is best for all situations — different projects have different criteria and will result in different "best" decisions. To determine which Rexx interpreter(s) are right for you, follow these steps:

- 1. List your selection criteria.
- 2. Rank the relative importance of the criteria to your project or organization.
- 3. Review the Rexx offerings in view of the ranked criteria.

Many organizations use this *weighted-ranking approach* to evaluating software. List all selection criteria in a spreadsheet and assign each criterion a rank (such as High, Medium, or Low, or a number between 1 and 10). Give each interpreter a rank for how well it fulfills each criterion. Multiply all criteria ranks by the weightings to derive an overall number for each product. The interpreter with the highest number best fits your requirements.

The table below shows how the weighted ranking approach works. Criteria for the project or organization are listed on the left-hand side of the chart, along with the priority for each. These will vary by project or company, as will their relative importance. Of course, your ranking chart will probably list more criteria than shown here; this is just an example of how to create the chart.

Criteria (Rank)	Regina	BRexx	ooRexx	Rexx/imc	NetRexx	others
Runs on our platforms (10)						
Platform extensions (3)						
Performance (5)						
TRL-2 standard (5)						
ANSI-1996 standard (3)						
Support (5)						
other criteria						
TOTAL SCORES:						

The free Rexx interpreters are listed across the top. Each column reflects the score for the interpreter versus the criteria. Multiply the score for each box times the rank or weight and add all rows to score a cumulative weighted ranking for each interpreter. This cumulative ranking is written for each interpreter in the last row of the chart.

Weighted-criteria comparison is useful for other kinds of evaluations in computer projects. For example, use it to determine which scripting language is most appropriate for a project or an organization. Rank Rexx versus other general-purpose scripting languages such as Python, Perl, VBScript, the shell languages, Ruby and others. Just as in the comparison of different Rexx interpreters, different criteria and weightings tend to promote different tools as most the suitable for different projects.

Free Classic Rexx Interpreters

The following discussion supplies more background on the "classic" Rexx interpreters. All meet the TRL-2 standard except for NetRexx (which is best described as "Rexx like"). Regina is the only interpreter that adds the improvements required to meet the ANSI-1996 standard. The differences between the ANSI-1996 and TRL-2 standards are very minor — see Chapter 13 for specifics.

The goal here is to offer brief high-level profiles of each product in separate paragraphs. Chapters 20 through 30 offer much more detail on the specific interpreters, their platforms, applications, and language extensions.

We emphasize that the material in this chapter is merely a starting point for your own investigations. Different projects and organizations have different needs. There is no one answer for everyone. Only you know what your needs are, so only you can select the right tool for the purpose you have in mind. With this background, let's briefly profile the different Rexx interpreters.

Regina

Regina is the most popular free Rexx, and it runs on nearly all platforms. Its large user community guarantees good support and means that more interfaces and tools are tested with Regina than any other Rexx. Regina is an open source product distributed under the GNU Library General Public License.

Regina includes a very wide variety of extensions: it interfaces to just about every tool, from GUIs to databases to XML or whatever you need. The external function libraries and interfaces it works with include advanced C-like I/O, SQL database I/O, Tk GUI, DW GUI, gd graphics, XML, JSON, ISAM I/O, and many others.

Regina also offers platform-specific features. So if you work on popular systems like Windows or Linux it brings many OS-specific features to the table. It can even run as part of a shell (the Z shell).

Regina is one of the few free Rexx interpreters that fully implement the SAA application programming interface, or API. This provides a well-documented interface between Rexx and other languages. This allows Regina to be employed as a set of callable routines. It gives Regina a documented, standardized interface to Rexx extensions whether they ship with Regina or other Rexx interpreters.

Regina's documentation is very detailed and contains perceptive insights on Rexx interpreters and the finer points of the language. It explains Rexx standards and compatibility issues, how to use the SAA API, error conditions, I/O, the stack and language extensions. Chapter 20 discusses Regina in detail.

BRexx

BRexx is one of the fastest Rexx interpreters and it features a tiny disk footprint. BRexx runs under Linux, Unix, BSD, macOS, mainframes, Android, Windows, and several other systems.

BRexx is especially well suited to systems with limited resources, such as cell phones, handheld devices, and smaller or older systems. It runs natively under Android, tiny Linuxes, DOS, Windows handheld versions like Windows CE, and similar small-footprint platforms. Its facility with DOS is not to be ignored – DOS is still popular for programming embedded systems and specialized devices, especially where a real-time single-tasking OS is required.

On Android, BRexx uses a universal Android scripting interface called Scripting Layer for Android (or SL4A).

SL4A allows developers to automate Android tasks in scripting languages instead of using Java. The advantage, of course, is that Rexx has simpler syntax than Java. Also, it's much faster and easier to develop with an interpreted scripting language than a compiled language like Java. Chapter 25 explains how to use BRexx on Android and provides sample programs.

For all platforms, BRexx comes bundled with a number of external function libraries that go beyond the Rexx standards. Among its facilities for various platforms come built-in and external functions for math, PC file I/O, ASCII-EBCDIC conversion, C language style input/output, console I/O, array I/O, Windows CE, DOS interfaces, and ANSI-terminal screen I/O. BRexx also includes functions for VM/CMS-like buffer management, interfaces for databases like MySQL and SQLite, date/time conversions, and CGI scripting.

Like Regina and Rexx/imc, BRexx features a long, proven support history. Chapter 22 describes Brexx and presents sample BRexx scripts. Chapter 25 specifically covers its use for Android programming.

BRexx/370

This is the BRexx code, ported and adapted to mainframe operating systems. One GitHub-based project targets CMS (VM/370) while the other targets MVS (OS/VS 3.8). Both run on the Hercules emulator, an open source tool that allows you to run mainframe operating systems on personal computers and other platforms. (Learn more about Hercules at http://www.hercules-390.eu/.)

The MVS version of BRexx/370 includes support for VSAM/KSDS, formatted screen, TCP support, NJE38, etc. The CMS version is integrated into CMS and runs memory-resident. Both products give you the ability to issue operating system commands and support the features you'd expect from Rexx running in the mainframe environments. Appendix Z tells where to download these products, how mainframe emulation works on your PC, and where Rexx fits in.

Rexx/imc

Rexx/imc runs on BSD, Unix, and Linux operating systems. It includes extra functions for C-like I/O, higher mathematics, Unix environmental info, and other C-like and Unix-friendly extensions.

Rexx/imc is a partial implementation of the SAA API. It has a proven track-record of support spanning decades. It seems to be most popular in the BSD community. Chapter 21 describes Rexx/imc and offers a few sample scripts that illustrate its extended capabilities.

Rexx for Android (aka "Rexxoid")

Pierre G. Richard of Jaxo, Inc., developed a Rexx interpreter and library in C++. This code runs on most platforms. He initially deployed it on the Palm OS. Today it runs on Android. It offers a way to code Rexx scripts that issue Android shell commands.

Chapter 19

You can download and install Rexxoid from the Google Play Store. At its GitHub home, at https://github.com/Jaxo/yaxx, you'll find a half dozen sample programs as well as product screen shots.

When installing and configuring Rexxoid, it may be helpful to connect the phone to a laptop or desktop computer via USB cable. This also facilitates debugging.

Rexxoid has a fundamentally different design than BRexx for Android. While BRexx uses the SL4A scripting interface, Rexxoid is primarily intended to issue shell commands. From this perspective, it's a little more narrowly focused product. We describe Rexxoid and discuss sample programs in chapter 25.

cREXX

cREXX might best be characterized as an experimental interpreter project. To paraphrase from its GitHub home page, the project's goals are to:

Develop a modern implementation of a Rexx interpreter and compiler from the ground up
Experiment with language improvements
Revisit the Rexx language and determine what can be improved
See if Rexx can be improved while retaining the essence of the language
See if programming can be made even easier

Initially, cREXX runs on the z/VM mainframe platform. The goal is to also make it available on Windows, Linux, macOS, and z/OS mainframes.

Given cREXX's somewhat experimental nature, and in anticipation that it will evolve and change too rapidly for a printed resource like this book to keep up with, we won't cover this project in detail.

Interested readers are encouraged to visit the project at its GitHub home page of https://github.com/adesutherland/CREXX.

Reginald

Reginald was originally based on Regina Rexx. Reginald adds tools and functions that tailor Rexx specifically for Windows programmers.

For example, it includes a Windows installer, a GUI script launcher, and a Rexx-aware text editor. It comes with a GUI dialog plus Integrated Development Environment (IDE), and helps developers to create programs featuring Windows GUI interfaces. Its many other interfaces include those for MIDI files, computerized speech synthesis, Windows file and directory I/O, and TCP/IP sockets. Its function libraries support transcendental math, regular expressions, speech generation, and various utilities.

For developers wishing to create Rexx scripts that mold seamlessly into Windows, Reginald fits the bill. It offers a free "power tool" for Windows developers and supplies all the functions Windows developers need. It's also nicely documented.

Unfortunately, at the time of writing, support seems to have lapsed for Reginald. Reginald is thus "frozen in time" and falling behind Windows developments. Chapter 23 describes Reginald in detail and presents a few sample scripts.

r4

r4 is a product of Kilowatt Software, which also offers the upwardly compatible, fully object-oriented roo! Both are customized for Windows, with easy installation and developer tools specifically designed for that operating system. The support tools and utilities work with both r4 and roo!

r4 and roo! offer GUI tools and accessories that are simpler to use than many Windows GUIs. Some of the tools include a UI forms tool, color text file viewer and editor, over 135 windows command tools, visual accessories, XML to HTML auto-converter, GUI widgets, and so on.

The products each include some 50 sample scripts and introductory tutorials that bring to life the spirit of Rexx as an easy-to-learn language. This documentation helps beginners learn the languages quickly and experienced developers to become immediately productive.

Unfortunately, at the time of writing, Kilowatt Software no longer appears to be supporting r4 and roo!. Like Reginald, they are falling behind Windows' evolution. We retained the material on r4 and roo! in this edition because we do still field occasional inquiries about them. Chapter 26 describes both products, along with programming examples.

Free Object-Oriented Rexx Interpreters

The two free object-oriented Rexx interpreters are supersets of classic Rexx: Open Object Rexx (or "ooRexx"), and roo!. ooRexx runs on Android under the project name of "ooRexx for Android."

These products can run "classic" procedural Rexx scripts without alteration. In addition they support all the features of object-oriented programming through their additions to standard Rexx. Both support inheritance and derivation, encapsulation, polymorphism, and abstraction. They come with complete class libraries.

There is one major difference between the two ooRexx products and roo! — they are completely different implementations of object orientation in Rexx. Their class libraries, new instructions and functions, and even their object-oriented operators differ. Those interested in object-oriented Rexx programming should look closely at the differing approaches and compare them against their requirements.

We might add that there is no ANSI standard for object-oriented Rexx. A standard would give object-oriented Rexx greater importance as a universal language, encourage wider use, and might increase its availability on other platforms.

Object-oriented Rexx is popular both for classic Rexx programmers who wish to transfer their skills to object-oriented programming, and for those who know OOP but seek an easier-to-use language than many of the alternatives. Like classic Rexx, object-oriented Rexx combines its ease-of-use with power. But in this case, the power is based on extensive class libraries.

Open Object Rexx (or "ooRexx")

A product called Object REXX was originally developed by IBM Corporation in the mid-1990s. In early 2005, IBM open-sourced Object REXX and turned its continued development and support over to the Rexx Language Association.

The Rexx Language Association renamed the product *Open Object Rexx*, usually referred to as *ooRexx*. Open Object Rexx is upwardly compatible with classic Rexx and extends the procedural language into the object-oriented world.

ooRexx differs from roo! in that both are object-oriented supersets of classic procedural Rexx that take very different approaches to implementing object-oriented programming.

It's important to note that ooRexx supports all advanced OOP features. That includes multiple inheritance and operator overloading, for example.

ooRexx runs on Windows, Linux, Unix, BSD, macOS, and other platforms. It is definitely the most widely used object-oriented Rexx interpreter. It also runs on Android through the "ooRexx for Android" project.

Chapters 27 and 28 describe ooRexx in detail, and walk you through a number of example programs. If you're not familiar with object-oriented programming, this is the perfect way to learn. Use your knowledge of Rexx and expand it at the pace that suits you into the object-oriented world.

Appendix I lists the ooRexx classes. Viewing that list will give you an idea of the extensive power ooRexx offers.

ooRexx for Android

ooRexx for Android brings the benefits of Open Object Rexx to the Android. ooRexx was ported to Android by Thomas Grundmann-Kahr of Germany. It is offered under the Apache 2.0 open source license.

As a port, it features all the classes, methods, etc, available in ooRexx. The only difference is that it specifically targets Android, instead of the other platforms ooRexx supports (Windows, Linux, BSD, Unix, macOS, etc.).

The product home is at GitHub at https://github.com/itsmetjk/ooRexx5_for_AndroidOS. From there, you can download the interpreter and access all its documentation. The software includes an Android Package Kit (APK) for easy installation. Chapter 25 covers ooRexx for Android.

At the time of writing, scripts can only be run on a rooted device and require the Android Software Development Kit (SDK). This may change in the future.

roo!

Kilowatt Software offers their object-oriented extension of classic Rexx called roo! It is a companion product to their classic Rexx interpreter r4.

roo! adds all object-oriented features to classic Rexx, including a full class library and support for all object programming principles. Upwardly compatible with r4, it uses all the same tools. Good tutorials bridge the gap between classic Rexx and object-oriented programming.

Unfortunately, like r4, roo! appears to be out of support from Kilowatt Software. It is thus falling behind Windows' evolution. Since some readers still ask about it, chapter 26 describes roo! in detail.

NetRexx

NetRexx is an free and open source "Rexx-like" interpreter that runs wherever Java runs -- on a *Java Virtual Machine*, or *JVM*. In fact, NetRexx was the first language (after Java itself) to run on the JVM.

NetRexx offers an alternative way to script Java applications with a language that is closely modeled on Rexx. It uses the Java class library. You can code NetRexx scripts that call Java programs, or vice versa, or you can use NetRexx as a complete replacement or alternative to Java programming. You can even code Java Beans in NetRexx and use it for server-side programming as well. NetRexx is an easier-to-learn and use scripting language than Java that jettisons Java's Clanguage heritage for the clean simplicity of Rexx.

NetRexx is not a superset of classic Rexx. It is best described as a Rexx-like language for the Java environment. Since NetRexx is not upwardly compatible with classic Rexx, there is a free standard Rexx to NetRexx converter program available called *Rexx2Nrx*. Find it at www.RexxInfo.org or enter keyword Rexx2Nrx in any Internet search engine.

Michael Cowlishaw – the inventor of classic Rexx – also developed NetRexx. Today, the product is free and open source, and is developed and maintained by the Rexx Language Association. The RexxLA offers a free license to download and use NetRexx for all Java environments. Chapter 30 describes NetRexx in detail.

Mainframe Rexx

Rexx was originally developed in the early 1980s to run under the VM family of operating systems. Later in the decade IBM released Rexx for OS- and VSE-family mainframe systems as well.

Rexx has now been the dominant mainframe scripting and command language for decades. It integrates with nearly all mainframe tools and facilities and is the primary mainframe macro language.

Some of the mainframe systems with which it interfaces include: TSO, CMS, ISPF, Xedit, editor macros, MVS Batch, SYSREXX, RACF, CCA, SMF, SDSF, NetView, CICS, DB2, CONSOLE, GCS, LINK*, ATTACH*, SYSCALL, IPCS, CPICOMM, CPIRR, LU62, APPCMVS, OPENVM, Zowe, and all address spaces or environments.

That's quite a list. You can see why Rexx is irreplaceable as a mainframe administrative or systems management tool. Of course, it's quite popular for user applications, too.

Mainframe Rexx is so widely used that IBM long ago introduced a Rexx compiler. So developers can ultimately compile their programs for greater runtime efficiency once they have thoroughly debugged them.

Mainframe Rexx is not free or open source but comes bundled with the operating system. Chapter 29 discusses mainframe Rexx. It lists the differences between it, the ANSI-1996 standard, and the free Rexx implementations. This helps those who are transferring either their skills or their code from mainframes to other platforms. It may also prove useful to those who know systems like Windows, Unix, or Linux and have occasion to work with mainframes.

You might wonder: aren't mainframes fading away? Do people still use them? Are mainframe skills still a viable career path?

IBM doesn't release sales numbers. The result is that you'll find no lack of passionate arguments for either side of this question on the internet. Our own sense of it is that we're in a steady state.

According to statistics from several sources, at the time of writing, somewhere over 70% of Fortune 500 companies have mainframes. They are vital platforms in many industries, including banking and finance, retail, insurance, healthcare, government, and transportation. Mainframes process over 90% of the world's credit card transactions, for example.

Surveys shows that large companies that have mainframes nearly always keep them.

Yet the once common scenario of new companies growing into mainframes is probably a story of the past, now that there are alternatives like cloud services, parallel Linux servers, and other options.

Some argue that Rexx will fade as a mainframe language as the "baby boomer" generation that grew up with it retires. That doesn't seem to be the case. Younger programmers in countries that support outsourcing work, such as India, are keeping Rexx alive and healthy. Those who think that the use of mainframe Rexx is shrinking may be mistaking shifts in staff locations for a decline in usage.

Chapter 29 covers mainframe Rexx. It discusses the unique characteristics of mainframe Rexx and how it differs from many of the free Rexx implementations. As well as mainframe professionals, this discussion may be of use to those who transfer either their skills or their code between mainframes and other platforms. It may also prove useful to those who know systems like Windows, Unix, or Linux and have occasion to work with mainframes.

These appendices also specifically cover mainframe Rexx topics:

Appendix E Mainframe-specific functions
Appendix N How to Code EXECIO
Appendix O How to Write ISPF Edit Macros
Appendix P How to Run Rexx in Batch
Appendix Q Rexx <> Clist Equivalences
Appendix R Mainframe Rexx vs the ANSI-1996 Standard
Appendix W Job Interview Questions
Appendix Z BRexx/370 for Mainframe Emulation

ARexx

ARexx is a Rexx interpreter originally written by William S. Hawes and bundled with the Amiga computer line in the 1980s. While the Amiga computer is today little known, it was considered a very innovative machine for its time and had quite a mindshare impact. Amiga's success was based on its offering the first popular multi-tasking operating system for a personal computer. The OS coupled these advanced features with the easy programming provided by Rexx as its primary scripting language.

While the Amiga was popular and highly respected in its day, the company behind it, Commodore International, ultimately fell into decline and faded away in the 1990s.

Yet the great popularity of the Amiga ensured its survival. Today there are several successor operating systems that keep the Amiga spirit alive and run ARexx:

AmigaOS 4 (also known as AOS4)
MorphOS
AROS (acronym for "A Research Operating System"
aeROS (or AEROS)

All these are live systems that are used and supported. They run on a variety of platforms including various models of Amiga, PowerPC, Apple mac's, and AmigaOne. Some of the underlying processors include IA-32, Intel, ARM, m68k, PowerPC, and ARM. You can get a sense of the liveliness of this community by visiting one of its code repositories at Aminet at https://AmiNet.net.

ArcaOS Rexx

Earlier we mentioned that IBM bundled Rexx with OS/2 from its inception. This gained the language many new adherents and resulted in the development of a large variety of Rexx packages and interfaces.

Ultimately, of course, OS/2 lost the famous "OS wars" of the 1990s to Windows. But while it was swept from the limelight, OS/2 continued on as a viable platform.

Eventually IBM transferred OS/2 development and support to a company called eComStation, or eCS. Later that company transferred OS/2 to its current developer, Arca Noae. Today the operating system is called ArcaOS, and it continues to bundle and run Rexx, as did all its predecessors.

uni-Rexx by The Workstation Group

uni-Rexx is a commercial ANSI-standard Rexx implementation for Unix. It includes a Rexx interpreter, a Rexx compiler, OS-related extensions, application programming interfaces and a sample scripts library.

uni-Rexx is the macro language for editors and other tools from the same vendor including uni-SPF, uni-XEDIT, netCONVERT, and Co/SORT. Uni-Rexx is a rock-solid product: the author supported an application of over 10,000 lines of code in uni-Rexx and never encountered a single bug or issue. Find The Workstation Group at www.wrkgrp.com or at 1-847-540-3390.

Other Commercial Rexxes

There have been numerous commercial Rexx offerings over the years. Beyond uni-Rexx and the Rexx implementations that are bundled with operating systems, most have fallen by the wayside in the face of free and open source competitors. Examples include S/REXX by Treehouse Software, Personal Rexx by Quercus Systems, Mansfield Rexx from the Mansfield Group, and others.

Running Rexx in the Shell

Like other scripting languages, Rexx scripts run as a separate process than the one that invokes them. Run a Rexx script from the operating system's command line (or by clicking an icon), and the operating system spawns a separate process for the script.

Shell language scripts run in the same process as the command interpreter. The advantages to this are:

Environment variables set by the script remain in effect after its termination.
The current working directory can be altered permanently by the script.
The numeric return code of the script is available in the return code variable identified by the special shell variable (in some operating systems named \$?).

One packaging of Regina Rexx enables it to run in the same process as the Z-shell (zsh). This yields the above advantages. This is useful for scripts that need to alter the user's environment, for example, for scripts that perform product setup, installation, or customization. If you need to run a script within the shell itself, Regina can fulfill your requirements.

Rexx As an API

Several Rexx interpreters are implemented as a library suitable for linking into other applications. This allows programs written in other languages to employ Rexx as a set of callable routines that provide the functionality inherent in Rexx.

Rexx interpreters use a consistent interface standard, called the *SAA API* or sometimes the *Rexx API*. These include Regina, Open Object Rexx, Reginald, and with partial compliance, Rexx/imc. The Regina Rexx documentation manual has a complete section that explains how this works.

The documentation is written from the standpoint of C/C++ programmers. The IBM Rexx SAA manual may also be of interest to those using the Rexx API. See Appendix A for details on how to obtain these sources of API information.

Rexx As a Macro Language

Macro languages are used to provide programmability within a product. Rexx is a popular macro language for a variety of products. For example, Rexx can be used as a macro language to tailor and customize various text editors, such as the primary mainframe editors (ISPF and XEDIT), THE (The Hessling Editor), and the Rexx Text Editor (RexxED). Rexx has found its greatest popularity as a macro language in the mainframe environment. Appendix O explains how to code Rexx edit macros and provides program examples.

Multiple Rexx Interpreters on One Computer

Given that there are so many Rexx interpreters, you might wonder: can I install more than one on the same computer? Absolutely. Chapters 20 through 30 describe various free Rexx interpreters and show how to install each.

In most cases, you can install more than one Rexx interpreter on the same machine without experiencing any conflicts. Just follow the normal installation procedures, then use the products in the usual manner. The author routinely installs both Regina and ooRexx on the same computer without any issues.

There are a few aspects of which to be aware. First, you'll need to ensure that each interpreter's executable has a unique name. This is important because a few of the products use the same name for their interpreter. For example, versions of Regina, Rexx/imc, and ooRexx all call their executable rexx. If you install these three interpreters into a shared directory this creates an obvious conflict.

Secondly, when you install more than one interpreter on a single computer, you'll want to ensure you are running the interpreter you think you are in any particular situation. It is possible, for example, to implicitly run a script, and have that script executed by a different interpreter than the one you thought ran it. For example, if you install several Rexx interpreters on a Windows machine, you'll want to know which interpreter runs a particular script when you double-click on it.

The solution to the first problem is simply to ensure that each Rexx executable has a unique name. Installing the interpreters under different directories resolves this issue because the fully qualified path name is the filename for the executable. This approach works fine if you want to place each interpreter in its own unique product directory.

If you want to place multiple Rexx interpreters in the same directory, you'll have to rename any executables whose names conflict. An example where this might be an issue is if you use Linux operating system and want to install all language interpreters into the same shared executables directory. The solution is simply to ensure that each Rexx interpreter in that directory has a unique name for its executable. For example, versions of Regina and Rexx/imc both call their executable <code>rexx</code>. You might delete Regina's <code>rexx</code> binary and use its <code>regina</code> binary instead. Or rename Rexx/imc's binary to <code>rexximc</code>.

Chapter 19

Once you have installed multiple Rexx interpreters, any standard Rexx script will run under any of the interpreters. Still, you'll probably want to know (or ensure) which interpreter executes when you run a script. One solution is to *explicitly* invoke scripts. Name the interpreter to run on the command line with the name of the Rexx script to execute as its input parameter. For example, this command runs a script under the r4 interpreter on a Windows machine. r4's executable is named r4:

```
r4 rexxcps.rexx
```

This command runs the same script on the same computer under BRexx. This BRexx executable is named rexx32:

```
rexx32 rexxcps.rexx
```

If necessary, use the full path name to uniquely identify the executable to run. This technique is useful if the unqualified or "short" filenames of the interpreters are the same but their fully qualified path names differ. Here is an example that specifies the full path name of a Rexx interpreter on a Unix machine. The name of the executable is rexx, a potentially duplicate short filename, but the fully qualified pathname ensures that the interpreter you want runs:

```
usr/local/bin/regina/rexx rexxcps.rexx
```

If you don't fully qualify the executable name, the operating system's search path may dictate which binary runs. Take this command:

```
rexx rexxcps.rexx
```

Assuming that there are multiple rexx executables on the machine, the operating system has to choose which to run. Most operating systems have an environmental variable that tells which directories to search for the binary and the order in which those directories are searched. This environmental variable is named PATH (or path) under Windows, Linux, Unix, BSD, and other operating systems. In terms of the example, the first reference in the search path that resolves to a valid executable named rexx is the one the operating system runs.

Under the Linux, Unix, and BSD operating systems, you may direct which interpreter runs a script by coding some information on the first line of the script. The first line of the script begins with the characters #! and specifies the fully qualified name of the Rexx executable. For example, to run the Rexx/imc interpreter the first line in each script will typically be its fully qualified executable's name:

```
#!/usr/bin/rexx
```

The fully qualified path name and the name of the Rexx executable vary by the interpreter. If two interpreters use the same fully qualified name for their executable, change the name of one of them to distinguish it. This unique reference then becomes the first line in scripts that use that interpreter.

Under operating systems in the Windows family, the *file association* determines which Rexx interpreter executes a script when you click on that script. File associations are established for the interpreters automatically when they are installed. Here are the default file associations for some Rexx interpreters you might install under Windows:

Rexx Interpreter	Typical Default File Extension
Regina	.rexx
ooRexx	.orex or .rex
BRexx	.r
Reginald and r4	.rex
NetRexx	.nrx

You can set the file associations manually (or alter them) through the Windows' file Explorer. Go to the top menu bar, select Tools | Folder Options... | File Types, and you can view and optionally change file associations. Or access this tool by searching for the keywords "associating files" in the Windows Help system. Managing the file associations allows you to avoid any conflicts in assigned file extensions among the Rexx interpreters.

The chance of a conflict when installing two or more Rexx interpreters on the same computer is low. If you do have a conflict, verify that each Rexx interpreter has a unique name; try explicitly running the interpreters using their full pathnames; verify that PATH (or path) variables are correct; verify that the libraries the interpreters require are in the correct directories; and, verify the Rexx script extensions.

Java Integration

You can commingle Rexx with Java in several ways. We've already mentioned NetRexx, the Rexx-like language that runs on the Java Virtual Machine. Use it to code applications, beans, and servlets.

In addition, the free and open source tools **BSF4ooRexx** and **BSF4Rexx** bring the full capabilities of Java to ooRexx and classic Rexx, respectively. **BSF** stands for *Bean Scripting Framework*. These tools enable you to exploit all Java classes, objects, and functionality from within ooRexx and classic Rexx. Chapter 24 provides examples of using BSF4ooRexx for programming single board computers. Appendix T covers Java integration and the Bean Scripting Framework in detail.

Summary

In this chapter, we took a step back and described the invention and evolution of Rexx. The goal was to get a bit of perspective on the language's platforms, roles, and applications.

This chapter summarized the various Rexx interpreters that are available. It profiled their strengths, the platforms on which they run, and their major characteristics. We also presented a methodology for deciding which interpreter is most suitable for a particular project or application. Different projects and organizations have different needs, and the methodology helps structure decision-making when selecting a product. The methodology can be used either to compare Rexx to other scripting languages or to select a Rexx interpreter from among the several that are available.

Chapter 19

This chapter also discussed the roles that Rexx scripts fulfill within organizations. These include using Rexx as a macro language, calling Rexx functions from other languages through the Rexx API, running Rexx in the shell, scripting cell phones and handheld devices, and Rexx in its role as the mainframe command language. Several object-oriented Rexx interpreters are available. In an extended and altered version called NetRexx, the language also participates in the Java environment, providing both client- and server- side scripting that fits synergistically with Java.

Finally, this chapter addressed how to resolve any conflicts that might occur when installing more than one Rexx interpreter on the same machine. Conflicts rarely occur, but when they do, they can easily be resolved.

With this chapter laying the groundwork, let's discuss the organization of the remainder of the book. Chapters 20 through 30 describe different Rexx interpreters. Each chapter focuses on a different interpreter and describes its advantages, the platforms it supports, and its unique "personality." The chapters describe the features each interpreter offers beyond the Rexx standards and illustrate many of these extensions through sample scripts. The goal of these chapters is to take you beyond classic Rexx and into the realm of advanced scripting. You'll improve your scripting and also become privy to the advanced and interpreter-and platform-specific aspects of the language.

Several of the upcoming chapters cover specific kinds of programming. For example, three chapters address object-oriented Rexx scripting. They include an object-oriented tutorial that leverages your knowledge of classic Rexx to take you into the world of object-oriented programming. Two other chapters cover single board computers and Android cell phone programming. Yet another chapter focuses on NetRexx, a Rexx-like language that complements Java. NetRexx fits into the Java environment and runs under the Java Virtual Machine. And one chapter summarizes Rexx as the predominant mainframe command language. Several appendices also specifically discuss aspects mainframe programming in detail.

Let's go forward and learn about the various Rexx interpreters and how they apply to a wide range of platforms and programming problems.

Test Your Understanding

- 1. If you wanted a fast-running Rexx for a single board computer, which would you pick? Which interpreter runs on the most platforms? Which offers a complete set of Windows GUI functions? Which offers extensions for Linux, Unix, and BSD?
- 2. What are the major Rexx standards? To which do the free Rexx interpreters adhere? What is SAA and what was its impact on the standardization of Rexx?
- 3. What are Open Object Rexx and roo! and what are their benefits? Could you run a standard Rexx script under these interpreters? Would it make sense to do so? How do Open Object Rexx and roo! differ? Which is(are) free under: Windows? Linux? Unix?
- 4. What is NetRexx and how is it used? Does NetRexx meet the Rexx standards? Can you access Java classes from NetRexx? Could you write Java classes in NetRexx?
- 5. Which open source Rexx not only meets all standards but includes the interpreterspecific extensions of the other free Rexx interpreters?
- 6. Which Rexx interpreters run on Android cell phones?
- 7. Why use an emulator with Rexx?

Regina

Overview

Regina is the most widely used free Rexx interpreter. Its use is truly worldwide: it was originally developed by Anders Christensen of Norway in the 1990s and is today enhanced, maintained, and ported by Mark Hessling of Australia. Regina's popularity is well deserved. It meets all Rexx standards and goes well beyond them in the features and functions it offers. It runs on nearly any platform. Some of its many advantages were presented in the first chapter, when we described why it is an excellent choice of Rexx interpreter.

This chapter explores those aspects of Regina that go beyond the ANSI standards to give you a feel for the extra features of this product. Since Regina meets all Rexx standards, of course, everything from the tutorials of the earlier chapters of this book apply to your use of Regina. In fact, all the sample scripts to this point were tested with Regina in its role as a standards-compliant Rexx interpreter. The goal here is a bit different. This chapter specifically explores the Regina features that go above and beyond the Rexx standards.

First, we'll cover the advantages of the Regina interpreter. Then we'll discuss when and why it may be appropriate to employ the features of Rexx interpreters that extend beyond the standards, and what the downsides of this decision are. Different projects have different goals, and you want to be appraised as to when using interpreter features beyond those of the Rexx standards is advisable.

This chapter describes Regina's extended features. These include its many operands for the options instruction, additional functions (for bit manipulation, string manipulation, environmental information, and input/output), facilities for loading external function libraries, the stack and its uses, and the SAA API. Let's dive in.

Advantages

In deciding whether to use any particular Rexx interpreter, you'll want to know what the benefits to the product are. Do its strengths match your project's needs? This section attempts to answer that question for the Regina Rexx interpreter. This chapter lists and discusses many of the product's stengths. The chapters that follow this one present the same information for other Rexx interpreters including Rexx/imc, Reginald, BRexx, r4, and roo!, Open Object Rexx, ooRexx for Android, mainframe Rexx, and NetRexx. A separate chapter covers each interpreter, and each chapter begins with a list of the product's special strengths, similar to the one given here. Use these lists as your "starting point" in deciding which Rexx interpreter is right for any particular situation or project.

With this said, let's discuss the strengths of Regina. Figure 20-1 pictorially summarizes many of Regina's advantages as a Rexx interpreter.

Runs Everywhere Many tools & interfaces Proven Open source Rexx API Free Proven maintenance record Detailed documentation International languages Largest user community Compatible w/other Rexxes Meets all standards SAA Support

Figure 20-1

Let's discuss these advantages in more detail.

- Regina runs anywhere Rexx is a platform-independent language, and Regina proves the point. Regina runs on any operating system in all the predominant OS families: Windows, Linux, Unix, BSD, macOS, and BSD. It even runs on a very wide variety of less popular systems. Regina runs on most of the platforms listed for Rexx interpreters in the tables in Chapter 1.
- □ Regina meets all standards Regina fully meets the ANSI-1996 standards and conforms to the SAA, TRL-2, and TRL-1 standards as well. The product's detailed documentation provides precise explanations of the differences between these standards.
- ☐ Regina has a large support community Regina's large worldwide user base means that this implementation has the largest support community. If you post a Rexx question on the Internet, chances are the response will come from someone using Regina. Also, Regina has a strong, proven track record for support.

Regina boasts tools and interfaces — As the most popular free Rexx, most Rexx tools are written for and tested with Regina. Open-source interfaces that work with Regina include those for relational databases, the Tk and DW GUI toolkits, the gd library for graphics, the THE editor, ISAM access method, Curses for standard screen I/O, CURL for URL support, and many others.
Regina offers compatibility with other Rexxes — Regina includes features and functions that go beyond the standards to provide compatibility with other Rexx implementations. We call this Regina's supercompatibility. Take issuing operating system commands, for example. Regina supports ANSI-standard redirected I/O via the address instruction. It also allows the address instruction to use the stack, as in mainframe and other Rexxes. Where Rexx implementations differ, Regina supports all the approaches and lets the developer choose which to use.
Regina includes functions from other Rexxes — As part of its supercompatibility, Regina includes implementation-specific functions matching those supplied by VM mainframe Rexx, the SAA standard, Amiga ARexx, and OS/2 Rexx.
Regina offers detailed documentation — Regina's documentation is probably the most comprehensive and detailed of any free Rexx interpreter. Its documentation goes far beyond the required and includes detailed discussions of conditions, I/O, extensions, and the stack. It includes a large section on the Rexx SAA API, which explains to developers how they can call Regina as a set of external routines.
<i>Regina is open source.</i> Regina is open source and is distributed under the GNU Library General Public License. Not all free Rexx interpreters are also open source.
Regina supports the REXX API — Regina is implemented as a library based on the standard Rexx application programming interface, or API. It interfaces to programs written in other programming languages based on this clean, well-documented interface. With this interface, for example, you could code C or C++ programs that employ Regina as a set of Rexx functions.
Regina is international — Regina supports several spoken languages, including English, German, Spanish, Portuguese, Turkish and Norwegian.
Regina uses DLLs and shared libraries. Regina includes the Generic Call Interface, or GCI, which allows scripts to call functions in Windows DLLs or Linux/Unix/BSD/macOS shared libraries as though they were Regina built-in functions. This gives Regina scripts full access to external code of all kinds for Windows and Linux- and Unix- derived systems (even though that code was not specifically written to be invoked from Rexx scripts).
<i>Regina is thread-safe</i> — This allows it be used by applications like the Apache Web server which use threads for superior performance.
Regina supports "superstacks" — Regina's stack services extend way beyond the required or expected. As described in Chapter 11, Regina's external queues can be used for communications between different processes on the same computer, different processes on different computers, or even between different processes across the Internet.

Regina's Extras

Chapter 1 discussed where to download Regina from and how to install the product. The chapters following that one presented a progressive tutorial on how to script with standard Rexx. All this material applies to Regina, and all the sample programs up to this point were tested using Regina. Now it's time to explore the extended features of Regina. This figure summarizes them:

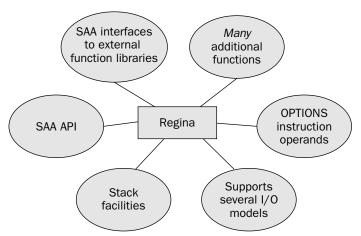


Figure 20-2

The extended Regina features include interpreter options, additional functions, and features for compatibility with other Rexx interpreters and platforms. These additions beyond the Rexx standards offer great power and are a strong advantage to Regina. But always carefully consider whether you wish to code beyond the Rexx standards. Coding within the standards ensures the highest degree of code portability. It ensures that others who know Rexx will be able to work with your code. Coding outside the standard subjects your scripts to a greater risk of desupport. Standard Rexx will enjoy use and support forever, whereas the extensions of any specific interpreter will always be subject to greater risk. We generally recommend always coding with the Rexx standards. Including this extended material in this and subsequent chapters on Rexx interpreter extensions is not meant to promote the use of these extensions. It is, rather, intended to provide introduction and reference to the extensions for those who may need them and understand both their benefits and their drawbacks.

There are very good reasons for Rexx interpreter extensions. They offer platform-specific features and power that can be very useful for scripts that will run in specific environments. They also support cross-platform portability in ways not possible otherwise. As one example, porting mainframe scripts to other platforms may be easier when the interpreter on the target platform supports mainframe Rexx extensions. As another example, programmers familiar with the I/O model of other programming languages may prefer the C-like I/O offered in many Rexx extensions to the standard Rexx I/O model.

The bottom line is this: use nonstandard Rexx extensions if you need them for some reason, and you have considered any potential downsides and have judged them acceptable. With this said, let's enumerate and discuss Regina's extended features.

Interpreter options

Recall that the options instruction allows you to issue commands to the Rexx interpreter. These options dynamically alter the interpreter's behavior. What options are available depend strictly on the Rexx interpreter. Regina's options instruction includes about two dozen parameters that scripts set to alter or direct the interpreter's behavior. These key ones dictate compatibility with various platforms and standards:

Option	Result	
CMS	Enables the set of extensions expected in the VM/CMS mainframe environment	
UNIX	Enables Unix command interface functions. This increases performance over using the command interface to issue shell commands	
VMS A set of interface functions to the VMS operating system. This makes it possible to script the same kinds of actions in Regina Rexx on VMS as one writes in VMS's DCL language		
BUFFERS	Makes all VM-based buffer functions available to manipulate the stack	
AREXX_BIFS	Makes all ARexx built-in functions available	
REGINA	Language level 5.00 plus Regina extensions are available	
ANSI	Conform to language level 5.00	
SAA	Conform to SAA standards	
TRL2	Conform to TRL-2 standards	
TRL1	Conform to TRL-1 standards	

Regina includes other options beyond those listed. We do not mention them here because most direct the interpreter in very specific ways or towards implementing very specific features. Often these control the internal behaviors of the interpreter. The options listed in the table manipulate the more specific options as groups of behaviors in order to gain compatibility with specific environments or standards. If you need to investigate the low-level options, the Regina documentation spells them out in detail.

Functions

As an ANSI-1996 compliant Rexx, Regina has all standard Rexx instructions and functions. Appendices B and C list these language elements in reference format with a coding level of detail. In addition, Regina offers functions that go beyond the standards. Regina's extra functions naturally group into several categories:

- ☐ Bit manipulation
- ☐ String manipulation
- ☐ Environmental
- ☐ Input/output
- □ SAA interface to external function libraries
- ☐ Stack manipulation

These functions originated from a number of platforms and other Rexx interpreters. The following table lists Regina's extended functions and shows from which version of Rexx each is derived:

Chapter 20

Origin	Functions
AREXX	b2c, bitchg, bitclr, bitcomp, bitset, bitttst, c2b, close, compress, eof, exists, export, freespace, getspace, hash, import, open, randu, readch, readln, seek, show, storage, trim, upper, writech, writeln
SAA standard	rxfuncadd, rxfuncdrop, rxfuncerrmsg, rxfuncquery
Regina	cd, chdir, crypt, fork, getenv, getpid, gettid, popen, uname, unixerror, userid
VM (aka CMS)	buftype, desbuf, dropbuf, find, index, justify, makebuf, sleep, state
OS/2 Rexx	beep, directory, rxqueue

Appendix D alphabetically lists all Regina-specific functions with detail suitable for reference and coding. It includes coding examples of the use of each function.

In the next several sections, you'll learn about each group of functions. The goal here is simply to familiarize you with the names of the functions and what they do. For a complete alphabetical list of functions with full coding details, see Appendix D.

Bit manipulation

Bit manipulation refers to the ability to inspect and alter individual bits. Usually, the bits are manipulated in groups of 8 (one character or byte) or 4 (one hexadecimal character). Chapter 6 on strings briefly considered why bit string manipulation can be useful, while Chapter 7 offered a sample script that performed key folding based on bit strings.

Standard Rexx offers a set of bit manipulation functions that include bitand, bitor, and bitxor. These are backed up by bit conversion functions like b2x and x2b. Regina extends this power by adding another group of bit functions, all derived from Amiga Rexx, a Rexx interpreter that was the bundled standard with the Amiga personal computers. These functions are very useful when intense bit-twiddling is called for.

To access all of these functions, you must enable the options instruction string AREXX_BIFS, like this:

```
options arexx_bifs
```

Here are the extra functions available:

Bit Manipulation Function	Use
b2c	Returns a character string for a binary string input
bitchg	Toggles a given bit in the input string
bitclr	Sets a specified bit in the input string to 0
bitcomp	Compares two strings bit by bit, returns -1 if identical or the bit position of the first bit by which the strings differ

Bit Manipulation Function	Use
bitset	Sets the specified bit to 1
bittst	Returns the state of a specified bit in the string (either it is 1 or 0)
c2b	Converts the character string into a bit string

String Manipulation

String manipulation is even more vital than bit manipulation, as amply pointed out in Chapter 6. Regina offers a grab-bag of extra string functions. A few, like find, index, and justify, have mainframe origins. These all have more standard equivalents, yet their inclusion is useful for mainframe compatibility or for rehosting mainframe scripts.

Others of the string functions are just very useful and one wishes they were part of standard Rexx. hash returns the hash attribute of a character string, while crypt returns the encrypted form of a string.

This table lists the extended Regina string manipulation functions. Where a function has a direct standard Rexx equivalent, we have cited that equivalent. One should always code the standard Rexx function if feasible:

String Function	Use	Standard Alternative Function
compress	Compresses a string by removing any spaces, or by removing any characters not in a given list	_
crypt	Takes a string and returns it encrypted	_
find	Finds the first occurrence of a word in a string	wordpos
hash	Returns the hash attribute of a string	_
index	Returns the position of the needle string in the haystack string	pos
justify	Spaces a string to both right- and left-justify it	right or left or space
lower	Translates the string to lowercase	_
trim	Removes trailing blanks from a string	strip
upper	Translates string to uppercase	translate

Environmental functions

The environmental functions offer a plethora of operating system services and also retrieve information about the environment. Some of these functions are inspired by the PC platform, such as beep, cd or chdir, import, export, rxqueue and storage. Others obviously come from Unix, such as fork, getenv, getpid, gettid, popen, uname, unixerror, and userid. In all cases, the goal is the same: to provide operating system services to Rexx scripts.

Here are the environmental functions Regina adds to standard Rexx:

Environmental Function	Use
beep	Sounds the alarm or a "beep"
cd and chdir	Changes current process's directory to the specified directory
directory	Returns the current directory, or sets it to the given directory
export	Copies data into a specific memory address
fork	Spawns a child process
freespace	Returns a block of memory to the interpreter; inverse of getspace
getenv	Returns the value of the input Unix environmental variable
getpid	Returns the scripts process ID, or PID
getspace	Gets or allocates a block of memory from the interpreter
gettid	Returns the thread ID, or TID of the script
import	Reads memory locations
popen	Execute a command and capture its results to an array; superceded by the address with instruction
randu	Returns a pseudo-random number between 0 and 1
rxqueue	Controls Regina's queue function; creates, deletes, sets, or gets queues
show	Shows items in Amiga or AROS resource lists
sleep	Script sleeps for the designated number of seconds
state	Returns 0 if the steam exists, 1 otherwise
storage	With no arguments tells how much memory a system has, or it can return contents or even update (overwrite) system memory
uname	Returns platform information, including OS name, machine name nodename, OS release, OS version, and machine's hardware type
unixerror	Returns the textual error message that corresponds to a Unix operating system error number
userid	Returns name of the current user

Input/output

Regina Rexx supports several I/O models. First, there is standard Rexx steam I/O, embodied in such built-in functions as chars, charin, charout, lines, linein, and lineout. This model is simple, standardized, compatible and portable.

Since some Rexx interpreters are actually implemented as C-language programs, they have added C-like I/O. The "C-language I/O model" provides a little better control of files because they can be explicitly opened, closed, positioned, and buffer-flushed. The *mode* a file is opened in (read, write, or append) can be specified. Direct access and explicit control of the read and write file positions is provided through the seek function.

AREXX on the Amiga and the portable, free BRexx interpreter (see chapter 22) are known for supporting the C-language I/O model. Regina does too. Regina offers it as a more powerful but less standard alternative to regular Rexx I/O. Here are these additional built-in, C-like I/O functions:

I/O Function	Use
close	Closes a file
eof	Tests for end of file; returns 1 on eof, 0 otherwise
exists	Tests whether a file exists
open	Opens a file for appending, reading, or writing
readch	Reads the specified number of characters from the file
readln	Reads one line from the file
seek	Moves the file pointer to an offset position, and returns its new position relative to the start of the file
writech	Writes the string to the file
writeln	Writes the string to the file as a line

Regina's stream function supports all the ANSI-mandated information options, as discussed in Chapter 5 on input/output. The ANSI-1996 standard also permits implementation-specific commands to be executed through the stream function. In Regina these commands include the full range of options to control file modes, positioning, flushing, opening, closing, status, and other operations.

In addition to standard stream I/O and C-like I/O, Regina can take advantage of several external packages for sophisticated data storage needs. For example, the Rexx/SQL package supports connections to a wide variety of databases including Oracle, DB2, SQL Server, MySQL, PostreSQL, and others. Chapter 15 illustrates Regina with the Rexx/SQL interface to relational databases. Another example is the open-source Rexx/ISAM package, which supports an indexed access method (ISAM).

Access to function libraries

Many free and open-source interface packages come in the form of external function libraries. Examples include the products discussed in Chapters 15 through 18, such as Rexx/Tk, Rexx/DW, Rexx/gd, RexxXML, and others. Many of the Rexx tools and interfaces listed in Appendix H also come in the form of external function libraries.

Let's discuss how Rexx interpreters access these libraries of external functions. Regina makes a good example of how to do this because it uses the Systems Application Architecture, or SAA, standards for this purpose. Several other Rexx interpreters use the SAA standards as their interface mechanism, too.

Rexx external function libraries come in the form of *shared libraries* for Unix, Linux, and BSD operating systems. For Windows systems they are *Dynamic Link Libraries* (DLLs).

Let's discuss Unix-derived operating systems such as Linux, Unix, and BSD first. For Unix-derived operating systems, external function libraries typically have names in one of these forms:

Library Name Pattern	System
libso	All Linuxes and most Unix-derived operating systems other than those specified below
libsl	HP/UP
lib .a	AIX
libdylib	macOS

The underscores are replaced by the name of the library. For example, under Linux for a library called funpack, it would be in the file libfunpack. so. Be sure to read the documentation for any product you download, as library names can vary.

You configure your system for access to the external function libraries by setting an environmental variable. This specifies the directory that contains the function library to use. Here is the name of this environmental variable for several popular Unix-derived operating systems:

Environmental Variable that Points to Shared Library Files	System
LD_LIBRARY_PATH	All Linuxes and most Unix-derived operating systems other than those specified below
LIBPATH	AIX
SHLIB_PATH	HP/UX
DYLD_LIBRARY_PATH	macOS
LD_LIBRARYN32_PATH	SGI

The "install notes" for Regina and the external library products typically list the names of this environmental variable for all Unix-derived operating systems, as needed. Be sure to consult the documentation that downloads with the product for any changes or product-specific information.

The meaning of all this is, if you get a "not found" error of some sort when first setting up Rexx under Unix, Linux, or BSD, or when first trying to access an external function library, make sure that the proper environmental variable is set correctly.

On Windows operating systems, the DLLs are the equivalent of Linux/Unix/BSD shared libraries. Windows DLLs reside in folders specified in the PATH environmental variable. The system shared DLL folder is typically either C:\Windows\System or C:\Windows\System32, depending on the version of Windows. The external function library DLL can alternatively reside in any other folder, as long as you make the folder known to Windows through the PATH specification.

You install the Windows DLL or Linux/Unix/BSD library file and point to it with the proper environmental variable by interacting with the operating system. Then, from within Regina scripts, you use the SAA-defined standard functions to give scripts access to these shared libraries or DLLs containing external functions. The built-in functions to use are:

SAA Function	Use
rxfuncadd	Registers an external function for use in the current script
rxfuncdrop	Removes the external function from use
rxfuncquery	Returns 0 if the external function was already registered (via rxfuncadd) or 1 otherwise
rxfuncerrmsg	Returns the error message that resulted from the last call to rxfuncadd This function is a Regina-only extension.

Here's an example that uses these functions to register external functions for use by a script. In this example, the script sets up access to the external Rexx/SQL function library. The first line below uses the RxFuncAdd function to load (or "register") the external function named SQLLoadFuncs. The next statement then executes the SQLLoadFuncs function, which loads the rest of the Rexx/SQL external function library.

```
if RxFuncAdd('SQLLoadFuncs','rexxsql', 'SQLLoadFuncs') <> 0 then
    say 'rxfuncadd failed, rc: ' rc

if SQLLoadFuncs() <> 0 then
    say 'sqlloadfuncs failed, rc: ' rc
```

The name of the external library is encoded in the second parameter of RxFuncAdd. In this case it is rexxsql.rexxsql is the root of the filename of the file containing the external functions. For example, under Windows, the full filename is rexxsql.dll. Under Linux it would be librexxsql.so. SqlLoadFuncs is the name by which this script will refer to that external library file.

The preceding code loads the Rexx/SQL external function library for use, but the same pattern of instructions can be used to load a wide variety of other external libraries for use by scripts. For example, Chapter 16 described how this code applied to Rexx/Tk, Rexx/DW, Rexx/gd, and other interfaces. Here is how the sample Rexx/Tk script in Chapter 16 coded access to the external Rexx/Tk function library.

Stylistically, the code varies a little from the preceding example, but the same pattern of two functions is coded in order to access and load the external function library:

```
call RxFuncAdd 'TkLoadFuncs','rexxtk','TkLoadFuncs'
if TkLoadFuncs() <> 0 then say 'ERROR- Cannot load Rexx/Tk library!'
```

To summarize, we've discussed how to set up an external function library for use from within Regina scripts. Then, we've seen the SAA functions you encode from within the Regina scripts to set up their access to the external function library. Other SAA-conformant Rexx interpreters access external packages in this same manner.

The stack

Regina supports all ANSI-1996 keywords on the address instruction for performing input/output to and from commands via streams and arrays. These keywords include input, output, and error for specifying redirection sources and targets, and stream and stem, to define whether the I/O goes to a file or array.

Regina also permits the use of the stack for command I/O. In this it follows the lead of mainframe Rexx and many other implementations.

The script in the section entitled "Using the Stack for Command I/O" in Chapter 11 showed how to send lines to a command through the stack and retrieve lines from the stack using Regina. In addition, these Regina built-in functions can be used to create or destroy new stack buffers:

Stack Function	Use
makebuf	Create a new stack buffer
dropbuf	Removes buffer(s) from the stack
desbuf	Destroys all stack buffers
buftype	Displays all stack buffers (usually used for debugging)

To use these function, a script would normally begin by creating its own stack area through the makebuf function. This function could be called repeatedly if there were a need for more than one stack buffer. The script would invoke the dropbuf function to release any buffer after it is no longer needed. Or if stack processing is complete, the desbuf function will destroy all extant stack buffers. The buftype function is used mainly for debugging if problems occur. It displays the contents of all the stack buffers extant at the time it is called.

As mentioned in Chapter 11, Regina permits an innovative use of the stack, through its "external queue capability." The stack can function as an interprocess communication facility between different processes on the same machine, or between different processes on different machines. The facility even supports communication between processes across the Internet. This goes well beyond the role of the stack as an external communications data queue as supported by many other Rexx interpreters.

To use Regina's extended external queue capabilities, install and start its stack service. Check out the rxstack and rxqueue executables. Use the rxqueue extended function to manage and control the stack from within Regina scripts.

Regina's SAA API

Regina fully meets the SAA application programming interface, or API definition. It is implemented as a library of routines that can be invoked from an external program. This library module could be either statically or dynamically loaded. What this means is that you could develop code in some other language, say C or C++, then link into Regina and use Rexx as a library of functions and subroutines.

Regina's documentation provides a full explanation of how to do this. It tells programmers what they need to know to use the Regina API. Of course, because it is written for programmers, the guide is technical. It uses C-language syntax to explain the interface.

Sample Scripts

Subsequent chapters on other Rexx interpreters include sample scripts that demonstrate the specific features of those interpreters and were run using them. We felt it was not necessary to include Reginaspecific scripts in this chapter for two reasons:

- ☐ The sample scripts in all chapters to this point were run and tested with Regina
- □ Subsequent chapters that demonstrate interpreter-specific features are often coded in a similar manner to how those features would be coded using Regina. Regina's *supercompatibility* means that many of the special features and functions in those scripts are included and available from within Regina

Subsequent chapters give many examples of how extended functions can be used in Rexx scripts. Appendix D provides a complete coding-level reference to all of Regina's extended functions.

Summary

This chapter summarizes the features of Regina that go beyond the Rexx language standards. Regina provides functions that duplicate most of the extensions found in other Rexx implementations. Specific features we described in this chapter include Regina's extra operands for the options instruction, its additional functions, how one accesses external function packages using Regina, and the SAA API and its role with the Regina interpreter. Regina's extra functions are extensive, covering bit manipulation, string manipulation, environmental information and control, and input/output. We also described Regina's external queue facility, or stack, and how it can be used as a generalized communications vehicle between processes regardless of their location.

When considering whether to use the extended features of Regina (or those of any other Rexx interpreter), one must be fully cognizant of both the benefits and the drawbacks of this decision. Power and flexibility are the advantages, but the loss of standardization can be the downside. Each project or organization has its own goals. These must be measured against the benefits and costs of using the extended features.

Regina is one of the world's premier Rexx interpreters. It is the most popular open-source Rexx. It runs on almost any platform. More developers use Regina than any other free Rexx interpreter, with the result that more tools are tested with it and its support community is larger.

The next several chapters take a look at other Rexx interpreters. Those chapters spell out the strengths and applications of the other interpreters. Some of the interpreters specialize in certain operating systems or platforms, while others extend Rexx in entirely new directions. Examples of the latter include roo! and Open Object Rexx, which support object-oriented scripting, and NetRexx, which brings Rexx into the world of Java and the Java Virtual Machine. Stay tuned. . . .

Test Your Understanding

- **1.** What are Regina's major advantages? What platforms can it run on? Can it run on any version of Windows, Linux, Unix, BSD, and macOS?
- **2.** What are the uses of the stack in Regina? Can you use it to send input to and receive output from operating system commands? Can you send input to and receive output from OS commands using ANSI-standard keywords?
- **3.** What functions are available in Regina's C-like I/O model? Which do you use to read and write strings with linefeeds, as opposed to those that read and write strings without line terminators? How do you:
 - ☐ Explicitly close a file
 - ☐ Test for end of file
 - ☐ Move a file pointer to a specific position
- **4.** What is the SAA API? Of what value to programmers is it that Regina fulfills the SAA API? What SAA-based functions do you use to register an external function for use? How do terminate use of an external function?
- **5.** What compatibility parameters can you set on the options instruction?

Rexx/imc

Overview

Rexx/imc is a standard Rexx for BSD, Unix, and Linux platforms. Written by Ian Collier of England, some of the systems it is used on include all BSD distributions, all Linux distributions, Oracle Solaris, AIX, HP/UX, Digital Unix, and IRIX.

Rexx/imc is at language level 4.00 and meets the TRL-2 standard. This chapter covers product installation and the extended Rexx/imc features that go beyond the Rexx standards. These features give you power beyond the confines of standard Rexx but are, of course, less portable across interpreters and platforms.

This chapter lists and discusses the strengths of Rexx/imc. Then it details how to install the product using popular package managers, and also from source code.

After this we describe the extended features of the product. These include functions for retrieving environmental information, higher mathematics, SAA-based access to external function libraries, and C-language-style file I/O. We illustrate the special features of Rexx/imc within the contexts of two sample scripts. The first demonstrates some of the product's functions for retrieving environmental information, while the second shows how to use its C-like I/O functions. Let's start by reviewing Rexx/imc features.

Advantages

As we've mentioned, each chapter that covers a particular Rexx interpreter begins by listing and discussing the unique aspects of that interpreter. Here are some key points about Rexx/imc:

<i>Meets standards</i> — Rexx/imc is at language level 4.00 and meets the TRL-2 standard
<i>Unix-oriented extras</i> — Rexx/imc offers a number of Unix-oriented features beyond the standard. These include C-like I/O functions and Unix-specific environmental-information functions.

Additional functions — Rexx/imc includes a set of a dozen mathematical functions and the SAA- based functions to load and manage external functions.
Clear documentation — Rexx/imc includes clear, complete documentation. It comes with a nice Rexx tutorial for beginning programmers. It includes a useful reference summary as well as a complete reference manual.
<i>Reliable, well proven</i> — The interpreter has been used for two decades and is well proven. It has a long track record and is well known and respected in the Rexx community.

Installing Rexx/imc

Rexx/imc can be freely downloaded from several sites. These include Pkgs.org at https://pkgs.org/download/rexx-imc, the Rexx information website at RexxInfo.org, and Ian Collier's website https://www.cs.ox.ac.uk/people/ian.collier/Rexx/rexximc.html. Since Web addresses sometimes change, just search for the keyword Rexx/imc or Rexx-imc on Google if you need to.

Rexx/imc is distributed in several formats, including RPM Package Manager (.rpm) files, and BSD packages (.pkg).

If your system has a Package Manager to install such files, merely double-click on them to install Rexx/imc.

After the install, be sure to read any installation notes, such as may be contained in **README** or **INSTALL** files. For example, you may need to set your PATH variable to include the directory of the Rexx/imc executable. And you may also need to set your load library environmental variable to give Rexx/imc access to its shared library file. The notes will give you any commands you need to accomplish this.

Installing From Source Code

If you downloaded a .tgz or .tar.gz file, you'll be building Rexx/imc from its source code.

First, double-click on the download file to decompress it. If it creates a .tar file, double-click again to decompress the .tar file. You'll know you're done decompressing when you see a long list of decompressed files fly by.

Navigate to the directory into which you decompressed the source code, and look for any **README** or **INSTALL** files. Read those instructions, as they may contain operating system specific information you'll need for a successful install.

Then, open a terminal, switch to using the root user id, and navigate to the directory into which you decompressed the source code download. Issue these commands as root:

```
./configure make make install
```

These commands configure and install the product. Since they compile source code, they require a C compiler to run. Almost all Linux, Unix, and BSD machines will have a C compiler present. If your system does not have one installed, download a free compiler from any of several sites including www.gnu.org. For macOS, go to the Apple Store and download Xcode.

As in the package install, you should read any **README** files or install notes. They will likely tell you to set two environmental variables. The PATH should be set to include the Rexx/imc executable. And the library path variable should be set to include a pointer to Rexx/imc's shared library file.

This chart lists where Rexx/imc components typically reside. These vary by distribution, but most often the directories are as follows:

Directory	Contains
/usr/bin	Location of Rexx/imc interpreter
/usr/lib	Shared library location
/usr/man/man1	Location of the help files and documentation
/usr/share/doc	Documentation, tools, services, libraries, and so on
/usr/share/doc/rexx-imc	Documentation for Rexx/imc including installation info

Based on this table, you would expect to ensure that your PATH variable contains /usr/bin, and that your shareable load library environmental variable includes /usr/lib.

A good way to verify that the package installed correctly is to run the rexxcps benchmarking program. Or create and run your own test script. Start your favorite editor and enter this three-line test program:

```
#!/usr/bin/rexx
/* a simple Rexx test program for Rexx/imc */
say 'hello'
```

The first line should refer to the fully qualified directory name where the Rexx/imc executable is installed. Save this code under the filename testme.rexx, then change the permission bits on that file such that it is executable:

```
chmod +x testme.rexx
```

Now you can execute the script:

```
rexx ./testme.rexx or ./testme.rexx
```

If you add the current directory to your PATH environmental variable, you can exclude the leading two characters ./ and just run the script by entering its name:

testme.rexx

Features

Rexx/imc fully conforms to the language level 4.00 standard defined by TRL-2. Beyond this, it includes additional functions, instructions, and features specifically oriented towards the Unix, Linux, and BSD environments.

Rexx/imc extends standard Rexx by adding a number of extra built-in functions. Figure 21-1 pictorially represents the categorization of these extra functions.

Let's enumerate and discuss the extended functions with their coding formats so that you can see what they offer. First, the Rexx/imc Unix-specific functions provide scripts information about their environment. All provide features Unix- and Linux- based programmers expect:

Environmental Function	Use
chdir(directory)	Change the current directory to a new directory
getcwd()	Returns the current working directory
getenv(name)	Get the value of the specified environmental variable
putenv(string)	Set the value of an environmental variable
system(s)	Return the output of a shell command
userid()	Get the process owner's login name

Rexx/imc's Additional Functions

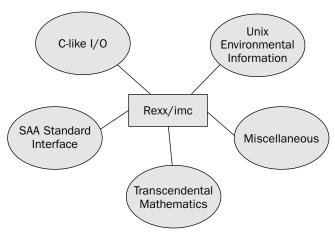


Figure 21-1

The Rexx/imc mathematical functions support transcendental mathematics. These functions are very similar to those you'll find in other extended Rexx interpreters, for example, BRexx, and Reginald. Recall that several add-on packages also include higher math functions. These include the Internet/REXX HHNS Workbench, discussed in Chapter 17, and several of the packages listed in Appendix H. Here are the Rexx/imc higher math functions:

Mathematical Function	Use
acos(n)	Arc-cosine
asin(n)	Arc-sine
atan(n)	Arc-tangent
cos(n)	Cosine of <i>n</i> radians
exp(n)	The exponential of n
ln(n)	The natural log of n
sin(n)	Sine
sqrt(n)	Square root
tan(n)	Tangent
topower(x,y)	Raise x to power y

Rexx/imc supports the three IBM Systems Application Architecture (SAA) functions for loading the using external functions. These are the same functions included in other Rexx interpreters, for example, Regina:

SAA Interface Function	Use
rxfuncadd(rexxname,module,sysname)	Load (register) an external function
rxfuncdrop(function)	Drop an external function
rxfuncquery(function)	Query whether a function is loaded

Code these functions in the same manner shown in the examples in Chapters 15 through 18 in order to access external functions from Rexx/imc. The standard SAA calling interface makes a wide variety of open-source interfaces available for use with Rexx/imc.

Rexx/imc offers a few additional miscellaneous functions. These support mainframe Rexx-style text justification and conversions between binary and decimal:

Miscellaneous Function	Use
<pre>justify(s,n [,pad])</pre>	This function justifies text to a given width. (It is similar to the mainframe VM/CMS Rexx justify function).
b2d(binary)	Convert binary to decimal
d2b(decimal)	Convert decimal to binary

In addition to its extra built-in functions, Rexx/imc enhances several instructions with additional convenience features:

- sayn instruction writes a line without a carriage return (i.e., no *linefeed* or *newline*)
- □ select *expression* instruction implements the Case construct, depending on a variable's value
- $oldsymbol{\square}$ parse value instruction parses multiple strings (separated by commas) in one instruction
- procedure hide instruction explicitly hides global variables from an internal routine
- Arrays may be referenced by calculations. For example, you can code stem.(i+1), whereas in standard REXX you must write j=i+1 followed by stem.j.

Rexx/imc accepts any nonzero number for TRUE (not just 1). This means you can code C-style operator-less condition tests, where a function that returns any nonzero value evaluates to TRUE:

```
if my_function() then
  say 'The function returned TRUE (any nonzero value)'
```

Recall that under standard Rexx, a condition must evaluate to either 1 (TRUE) or 0 (FALSE). In standard Rexx, a nonzero value other than 1 is not acceptable and causes a runtime error.

Finally, Rexx/imc includes a stack that is used in traditional Rexx fashion. It can be used to communicate data between Rexx programs and between routines within a program. It supports all the stack manipulation instructions (queue, push, pull, and parse pull), and the queued function to retrieve the number of items on the stack.

The C-language I/O Model

Like other open-source Rexx interpreters, Rexx/imc offers several functions beyond the Rexx standard to implement C-language style input/output. In the *C I/O model*, you explicitly open a file for use by the open function. The *mode* in which the file is opened determines whether it is used for reading, writing, or *appending* (adding data on to the end of a file). After use, explicitly close the file by the close function.

Here are the additional Rexx/imc functions for C-language I/O. We have included their coding formats so that you can see what parameters each function requires:

I/O Function	Use
<pre>open(file [,[mode] [stream]])</pre>	Explicitly opens a file in the specified mode
close(stream)	Closes a stream
fileno(stream)	Returns the <i>file descriptor</i> (or £d) number of a stream
ftell(stream)	Returns the current file pointer
<pre>fdopen(fd [, [mode] [,stream]])</pre>	Open a fd number. Used for accessing files which have already been opened by another program.
<pre>popen(command [,[mode] [,stream]])</pre>	Opens a pipe to a shell command
pclose(stream)	Closes a pipe (opened by the popen function)
<pre>stream(stream [,[option] , [command]])</pre>	Directly control file or stream operations through some 15-plus commands. Among them are flush, advanced open modes, and query for information.

The C I/O model offers greater control of file input/output, at the cost of less standardized code. Explicit control could be useful, for example, to close and reopen a file within a script, or when a script opens so many files it needs to close some to reclaim memory. Of course, Rexx/imc supports standard Rexx I/O as well.

Rexx/imc allows you to open a *pipe* to a shell command through the popen function and to close the pipe by the pclose function. The pipe is an in-memory mechanism for communication between the Rexx script and the shell command. Along with the system function this offers another mechanism for communication with operating system commands.

Interfaces and Tools

Since Rexx/imc is a standard Rexx interpreter that uses the SAA-standard functions for access to external function libraries, it interfaces to many packages and tools. One of the best known is The Hessling Editor (or THE), a Rexx-aware text editor that uses Rexx as its macro language. Another is Rexx/Curses, a library for screen I/O that gives applications a portable text-based user interface.

Other packages include Rexx/Tk, the cross-platform GUI toolkit, and RegUtil, an external function library. More information on these interfaces and tools is available at the Rexx/imc download webpages. Appendix H lists many additional free and open-source packages, tools, and interfaces.

A Sample Program — Environmental Information

The sample programs in this chapter were run under Linux (Red Hat). The first program illustrates several of Rexx/imc's environmental functions that extend beyond the Rexx standards. These include getcwd, chdir, getenv, system, and userid. The program also shows the results of the parse source and parse version instructions for Rexx/imc running under Linux.

Here is the output of the script named Environment:

```
[root /rexximc]$ ./environment.rexx
The initial directory is: /rexximc
The current directory is: /
The current directory is: /rexximc
The value of environmental variable USERNAME is: root

Uname is: Linux
Userid is: root
Default command environment is: UNIX
System: UNIX Invocation: COMMAND Filename: /rexximc/environment.rexx
Lang: REXX/imc-beta-1.75 Level: 4.00 Date: 25 Feb 2002
```

The full code of the program is shown here:

```
#!/usr/bin/rexx
/* ENVIRONMENT
/* This script uses some of Rexx/imc's unique environmental functions*/
/* It also shows results of PARSE SOURCE and PARSE VERSION.
/* change current directory to '/', display it, and change it back
                                                           */
                                                           */
                                      /* save current dir.
current dir = getcwd()
say 'The initial directory is:' current_dir /* show current dir.
                                                           */
                                    /* change directory
                                                           */
rc = chdir('/')
say 'The current directory is:' getcwd() /* display current dir. */
rc = chdir(current dir)
                                     /* change directory back */
```

```
say 'The current directory is:' getcwd() /* display current dir. */
                                                                     * /
/* display the value of environmental variable USERNAME
say 'The value of environmental variable USERNAME is: ' getenv('USERNAME')
/* Capture UNAME command result, display it, display owner's login
uname_result = system('uname')
                                           /* capture UNAME results */
sayn 'Uname is:' uname_result
                                           /* display UNAME results */
say 'Userid is:' userid()
                                           /* display user login */
/* display PARSE SOURCE, VERSION, for Rexx/imc under Red Hat Linux */
say 'Default command environment is: 'address()
parse source system invocation filename .
say 'System:' system ' Invocation:' invocation ' Filename:' filename
parse version language level date month year .
say 'Lang:' language ' Level:' level ' Date:' date month year
```

The first block of code in the script retrieves and displays the current directory with the <code>getcwd</code> function, changes the current directory to the root directory with the <code>chdir</code> function, then changes it back to the original directory with <code>chdir</code>. The script's output shows that the current directory was changed, and then altered to its original setting, through these special functions:

The script uses the getenv function to retrieve and display the value of the USERNAME environmental variable:

```
say 'The value of environmental variable USERNAME is:' getenv('USERNAME')
```

Rexx/imc also has a corresponding putenv function to set an environmental variable.

The script issues the Linux uname operating system command through the Rexx/imc system function, and captures and displays its output. This shows how to capture command output into the script via the system function. The special sayn instruction writes a string without a newline or linefeed character.

This avoids an extra blank line in the program output, because the Linux uname command output contained a newline character:

Rexx/imc alternatively allows you to code the system command and capture its feedback in this manner:

```
uname_result = 'uname'() /* capture the result of the UNAME command */
```

The script retrieves and displays the user's login id through the userid function:

```
say 'Userid is:' userid() /* display user login */
```

Finally, the script displays the default command environment by the address function, and issues the parse source and parse version instructions to display their results. The last three lines of the output disclose how Rexx/imc, and indeed, all standard Rexx interpreters, report on their environment and the language version.

A Sample Program — I/O

This sample program demonstrates the C-language-like input/output functions of Rexx/imc. The program accepts input and output filenames as command-line arguments, then simply copies the input file to the new file specified by the output filename. While copying, the script displays the read and write file pointer positions after each I/O operation.

Here is the input file of test data:

```
this is line 1
this is line 2
this is the last line
```

The program copies this file as is to the output and displays these lines on the screen while doing so:

```
[root /rexximc]$ ./fcopy.rexx fcopy_in.txt fcopy_out.txt
Input file position after read # 1: 16
Output file position after write # 1: 16
Input file position after read # 2: 31
Output file position after write # 2: 31
Input file position after read # 3: 54
Output file position after write # 3: 54
```

The output shows both the read and write file pointer positions after each I/O operation. Pointer positions include the line termination characters that occur at the end of lines. (Sometimes these are referred to as the *newline character* or as *linefeeds* or *LF*.) Remember that file positions always point to the *next* character position to read or write. Here is the script:

```
#!/usr/bin/rexx
/***************/
/* FCOPY */
```

```
/* Uses Rexx/imc I/O functions to copy a file.
                                                                    * /
                                                                    */
/* Reports file positions by the FTELL function.
/****************
                                                                    * /
parse arg source target
                            /* get filenames, retain lower-case
/* open input & output files, establish STREAM names
                                                                    */
rc_in = open(source,'r','in')
                                      /* open input file
                                                                    * /
                                     /* open output file
rc_out = open(target,'w','out')
                                                                    * /
if rc_in <> 0 | rc_out <> 0 then
                                     /* check for errors on open
                                                                   * /
   say 'File OPEN Error!'
/* perform the file copy, display file pointers as copying occurs
                                                                   * /
do j=1 while lines('in') > 0
   line = linein('in')
   say 'Input file position after read #' j || ': ' ftell('in')
   call lineout 'out', line
   say 'Output file position after write #' j || ': ' ftell('out')
/* close the files and exit
                                                                    */
                                    /* close input file
                                                                    */
rc_in = close('in')
rc_out = close('out')
if rc_in <> 0 | rc_out <> 0 then
rc_in = close('in')
                                    /* close output file
                                     /* check for errors on close */
   say 'File CLOSE Error!'
```

The script accepts two command-line input parameters. They specify the names of the input and output files. These lines open the two files for use.

The second parameter on the open function is the *mode* in which the file will be processed. The options are:

OPEN Parameter	Processing Mode
r	Read.
w	Write. If the file already exists, its contents are overwritten. If the file does not exist, it is created.
a	Append. If the file already exists, add new lines to the end of the file. If the file does not exist, create it.

The third parameter on open is optional. If specified, it supplies the name by which the stream can be referred to in subsequent file-oriented functions (such as linein, lineout, and close). This parameter works whether quoted as in the example, or just supplied as an unquoted symbol. Either 'in' or in will work. Consider this a *file handle*, or reference name, for the file.

The do-while loop copies the lines from the input file to the output file. These lines in the loop show the use of the ftell function to retrieve and print the current read and write file pointers:

```
say 'Input file position after read #' j || ': ' ftell('in')
say 'Output file position after write #' j || ': ' ftell('out')
```

ftell is useful to programs that explicitly manipulate the file pointers. It gives them a way to verify the current file positions. This could be useful, for example, for scripts that perform *direct* or *random* file I/O. It's also useful in scripts that read data from the same file more than once or in programs that update data within a file. The standard charout and lineout functions can also explicitly position a file pointer. The stream function allows you to open a file in advanced modes for special processing.

Finally, these lines close the two input files:

The script checks the return codes from the close operations just as it did from the open functions. This small step goes a great way to increasing program reliability. We have not included such error checking in the examples of this book out of concern for program length and clarity. But in industrial programming, the small effort required to check I/O return codes yields big dividends in program reliability.

We recommend checking return codes from *all* input/output operations, whether using C-like I/O or standard Rexx I/O functions.

Summary

This chapter summarizes some of the additional features offered by Rexx/imc beyond the TRL-2 standard. Several of these features are especially useful to Unix and Linux programmers, fitting the traditions and expectations of this programming community. Rexx/imc is a proven interpreter that runs on any Unix, Linux, or BSD operating system.

The specific areas we discussed were the strengths of Rexx/imc and why you might use this interpreter. Then, we described the typical installation process using common package managers, and also how to build the product from source code.

We described Rexx/imc functions for retrieving environmental information, higher mathematics, SAA-based access to external function libraries, and C-language style file I/O. Finally, we illustrated some of the extended features of Rexx/imc in two sample scripts. The first demonstrated how to retrieve environmental information, while the second showed how to perform C-like input/output.

Test Your Understanding

- **1.** Under what operating system families does Rexx/imc run? What are Rexx/imc's strengths? What Rexx language standards does it meet?
- **2.** What extra I/O functions does Rexx/imc add beyond standard Rexx? What is this new I/O model and how do you use its functions? When would you use the extra C-like Rexx/imc I/O functions versus standard Rexx I/O?
- **3.** How does Rexx/imc enhance the select instruction beyond its usual definition? How can this be useful?
- **4.** How do you register or load an external function for use in a Rexx/imc script? How do you drop that function? How can you check to see if an external function is available from the script?
- **5.** What values does Rexx/imc accept as TRUE in condition comparisons? How does this differ from traditional Rexx? Would a script that uses the standard truth value still run under Rexx/imc?

BRexx

Overview

BRexx is a free version of classic Rexx developed by Vasilis Vlachoudis, a nuclear scientist at CERN laboratory in Switzerland. Written as an ANSI C-language program, BRexx is notable for its high performance and small size. It also provides special built-in functions and external function libraries that offer many extra features.

BRexx was originally developed for DOS decades ago. Evolving ever since, it has been used on a very wide variety of operating systems including varieties of Linux, Unix, BSD, macOS, Windows, and DOS. The BRexx/370 project offers an open source alternative to IBM's Rexx for mainframe operating systems. And, BRexx runs on Android as well, providing a good example of how Rexx spans the gamut from cell phones to mainframes. (Chapter 25 provides extensive coverage and programming examples of BRexx on Android.)

BRexx's outstanding feature is its tiny footprint. The entire product, including full documentation and examples, totals only a few megabytes. That's small enough to install almost anywhere.

And BRexx runs fast, too. In tests versus other Rexx interpreters, it's always one of the fastest.

This chapter describes the strengths of BRexx and how to download and install it. Then we'll discuss some of its special features that extend beyond the Rexx standards. These include extra built-in functions, such as those for manipulating the stack, system information and control, higher mathematics, C-language style input/output, and MySQL and SQLite database access.

BRexx shines in supporting several I/O paradigms, including standard Rexx I/O, C-like I/O, and database I/O. We'll discuss when each is best used and the BRexx functions that support each I/O model.

We'll also discuss BRexx functions designed specifically for Windows CE. Windows CE is a legacy system: Microsoft has announced that license sales will end in 2028. So you may choose to skip this section unless you have a specific interest in Windows CE or Microsoft's related "Windows embedded" operating systems for handhelds and cell phones.

We'll walk through several example BRexx programs that highlight its unique features. These programs illustrate C-like I/O, SQLite database access, array I/O, and direct data access.

We conclude with an example program that demonstrates BRexx's special DOS functions. While long obsolete as a general purpose operating system, DOS lives on in embedded programming, device control programming, and as a gaming platform for some 7,000 free DOS games.

Advantages

As in previous chapters that examine specific Rexx interpreters, we need to know what BRexx features distinguish it from the alternatives. In this section, we briefly list and discuss some of the advantages to the BRexx interpreter. These are some of the key strengths of the product:

Performance — Since it is written as a C program, this interpreter is fast. It consistently beats many other Rexx interpreters in direct comparisons.
Runs Almost Anywhere Anywhere you can compile a standard C program, you can compile and run BRexx.
<i>Small footprint</i> — Distributed as a single compressed file, the entire installed product requires only a few megabytes of disk space.
<i>Proven support</i> — This product exhibits a consistent, dedicated history of product improvements, bug fixes and upgrades over many years.
Extra functions for common tasks — Bundled with the interpreter are about a dozen external function libraries for purposes like screen I/O, C-style file I/O, Unix and DOS functions and the like.
Special Windows CE features — BRexx is specially customized for Windows CE by the addition of some 20 extra functions and appropriate documentation. It runs natively under Windows CE and similar Microsoft operating systems for handhelds.
Commands and programs treated as functions — Scripts can run commands or programs coded as if they were functions as long as those routines use standard I/O.
Documentation with program examples — The product comes with HTML- based textual documentation and several dozen programs that illustrate its unique features.

BRexx is especially suitable where machine resources are limited. For example, the author worked with a charity that collected donated personal computers, configured them, and supplied them to needy individuals. We needed to be able to write simple scripts that would run on almost any PC, without having the luxury of assuming that the PC had a working Internet or LAN connection, bootable USB ports, or any minimum amount of internal memory. We quickly learned that BRexx is particularly well suited to such situations. No worries about available disk space or memory constraints. No configuration or compatibility issues. BRexx is very fast so the scripts ran quickly even on older machines.

BRexx fully meets the TRL-2 standard and is at language level 4.00. It also goes well beyond the Rexx standards in offering many additional built-in functions, over a half-dozen external function libraries, and other extended features described in the following sections.

Downloading and Installation

BRexx can be downloaded from several web sites. Probably best is its home page at GitHub web address https://github.com/vlachoudis/brexx. Or visit the BRexx project at SourceForge at https://sourceforge.net/projects/brexx/.

BRexx packaging has varied over the years for different platforms. Sometimes there are platform-specific downloads for Linux package installers, such as .rpm files for the RPM Package Manager, and .deb files for Debian-based package managers. There have also been the equivalent setup.exe install files for 32-bit Windows and Windows CE.

If any of these are available to you, just download the file, then double-click to run the package installer, and you're done.

Installing from Compiled Binaries

At other times, BRexx has offered compiled binaries for specific operating systems. These usually download in the form of compressed file downloads, files with extensions such as .zip, .tar.gz, or .tgz.

After downloading the file, you double-click on it to extract all the files from the archive. (It's possible that this only produces a .tar file, in which case, you need to double-click that .tar file to finally extract all the files.)

Once you've got the binaries and other BRexx files in place, you may need to set two environmental variables. As you would expect, one of them is your PATH variable. Make sure that the PATH on your system includes the location of the BRexx executable.

For example, if you install the BRexx executable rexx into the directory /usr/local/bin, you would want to see if that directory is in your PATH with this line command in Linux/Unix/BSD:

```
echo $PATH
```

If not, add it to the PATH with a command like this:

```
export PATH=$PATH:/usr/local/bin
```

The other environmental variable you may need to set is RXLIB. This tells BRexx the location of its *library file* (also called a *shared library* or *load library*). It may be easiest to locate the library file in the same directory as the BRexx executable, rexx:

```
export RXLIB=/usr/local/bin
```

For Linux, Unix, and BSD systems, remember that you can code the first line of any script to indicate the location of the BRexx executable. For example, if the BRexx rexx executable resides in /usr/local/bin, the first line of your Rexx program would be:

```
#!/usr/local/bin/rexx
```

By default, the file name extension for BRexx scripts is .r. So the name of the well-known Rexx benchmarking script would be: rexxcps.r

Installing from Source Code

Installing BRexx from source code is the third install option you might encounter. In this case, download the compressed file that will likely have the file name extension of .zip, .tar.gz, or .tgz.

Double-click to decompress that file and extract all its files from the archive. (If double-clicking produces a .tar file, double-click that file to finish the process.)

Now, you need to compile the C-language source code. Nearly every Linux, Unix, or BSD system includes a C compiler. If not, download one for free from the GNU project at https://gcc.gnu.org/. If you're on an Apple computer running macOS, you will probably need to download Xcode from Apple's App Store.

To compile and link BRexx, open a terminal, change the directory to where you extracted BRexx, and issue these three commands. You can issue all three using the root user id, or just the last command as root:

```
./configure
make
sudo make install
```

Now, just set the PATH and RXLIB variables as described previously.

If you receive the following error, you have downloaded a version of BRexx that requires that the MySQL database be installed as a prerequisite. In this case, download and install MySQL from your favorite software repository or the MySQL website at www.mysql.org. Then, rerun the above three commands.

```
configure: error: Couldn't find mysql config. Please verify that it is installed.
```

Installing BRexx/370

BRexx/370 is a port of BRexx to mainframe operating systems running on the Hercules emulator, an open source tool that enables you to run IBM mainframe OS's on other computers, such as personal computers.

You can download BRexx/370 from at least three different GitHub projects. One implements BRexx for CMS (VM/370). Rexx runs in CMS as memory-resident. Another project targets MVS (OS/VS 3.8). This has been enhanced with support for VSAM/KSDS, 3270 formatted screens, TCP/IP, NJE38, and other OS facilities. A third project called **MVS 3.8 TK** (for TurnKey) downloads both MVS and bundled BRexx/370. This last project is easily installed via a Docker container.

Please see Appendix Z for more on BRexx/370, including product description, the websites for downloading it, and install information.

Installing on Windows

At various times, BRexx has offered automated installation for 32-bit Windows and Windows CE via setup.exe files. The "Windows CE" section later in this chapter goes into more detail about installing BRexx under Windows CE. At the time of writing, if you want to run BRexx on 64-bit Windows, you would have to compile it from source code.

Extra Built-in Functions

BRexx includes many built-in functions beyond those included in standard Rexx. These supply a lot of the power behind the BRexx interpreter and take it well beyond the features and capabilities of standard Rexx. This section describes these extended functions and their uses.

Three stack functions control the creation and destruction of stacks for the external data queue. All operate in the manner expected, as per the discussion of how stacks work in Chapter 11:

Stack Function	Use
makebuf()	Creates a new system stack
desbuf()	Destroys all system stacks
dropbuf(n)	Destroys the top n stacks

BRexx was originally written for DOS-based personal computers. Given this heritage, it offers several low-level PC-oriented functions that no other Rexx interpreter includes. These can be very useful for PC control and diagnostic programs on older computers. Here is a brief list of these functions:

System Function	Use
load(file)	Loads a file of Rexx scripts to use as a library. This is the basic function by which scripts access external BRexx function libraries.
<pre>import(file dynamic library)</pre>	New in version 2.1, this function imports a shared library using dynamic linking with Rexx routines. For example, to access the MySQL API library under Linux, code: call import "librarysql.so" This function effectively supercedes the load function.
<pre>intr(number, reg-string)</pre>	Executes an x86 soft interrupt (works under DOS only).
storage(address,length,data)	Returns contents of the specified memory location, or returns the size of memory if no parms are encoded. Can also overwrite the contents of a storage location.
vardump(symbol,option)	Returns the tree of internal interpreter variables. Mainly useful for debugging purposes.

BRexx includes a full set of advanced mathematical functions. These are similar to those included in other Rexx interpreters and operate in the manner one would expect:

Math Function	Use
acos(number)	Arc-cosine
asin(number)	Arc-sine
atan(number)	Arc-tangent
cos(number)	Cosine
cosh(number)	Hyperbolic cosine
exp(number)	Exponentiation
log(number)	Natural log
log10(number)	Logarithm of base 10
pow10(number)	Power using base 10
sin(number)	Sine
sinh(number)	Hyperbolic sine
sqrt(number)	Square root
tan(number)	Tangent
tanh(number)	Hyperbolic tangent
pow(a,b)	Raise a to power b

Input/Output

BRexx supports the full set of ANSI-1996 input and output functions: charin, charout, chars, linein, lineout, lines, and stream. Standard Rexx scripts that run with any other Rexx interpreter will run under BRexx.

BRexx goes beyond standard Rexx I/O to give the developer alternatives. It offers a full set of C-language built-in functions for I/O. These allow programmers to explicitly open or close files, open files in specific modes by open and stream, flush file buffers, test for end of file through eof, read and write either characters or lines, and position the file pointers by seek.

This C-oriented I/O model offers a more full-featured alternative to traditional Rexx stream I/O. Some other Rexx interpreters offer such functions through stream function commands, and BRexx as well includes an extensive set of over a dozen stream function commands.

Here are the C-like I/O built-in functions:

Input/Output Function	Use
open(file,mode)	Opens a file for reading, writing, or appending in either binary or text modes; returns a file handle
close(file)	Explicitly closes a file
read(file,amount)	Reads data as characters, bytes, or lines
<pre>write(file,data,[newline])</pre>	Writes characters, bytes or lines of data
eof(file)	Tests for end of file
flush(file)	Explicitly flushes the file buffer
seek(file,offset,[option])	Explicitly positions the file pointer
<pre>stream(stream,[option],[command])</pre>	Supports ANSI stream options, plus permits issuing some 15 different file I/O commands

The C I/O model will be appreciated by those who require its powerful features or are familiar with the C++ or C languages.

BRexx also provides a set of functions that interface to the free database, MySQL. These are built-in functions, not an external library. The MySQL functions provide a third alternative for I/O, one based on the most popular open-sorce database. Here are these functions:

MySQL Function	Use
dbclose()	Terminates a database connection
<pre>dbconnect(host,[user], [password],database)</pre>	Establishes a database connection
dberror(["Alphanumeric"])	Returns the error number of the last error
dbescstr(string)	Escapes special characters for use in a string
<pre>dbfield[num name [,"N","T","K","L","M","U", "A","F"]])</pre>	Returns info on fields from the previous query
dbget(row,col name)	Returns the value of the specified data element
dbisnull(row,col name)	Tells if a data element is null
dbinfo("Rows" "Fields" "Insertid")	Returns info about the previous database operation
dbsql(sqlcmd)	Executes the string as a SQL statement

Some recent BRexx releases include built-in support for the SQLite database. This is not an external function library, but rather built-in support. These releases require installing SQLite in addition to BRexx.

To summarize, BRexx supports up to four alternative I/O methods. It always includes standard Rexx I/O and built-in support for C-like I/O. In addition, various releases support MySQL database I/O and/or SQLite database I/O. Each approach has its advantages. This chart contrasts them:

I/O Model	Advantages
Rexx I/O model	Simple, portable, standard, universal
C I/O model	More explicit control over I/O
MySQL & SQLite databases	Accesses the popular open source databases. Yields the benefits of full database I/O through two different products.

The External Function Libraries

BRexx comes complete with about a dozen external function libraries. To use the library functions, first load the library with the load function:

```
call load "ansi.r" /* loads the ANSI.R library functions for use */
```

Here is another example demonstrating how to encode the load function:

```
call load "files.r" /* loads File function library for use *,
```

Once loaded, *all* the functions in the library are accessible in the normal manner. The load function is the rough equivalent of the rxfuncadd function used in other Rexx implementations, except that load makes accessible the full set of functions residing in the library by a single statement.

In current releases of BRexx, the import function provides an alternative to load. This function imports a shared library using dynamic linking with Rexx routines. For example, to access the MySQL API library, code:

```
call import "librxmysql.so" /* access functions in the MySQL library *,
```

Here are some of the external function libraries and what they offer.

- ☐ ANSI screen I/O (for Unix and DOS) A set of about a dozen functions that manipulate the cursor and control the attributes of text displayed on the screen. This provides a standard, terminal-independent set of ANSI screen control routines.
- □ *ANSI screen I/O (for Windows and DOS)* The ANSI terminal emulation controls supplied as built-in functions for higher performance.

Console I/O (for DOS) — A dozen functions that control the I/O mode, manipulate the cursor and read keyboard input. These offer an alternative to ANSI Screen I/O modeled on the popular C language "console I/O' (or "conio") library.
Date functions (for Unix and DOS) — A dozen functions that return and manipulate dates.
DOS functions (for DOS) — Twenty functions that retrieve low-level information including segment, offset, and interrupt addresses, disk and directory information, machine name and more. These work with any form of DOS but may not be available under Windows (depending on your Windows version).
<i>EBCDIC functions (for Unix and DOS)</i> — Functions that convert ASCII to EBCDIC and vice versa. This is useful because IBM and compatible mainframes use EBCDIC character encoding, while all midrange and personal computers rely on ASCII. These functions prove very useful in data transfer between machines using the two different data encoding schemes.
<i>File functions (for Unix and DOS)</i> — A dozen file functions that read or write an entire file to/from a Rexx array, return file size and attributes, and so on.
HTML CGI-scripting functions — These support CGI scripting and manage cookies.

Windows CE

Brexx has been specially customized to support the Windows CE family of operating systems for handheld computers. It includes built-in functions for Windows CE handhelds and an automatic installation program. It runs natively under Windows CE (it does not require a DOS emulator).

BRexx for Windows CE is downloadable in compressed binary form for a variety of popular handheld processors, including MIPS, Strong ARM, and the Hitachi SH* series of 32-bit processors. The product includes an automatic installation program. To install BRexx on the handheld device:

- **1.** Download the *.zip file containing the binaries for your particular handheld and its operating system to your desktop or laptop PC running Windows.
- **2.** Decompress or unzip the downloaded file into an appropriate folder on your Windows PC.
- **3.** Ensure that the Windows PC and the handheld are connected and that Microsoft ActiveSync or a similar product is active and can transfer files between the two machines.
- **4.** Double-click on the file setup.exe.
- **5.** BRexx is automatically installed from the Windows PC to the handheld. When the installation is completed, the handheld will display a new desktop icon for BRexxCE.
- **6.** Select the BRexxCE icon on the handheld, and you are interacting with BRexx.

Let's briefly take a look at the BRexx Windows CE functions. While more functions may be added and the workings of some of the existing ones altered, this list gives an idea of what is offered.

	sole functions — These functions manage the <i>console</i> or display. They help you manage for operations for character-oriented input and output:
	clrscr() — Clears main window

	clreol() — Clears from the cursor position to the end of the line		
	wherex(), wherey() — Returns cursor position		
	gotoxy(x,y) — Moves cursor to indicated screen coordinates		
	getch() —Gets a character from the keyboard buffer		
	kbhit() — Tells if a character is waiting in the keyboard buffer		
	e system functions — These functions aid in using the file system. They support common file erations and directory navigation:		
	copyfile(sourcefile, destfile) — Copies a file		
	movefile(sourcefile, destfile) — $Moves$ a file		
	delfile(file) — Deletes a file		
	mkdir(directory) — Makes a directory		
	rmdir(directory) — Eliminates a directory		
	dir(filemask) — Returns the complete directory list		
<i>Windowing functions</i> — The windowing functions set the window title, display message boxes, and manage the clipboard:			
	windowtitle(title) — Sets the title of the window		
	msgbox(test, title, [option]) — Displays a message in a message box		
	$\verb clipboard([type cmd [,data]]) Gets, sets, lists or clears data in the clipboard \\$		
<i>Unicode functions</i> — The two unicode functions support two-way conversion between ASCII codes and unicodes:			
	a2u(ascii_string) — Returns the ASCII string as Unicode		
	u2a (unicode_string) — Returns the Unicode string as ASCII		

Issuing Operating System Commands

BRexx issues commands to the operating system using the stack for command input and/or output. This example captures the output of the dir (directory) command into the stack:

```
'dir (STACK'
```

Access the command's output by issuing pull instructions to read the stack's contents. Chapter 4 provided examples of how to write a do loop using the pull instruction to read lines from the stack. Use that code to read lines output to the stack from commands like the preceding one when writing BRexx scripts.

BRexx recognizes the keyword strings (STACK, (FIFO and (LIFO, coded in the manner shown above. These permit scripts to specify stack input/output and the ordering involved. Remember that FIFO

stands for "first-in, first-out," while LIFO specifies "last-in, first-out." These terms were defined and illustrated in the chapter on stack processing, Chapter 11. Please review that chapter if you need a refresher on how the stack works.

Here's a BRexx example of how to send data input into an operating system command by using the stack. This sample command sends input to the operating system's time command through the stack:

```
'STACK> time'
```

A BRexx feature that extends beyond the Rexx standards is that commands and programs can be invoked by coding them as if they were functions, so long as they use standard I/O. Here are examples:

```
say 'dir'()     /* displays a file list via the operating system DIR command */
say 'cd'()     /* displays the current working directory via the CD command */
directory = 'cd'()     /* capture results of the operating system's CD command */
```

Be sure to encode the parentheses so that BRexx recognizes the "function call." This technique can be used with any command-line program (not just operating system commands), as long as they use standard I/O. It is a convenient and powerful way to access outside services.

Windows users may see varied results when using the redirection techniques, depending on their version of Windows. This is because operating systems in the Windows family do not treat standard I/O and redirection consistently. This is *not* a shortcoming of BRexx, but rather an aspect of how Windows operating systems redirect I/O. Different Windows versions redirect I/O inconsistently.

BRexx recognizes several environments as the target for operating system commands: COMMAND, SYSTEM, DOS, and INT2E. INT2E is the fast (but undocumented) way to issue command.com commands via Interrupt 2E. This is a DOS-only feature.

Example — C-like I/O

Let's take a look at a few sample scripts that demonstrate the extended features of Brexx. BRexx supports both standard Rexx I/O functions and a C-language-inspired I/O model. This program is similar to the I/O sample program of Chapter 21 on Rexx/imc. It illustrates the C I/O model and its functions. The script simply copies one file to another. The source and target files are specified on the command line when running the program. Here is the script:

```
say 'File OPEN Error!'
/* perform the file copy
                                                                    */
line = read(in_hnd)
do while eof(in_hnd) = 0
  bytes_written = write(out_hnd, line, newline)
   line = read(in_hnd)
/* close the files and exit
                                                                    * /
rc_in = close(in_hnd)
                                     /* close input file
rc_out = close(out_hnd)
                                     /* close output file
                                                                    * /
if rc_in <> 0 | rc_out <> 0 then
                                     /* check for errors on close
   say 'File CLOSE Error!'
exit 0
```

In the script, these lines open the input and output files and check for errors:

The open function follows C-language protocol for the *mode*, or the manner in which the file will be used. These are the valid file mode flags that can be encoded:

open Function Mode	Use
r	Read
w	Write (overwrites any existing file)
a	Append (adds to the end of any existing file)
+	Read and write
t	Text mode
b	Binary mode

The Text and Binary modes are mutually exclusive. Use either one or the other on any open statement. The Text and Binary indicators are usually combined with one of the other flags. For example, you might open a file for Read in Text Mode, or for Write in Binary Mode. Later in this discussion sample scripts illustrate how this works.

The function returns a *file handle* that can be referred to in subsequent file operations. If the function returns –1, an error occurred during the open function.

The do-while group uses the read function to read the input file:

```
line = read(in hnd)
```

read returns either a specific number of characters or line(s). It can also operate *on an entire file* by using the F parameter. In fact, we could have copied the entire file with one line of code instead of the downline loop:

```
call write "new file", read("old file", "F") /* copy entire file ! */
```

The eof function returns 1 at the end of file, or 0 if the file is open and there are still lines to read. As with the read and write functions, it takes the file handle returned from the open function as a parameter:

```
do while eof(in hnd) = 0
```

The write function writes a line to the given file handle, optionally followed by a newline or line feed character(s). It returns the number of bytes written:

```
bytes written = write(out hnd, line, newline)
```

The read function does not provide the line-end character(s) to the script, so the script must add the new line to the output string through the write function newline parameter.

This code concludes the program. It closes both files based on their file handles, and checks for an error during closing. The return code of 0 means the files closed correctly:

The C-like I/O model is powerful. The ability to work with files in *binary mode* simply by coding the bootion on the open function is especially useful. This allows byte-by-byte file processing regardless of the manner in which the operating system separates lines or marks the end of file.

These file functions are all built-in. BRexx also provides an external function library for Unix and DOS that can, among other features, read or write an entire file to/from an array. Finally, BRexx offers an interface to the MySQL and/or SQLite open source databases as a set of built-in functions.

Example — SQLite Database

SQLite is a lightweight database interface that programmers use as a simple database for data storage. It's an open source product that's been available since the turn of the century. It's often used where programmers need an embedded database engine and don't want to cause their users to install an entire database management system. The website www.sqlite.org provides more information on the product as well as free downloads.

BRexx supplies a core set of SQLite functions. Though few in number, they are all you need:

Function:	Use:
SQL(sqlcmd)	Executes a SQL query specified as a sqlcmd string. Returns the number of rows
SQLBIND(col, "variable", value)	Binds a parameter indexed by a ? at column position col by a value
SQLCLOSE()	Closes the SQLite file connection
SQLGET([col[,V T]])	Either returns the number of columns, a column's value, or its datatype
SQLERROR()	Returns most recent error message
SQLITE()	Initializes
SQLOPEN(database)	Opens a database file
SQLRESET()	Resets the current statement
SQLSTEP()	Moves to the next row, returns "DONE" when at end

Here is an example SQLite program distributed with BRexx:

```
call import "sqlite.r"
call sqlite
                  /* initialize library */
call sqlopen "test.db"
call sql "create table square (id integer primary key, id2 integer, b blob)"
call sql "insert into square values (?,?,?)" /* prepare insert statement */
/* insert records */
do i=1 to 10
    call sqlreset
    call sqlbind 1,"i",i
    call sqlbind 2,"i",i**2
    call sqlbind 3,"b",copies("sql",i)
     call sqlstep /* perform the insertion */
end
/* read records */
say "Record=" sql("select * from square")
do until sqlstep() == "DONE"
    do i=1 to sqlget()
          call write ,sqlget(i)"|"
    end
say
end
call sqlclose
```

To discuss this coding sample, you can see that the first three lines will be common to most programs you write. They import (or load) the SQLite external function library, initialize SQLite for use, and open the database file you want to work with:

The next SQL statement creates a new table:

```
call sql "create table square (id integer primary key, id2 integer, b blob)"
```

The next statement sets up -- or *prepares* -- a SQL insert statement. Notice how the three values that will subsequently be placed into the insert statement are represented by question marks (?). These are *bind variables*, variables that will be assigned values by a subsequent sqlbind statement:

```
call sql "insert into square values (?,?,?)" /* prepare insert stmt */
```

Then, in the DO loop, you can see how the bind variables are substituted in by the sqlbind statements:

```
call sqlbind 1,"i",i
call sqlbind 2,"i",i**2
call sqlbind 3,"b",copies("sql",i)
```

The sqlstep function performs the actual insertion of the row into the database. Notice that a sqlreset statement starts every iteration through the DO loop to ensure that all SQL statements are reset prior to their reuse.

After the table has been populated, the DO loop terminates. Now the program initiates another DO loop, this time to read back all the information it has just inserted into the table.

This time the sql statement is used to read individual rows from the table. This demonstrates how you can use the sql function to issue just about any SQL statement you want. In this program, for example, it was used to execute CREATE TABLE, INSERT INTO, and SELECT sql statements. The flexibility of the sql function is what makes it possible to use BRexx for any kind of SQLite processing you may want.

As before, the sqlstep command actually executes the sql SELECT * FROM statement built previously.

And finally, sqlclose closes the database and terminates the program connection to it.

To summarize, the BRexx SQLite external function library provides a minimal subset of SQL commands. But using them, you can perform any database function you need to. The sql function is generalized to issue various database instructions.

In like manner, sqlstep is generalized for multiple uses. This program showed how it could be used to issue both SQL INSERTs and SELECTs.

Example - Array I/O

Another of the external function libraries included with BRexx offers an alternative set of functions to manage file I/O for Linux, Unix, BSD, and DOS systems. (This library is not for Windows.)

This little collection of routines resides in the library file named files.r . It's only a set of seven functions, yet it can manage most of your file I/O needs. Its distinguishing feature is that it enables you to read an entire file into a Rexx array in a single statement. Conversely, you can write an entire table out to a file with a single statement.

This single-statement "file read/write" feature is analogous to the mainframe Rexx EXECIO statement (covered in Appendix N).

Here are the functions in this library:

Function:	Use:
BASENAME(file)	Returns the filename without its the directory path
DIRNAME(file)	Strips the the non directory suffix from file name
FILESIZE(file)	Returns the file size in bytes
READWORD(file)	Reads one word from a file
READSTEM(file,stem[,pool]	Read the entire file into stem using as default pool 0. The stem.0
[,Upper])	contains the number of lines read.
WRITESTEM(file,stem[,pool]	Writes to the file from stem , stem.0 contains number of lines to write
EXIST(file), STATE(file)	Returns '1' if file exists, else '0'

Recall from Chapter 4 how arrays (or tables) work in Rexx. They often referred to as *compound variables* or *stem variables* because the symbols that represent them consist of two parts: a *stem* and a *tail* (or *suffix*).

For an array written in code as my_table.i.j

The name of the array or table is my_table		
The stem is my_table.	(it includes the period)	
The tail is i.j		
The two subscripts are i	and j	

With this background, let's take a look at a simple program that demonstrates the use of this function library and how to read and write an entire file in one statement:

```
/* This script demonstrates some BRexx file functions for Linux etc
call import "files.r"
                                         /* get external functions
parse arg filename
                                         /* read in a file name
                                                                       */
if \((exist(filename))) then
  say 'Filename' filename 'does not exist!'
else do
  say 'Filename without directory path is: ' basename(filename)
  say 'File size is:' filesize(filename)
  call readstem filename, "my array." /* read entire file to array */
  say 'Number of array elements is:' my array.0
  do i = 1 to my array.0
                                         /* display array contents
                                                                      */
   say 'array element: ' i my array.i
  end
  call writestem 'filecopy.dat', "my_array." /* copy file to new file */
                                             /* display copied file */
  'cat' 'filecopy.dat'
end
exit
```

The import function loads the external function library. parse reads a command line argument containing the name of the file to work with.

The program verifies that the file name it's given exists with the exist function, nested inside the IF statement test. Then, it uses the basename function to display the simple file name without its directory path, and the filesize function to report the size of the file in bytes.

With housekeeping done, the program reads the entire file into the Rexx array named my_array. Each input line from the file will occupy one slot in the target array. It's very important to code the readstem function using the stem name of the table (which includes the period).

The readstem function always places the number of elements read into the 0 th array variable. In other words, my_array.0 will contain the number of lines read.

The program then uses this information to process the array and displays its contents to the user.

Then the program invokes writestem to write the entire array to the specified file name. So it creates a duplicate file to the one the user supplied as a command line argument to the program. Be sure the 0^{th} element of the array indicates the number of elements it contains **before** the write.

A Linux cat command displays this duplicate file to the user to confirm its validity, and the program ends.

Example — Direct Data Access

The next sample script delves further into how to use the C-like I/O functions. This script shows their power in performing direct file access. The program goes to specific file locations to retrieve data elements, showing how the C I/O model can be used for direct or random file access.

It's important to distinguish between in file access methods between direct access to a specific record within a file, versus positioning a file pointer forward in a sequential-access file. In the latter case, you move a record pointer to a particular position within a file, then read that record. In many systems, that means you have effectively read through all intervening records in the sequential file (even if they are not passed to your program). And, you can't go backwards to a previous record.

A true direct or random access routine allows you to position the file's record pointer arbitrarily, forwards or backwards. It doesn't read intervening records while seeking the one you specify.

Another distinction is that with some direct access routines, you must supply the byte position where you want to read a record. Other systems perform that calculation for you. Instead you just supply the relative record number within the file.

This example script prompts the user to enter a Pool Pass Number, then displays that patron's record on the screen. This sample interaction with the Pool Read program shows that the second record (Pool Pass Number 2) is assigned to Ross Geller, and Pool Pass Number 4 is assigned to Joey Tribiani. Pool Pass Number 17 is not yet assigned, because that relative record does not exist in the file. Pool Pass Numbers correspond to direct access positions or *slots* within the random-access file:

This script illustrates direct or random access to the pool pass records:

```
/* POOLREAD
/* Reads random-access pool file records to display to the user.
in_hnd = open('poolfile','rb')
                                   /* open binary input file */
recsize = 30
                                   /* size of 1 file record */
                                   /* returns file size
filesize = seek(in_hnd,0,"EOF")
input_limit = filesize - recsize
                                    /* calculate last record */
say ' '
call charout , "Enter Pool Pass Number: " /* get the user's request */
pull pass_number .
do while pass_number <> 'EXIT'
  position = ((pass_number-1) * recsize) /* read record at POSITION */
  if position > input_limit
                                   /* POSITION > last record */
     then say 'That Pool Pass number is not assigned.'
    /* parse & display record */
    parse value in_record with first_name (sep) ,
              last_name (sep) phone_number
     say 'Pass Number:' pass_number
     say 'Person :' first_name last_name /* display the record */
     say 'Phone
                 : ' phone_number
  end
  call charout ,"Enter Pool Pass Number: " /* get user's request */
  pull pass_number .
call close in_hnd
exit 0
```

The script opens the file for read access (r) and in binary mode (b). Binary mode is appropriate because there are no line-termination characters within the file:

This code uses the seek function to return the size of the file. The EOF parameter forces the file pointer to the end of file. The calculation for input_limit is used to tell if the user has entered a Pool Pass Number that does not yet exist (that is larger than the file size indicates has been stored):

The script prompts the user to enter a Pool Pass Number. This code takes that pass_number and calculates the relative byte position where the record is located within the direct access file:

If the position is too big, the script knows that there is no such record and tells the user so:

If the Pool Pass Number is valid, the script uses the seek function to position the file position pointer to read the proper record. Then the script reads that 30-byte record:

The parse instruction parses the record into its components, separated by commas:

Now the script displays the Pool Pass information on the screen. Then it prompts the user to input another Pool Pass Number. When the user enters the string exit, the script terminates.

This script demonstrates how to use BRexx's C-like I/O functions to open a direct-access file and randomly retrieve records. It shows that advanced I/O functions can be used to implement different approaches to data storage and retrieval. In this case, we stored fixed-length records within a standard operating system file and retrieved specific records based on their relative record positions within the file.

Example — DOS Functions

A DOS program? Who cares about DOS? Well, while desktop computer users long ago moved from DOS to Windows, DOS continues to be a very widely used operating system. Many applications require a completely stable, well-known operating system with a very small footprint.

Examples include *embedded systems* and *device control programming*. The software on these systems must run error-free and without maintenance. If the software fails, the device is broken. DOS fits this need. It is so well known that even its quirks and bugs are documented. With many free versions available, DOS keeps prices down, important when programming consumer devices that sell in such large numbers that even a small fee becomes an important cost factor.

The biggest competition to free DOS versions for embedded systems and device control programming comes from "tiny" -- stripped down -- versions of Linux. Linux, too, is free, open source, and a rock solid embedded platform. Linux offers many more capabilities than DOS. Yet DOS fulfills a need standard Linux can not. DOS is a single-tasking, real-time operating system. Some use cases require that. And, of course, DOS and DOS emulation are still used for gaming, supporting the estimated 7,000 DOS games available for free download.

With its long-time support for DOS and its many special DOS functions, BRexx offers a Rexx implementation specifically extended and customized for this world. This simple script demonstrates a few of BRexx's DOS-specific functions. Here's what the script does:

- **1.** Retrieve system information about the PC on which the script runs.
- **2.** Read in a filename from the user and:
 - a. Display the file's size and attributes.
 - **b.** Read the entire file into an array *in one statement*.
 - **c.** Display the file's contents by writing out the array.
- **3.** Issue an operating system command by five different methods.

Here's the script output. (We have removed extraneous blank lines from the output for readability.)

```
======= PC Information ========
The machine name is : Not defined
The DOS version is : 6.20
System memory is : 201504
The current disk is : C
Freespace on drives : 112246784 211787776
Enter a filename: dos_info.txt
======= File Information ========
The filesize of the test file is: 48
The file attributes of test file: RHSVDA
Here is the contents of file: DOS INFO.TXT
this is line 1
this is line 2
this is line 3
====== DOS Command Tests ========
Method 1- DOS version is:
MS-DOS Version 6.20
Method 2- DOS version is:
MS-DOS Version 6.20
Method 3- DOS version is:
MS-DOS Version 6.20
Methods 4 and 5- DOS version is:
MS-DOS Version 6.20
MS-DOS Version 6.20
```

Here is the program:

```
/* DOS INFO
/* Illustrates some DOS-specific functions of BRexx.
call load "dos.r"
                           /* load the DOS function library
call load "files.r"
                          /* load the FILES function library
                                                             */
/* Display some PC system information
                                                             * /
say '======= PC Information ========
say 'The machine name is :' machinename()
say 'The DOS version is :' dosversion()
say 'System memory is :' storage()
say 'The current disk is :' getcurdisk()
say 'Freespace on drives :' drivespace()
call charout ,'Enter a filename: ' /* get a filename from user
                                                             * /
pull testfile .
if exist(testfile) then do
                                 /* if the input file exists... */
  /* display file size and its attributes as a string
  say '======= File Information ========
  say 'The filesize of the test file is:' filesize(testfile)
  file_attr = fileattr(testfile)
  say 'The file attributes of test file:' attr2str(file_attr)
  /* read the entire file in 1 statement into an array, display it */
  call readstem testfile, "filein." /* read entire file into array */
  say 'Here is the contents of file:' testfile
  do j = 1 to filein.0
                                 /* item 0 tells # in the array */
    say filein.j
  end
  end /* if... then do */
  say 'File does not exist:' testfile
say '======= DOS Command Tests ========
call charout ,'Method 1- DOS version is:' /* the traditional method \ ^*/
'ver'
version = 'ver'()
                                 /* capture "function" output
call charout ,('Method 2- DOS version is:' || version)
say 'Method 3- DOS version is:'
```

The first statements in this program give the program access to all the functions in the two external function libraries in the files named dos.r and files.r:

Loading the entire function library in one command is as convenient as one can possibly imagine.

Now the script issues a series of functions to retrieve and display information about the machine on which it runs:

```
say 'The machine name is :' machinename()
say 'The DOS version is :' dosversion()
say 'System memory is :' storage()
say 'The current disk is :' getcurdisk()
say 'Freespace on drives :' drivespace()
```

The storage function is particularly interesting. Without any operand, as in the preceding example, it displays the total amount of machine memory. It can also be coded to display the memory contents at a specific location. For example, this function displays 100 bytes of memory at machine location 500:

```
say storage(500,100)
```

The function can also be used to change that memory. This changes 5 bytes of memory starting at decimal location 500:

```
say storage(500,5,'aaaaa')
```

Next the script prompts for the user to enter a filename. This code tests whether the file exists:

Assuming that it does, the script uses BRexx functions to display its size and attributes. The fileattr function retrieves the file's attributes, and the attr2str function converts them to a displayable character string:

```
say 'The filesize of the test file is:' filesize(testfile)
file_attr = fileattr(testfile)
say 'The file attributes of test file:' attr2str(file_attr)
```

After displaying information about the file, the script reads the entire file into an array by this one statement:

```
call readstem testfile, "filein." /* read entire file into array */
```

The script displays the contents of the file by reading through the array:

The zeroth item in the array (filein.0) tells how many elements the readstem function placed into the array. There is also a writestem function that corresponds to the readstem function. It writes an entire array in a single statement. The element stem.0 tells writestem how many lines to write. Here we've used a traditional do loop to display the contents of the array the script read in to the screen, but we could also have encoded writestem to store the entire array to disk in a single statement.

Finally, the program demonstrates several different ways to issue operating system commands from within BRexx scripts. In this case, the program issues the DOS ver (version) command. First the script issues this operating system command in the traditional fashion:

```
'ver'
```

The interpreter does not recognize this command, and so it sends it to the external environment for execution. Of course, the default environment for command execution is the operating system.

Next, the script treats the OS command as if it were a function and captures and displays its output. This technique works only if the command uses standard I/O:

Now the script issues the command again and captures its output into the stack:

```
'ver (STACK' /* capture output via the Stack */
```

To retrieve the results, just pull or parse pull the stack items. The queued function tells how many lines are on the stack.

Finally, the script issues the ver command by the address instruction. First, it targets the SYSTEM environment for command execution, then the COMMAND environment:

```
address SYSTEM ver
address COMMAND ver
```

While this script demonstrates a small number of the BRexx external functions, it suggests how useful they can be for OS-specific programming. The functions are easy to use, and the product documentation clearly and succinctly describes how to code them.

Summary

This chapter summarizes some of the extended features of BRexx. This goal is to give you a feel for the features BRexx offers for Linux, Unix, BSD, macOS, Android, mainframes, Windows, DOS, and other platforms. This is only a brief summary of what is available. Interested readers should download the product and review its documentation for further information and product updates.

We demonstrated some of the extended features of BRexx in this chapter. These include additional built-in functions, such as those for manipulating the stack, retrieving system information, higher mathematics, C-language-style input/output, and MySQL and SQLite database access. We looked at how BRexx runs in native mode under Windows CE and offers Rexx as an alternative scripting language for handhelds that run that operating system. (Windows CE is a legacy system with license sales projected to end in 2028.) Of course, the Android operating system dominates on cell phones and other handheld devices, so chapter 25 covers BRexx on Android in some detail and provides programming examples.

We also discussed a few of the many function libraries that come with BRexx. These include libraries for C-like console I/O, ANSI screen I/O, date functions, ASCII-to-EBCDIC conversion, file management, and the like. While BRexx meets the TRL-2 standards, these additional functions give it the extra features beyond the standard that developers often find useful.

Finally, the sample scripts in this chapter demonstrated several BRexx features. These included C-like input/output, SQLite database access, array I/O, and direct data access. Direct or random file processing is a useful tool that forms the basis for many kinds of applications. The final script illustrated a few of BRexx's extensions for DOS programming. While the average desktop user considers DOS a "dead product," DOS continues a subterranean existence in embedded programming and legacy gaming.

Test Your Understanding

- **1.** Name three key advantages to BRexx. Why might you use it as opposed to other free Rexx interpreters?
- **2.** How do you position a file pointer within a BRexx script? How do you determine what the position of the current file pointer is? How do you position the file pointer to the beginning of a file? To the end of the file? How can you determine the size of a file?
- **3.** What is the purpose of the EBCDIC functions? Which function library would you use to perform "date arithmetic"?
- **4.** Name the functions for managing stack buffers. What does each do?
- **5.** What are three *I/O models* BRexx supports? When would you use each?
- **6.** What are the ways in which you can execute operating system commands from BRexx scripts? How do you send the command input and capture its output in each approach?

Reginald

Overview

Reginald Rexx was developed by Jeff Glatt of the United States. He took the Regina interpreter and heavily modified it to customize it, and added features especially oriented to the Windows operating system. The result is a well-documented product with features and tools that leverage Windows. Reginald supplies all the Windows-oriented "power tools" and functions Windows programmers expect. It's a free product that provides an alternative to proprietary Microsoft languages like Visual Basic and VBScript. As a Rexx interpreter, Reginald is standards-based and free of charge.

While Reginald has its users, its website recently disappeared. So the product appears to lack support at the time of writing. You might still want to take advantage of Reginald's large toolset, which can easily integrate with other Rexx interpreters.

But be aware: the product documentation refers to some now-deprecated Windows technologies (for example, ActiveX). We've retained such discussions in this chapter, in order to follow the Reginald documentation -- without update or correction. Such material may be outdated for current Windows programming.

This chapter provides an overview of the extended features and strengths of Reginald. The latter half of the chapter offers several sample scripts that illustrate some of these features. We'll start by listing and discussing some of the advantages of Reginald as a Rexx interpreter. After describing how to install the product, we discuss the extended functions of Reginald, how it supports Windows GUI programming, its advanced I/O features, and its other extended features and functions.

Advantages

As in previous chapters covering specific Rexx interpreters, we initiate the chapter by discussing a few of the reasons you might choose Reginald. Here are some of the benefits to Reginald:

Windows integration — Reginald completely integrates Rexx into Windows. This extends from the high level (a Windows Installer and GUI script launcher) to the low level (good Windows error handling and internal memory management). Reginald fully leverages Windows.

Windows functions and features — Reginald was written by a Windows developer because he saw a gap between portable Rexx interpreters and the Windows-specific features Windows developers require. Reginald eliminates this gap. For example, Reginald supports Windows GUI programming, interfaces to spreadsheets and Microsoft Access databases, runs Windows Dynamic Link Library files (DLLs), has built-in functions to support the Windows file system beyond the standard REXX functions, and fully accesses the Windows Registry. Reginald tools make typical Windows tasks easy, such as integrating sound into applications or developing sophisticated GUI interfaces.
<i>Tools</i> — Reginald provides a full set of developer tools. We discuss them in the material that follows.
Documentation — Reginald comes with comprehensive documentation. Whether seeking information about the interpreter, how-to's, or scripting examples, Reginald's "doc" provides the answer. Everything you need to learn about Reginald's many tools and Windows-specific functions comes right with the product.
Supports SAA API — Reginald supports the SAA API interface into Rexx from any compiled Windows language (not just from C language).
Meets standards — Reginald meets the Rexx TRL-2 standards and is at language level 4.00. It includes the new ANSI-1996 functions changestr and countstr functions, but not the ANSI-1996 LOSTDIGITS condition.

Download and Installation

Reginald, and its related tools, can be downloaded from www.RexxInfo.org or manmrk.net. They download as binary compressed files in either Zip (*.zip) or self-extracting (*.exe) formats for Windows. Simply download the files and double-click on them to initiate a typical Windows Installer interaction. Installation is similar to installing any other Windows products. The software can also be uninstalled via Control Panel's Add/Remove Programs option.

Reginald automatically creates a Windows file association between files with the extension *.rex and its Script Launcher. Double-clicking on a *.rex file runs Reginald through its Script Launcher. It is recommended that, at a minimum, you install the Reginald interpreter, the REXX Text Editor, REXX Dialog, and the online book *Learn REXX Programming in 56,479 Easy Steps*. Other tools and add-ons may be installed if you find a need for them.

Tools

Reginald offers a comprehensive set of tools for the Rexx programmer running Windows. Here are the major ones:

☐ Installer — A Windows installer for the Reginald package. Among other features it automatically associates Rexx files with the interpreter so that you can simply double-click on any Rexx script to run it.

Script Launcher — A GUI panel that helps you easily run Reginald scripts. It also allows you to assign input arguments to scripts and to create autorun CDROMs with Rexx scripts.
$Administration\ Tool-$ A single-panel Programmer's GUI that aids in the development and debugging of Rexx scripts. It allows you to autoload external function libraries and exit handlers for your scripts, and to easily set Rexx options, trace levels, and script paths. This tool centralizes administrative tasks and is a snap to learn.
Documentation — Explanatory documentation is a theme throughout Reginald. For example, there are Windows-style help systems for the Script Launcher, the Administrative Tool, and all the other components. There are extensive explanations of Reginald scripting and a full set of well-documented sample scripts. There are several online books containing tutorials on particular language features, and even a complete online book tutorial on Reginald. Everything you need to use Reginald comes with the product.
Rexx Text Editor (aka RexxED) — An editor specifically designed for writing and testing Rexx scripts. The GUI tool features color-coded syntax, a full help system, and other aids specifically for Rexx programmers. It also features a built-in graphical debugger to debug your script by setting breakpoints and running or stepping through the actual source lines in the text editor window. It allows you to add your own macros written in REXX (which may use add-ons such REXX Dialog). You can therefore add new features and interfaces to the editor.
<i>REXX Dialog</i> — Supports Windows GUI interfaces for Rexx scripts. Helps Rexx programmers develop complete, typical-looking Windows GUIs. The included online book fully documents the process and makes it easy to learn how to script Windows GUIs.
ODBC drivers — Open Database Connectivity (ODBC) drivers for Reginald access Microsoft Access Databases, dBASE files, or Excel files. These are files of type *.mdb, *.dbf, and *.xls, respectively. The ODBC drivers also enable local or remote access to a variety of database management systems. These include both open source databases such as MySQL and PostgreSQL, and commercial systems such as SQL Server, Oracle, and Db2.
<i>SQLite driver</i> — SQLite is a self-contained, embeddable, zero-configuration SQL database engine. It is useful as a local SQL-compliant database. Reginald interfaces to this open source product to provide a fast, embedded database engine.
Speech function library — An external function library that allows scripts to use a synthesized voice to pronounce or speak text. Uses the sound card or speaker to "play" the text. Audio output complements the usual screen output.
MIDI Rexx function library — An external library that allows scripts to read, write, play, and record MIDI files. MIDI files provide computerized control of musical equipment and are also used to play music on the PC. The included online book includes a full tutorial with sample scripts.
<i>MIDI I/O function library</i> — An external library that enables input/output to MIDI ports. This connects the PC to electronically accessible musical instruments and related devices.
$Rexx\ 2\ Exe$ — This utility converts a finished Reginald script into a self-running *.exe file. This allows distribution of Reginald programs without requiring distribution of the source script.
${\it Math\ functions}$ — This library contains transcendental mathematical functions (e.g., cosine, sine, and so on).
<i>RexxUtil</i> — Originally devised by IBM, these utilities manipulate stem variables and provide many other service functions. This is the Windows-based version of the IBM utility library that is widely distributed on many other platforms.

Regular expressions — This library contains functions that parse regular expressions. Regular expressions are a precise way to describe string patterns. They can be very powerful when applied to pattern and string logic.
$RxComm\ serial\ add-on\ -$ An external function library that lets scripts access and control serial ports (the PC's COM ports).
RxSock — TCP/IP sockets for communication between programs across the Internal or a local area network (LAN).
<i>The FUNCDEF feature</i> — Allows scripts to register and then directly call any function in <i>any</i> DLL, regardless of whether that DLL was written to be used from a Rexx script.
<i>Windows Internet API</i> — A function library for Internet communications that support HTTP, FTP, and Gopher operations. Scripts can download and upload Web pages and files and use the remote file control functions of the FTP protocol.
CGI interface — A function library for scripting the Common Gateway Interface, or CGI.
C Developer's Kit for Reginald — Includes library files for C programmers who use Rexx as a scripting language for their programs, or for those writing Rexx function libraries or SubCom or exit handlers in C. Includes C source examples and "makefiles" for Microsoft Visual C++ tailored for Visual Studio

Many of the above add-ons and tools support the Regina interpreter as well as Reginald. These include the REXX Dialog, Speech Function library, RexxUtil, Math Functions, Regular Expressions, RxComm Serial Add-on, RxSock, MIDI Rexx, MIDI I/O, and Rexx 2 Exe.

Windows GUI

One of the most important Windows-specific features of Reginald is the ability to create GUI dialogs for user interaction. Reginald calls this the *REXX Dialog*, or *RXDLG*, feature. REXX Dialog enables Reginald scripts to create and control the Windows graphical user interface.

The Reginald GUI functions are implemented as an external function library in a DLL file called rxdlg.dll. Once REXX Dialog is installed, Reginald can *autoload* these functions so that they are transparently available to any Reginald script you write. Reginald's *Administration Tool* makes this easy.

The REXX Dialog add-on will also work with the Regina interpreter, but it offers additional error-handling features under Reginald, as well as the ability to be autoloaded.

Alternatively, you can manually initialize (or "register") Rexx external functions for use from within any script that employs them. Do this by coding the function RxFuncAdd to register one external function for use. Better yet, code the special Reginald function RxdlgLoadFuncs to register all the REXX Dialog functions in the DLL with a single line of code. Call function RxdlgDropFuncs to drop all the functions once the script is done using them.

After making the dialog management functions available to the script, invoke function RxErr to establish how REXX Dialog will report any errors.

Next, set values for various *controls*, graphical objects that appear inside a window displayed to the user. Then invoke the RxCreate function to create and display the window that has those controls. Now the script issues RxMsg call(s) that allow the user to interact with the window's controls. With a RxMsg call, the script waits while the user manipulates the controls. RxMsg awakens the script when the user takes an action that needs to be handled by the script. The script then accesses information describing the user interaction and responds to it.

A script may repeatedly call RxMsg to interact with the user until the user takes an action to end the interaction. Or a script may invoke RxMsg only once, if the user interaction is a one-time event rather than an extended interaction through the window.

With these capabilities, scripts interact with users through one or more windows and through simple or extended interactions. Later in this chapter we present several scripts that show how to program basic GUI interfaces with REXX Dialog.

This table lists the major functions of REXX Dialog:

REXX Dialog Function	Use
RxCreate	Creates a new window with relevant controls
RxErr	Establishes the error-reporting protocol for REXX Dialog
RxMsg	Controls user interaction for a window
RxSay	Displays a pop-up message (a message box)
RxFile	Presents a file Dialog for the user to choose a filename
RxQuery	Returns the value or property attribute of an open window, group, or control
RxSet	Sets the value or property attribute of an open window, group, or control
RxInfo	Returns information about the REXX Dialog environment to a script
RxRunRamScript	Runs a series of Rexx instructions in memory (RAM)
RxRunScript	Runs a child REXX Dialog (RXDLG) script
RxDlgLoadFuncs	Makes all REXX Dialog functions available for a script
RxDlgDropFuncs	Terminates use of the REXX Dialog functions by a script
RxFuncAdd	Makes one specific external function available for use by a script
RxMakeShortcut	Creates a shortcut, an icon that links to a file

All dialog functions provide a return code. Check it for failure and to respond to any errors. Rexx conditions such as SYNTAX and HALT can also trap errors. The RXETT function customizes how Reginald handles errors via automatic message boxes and other techniques. Sample scripts later in this chapter show how RXETT displays a comprehensive set of error messages.

REXX Dialog supports the windowing concepts needed to create a typical GUI. Among them are controls, window moving and resizing, menus, accelerator keys, online help, timeouts, child dialog scripts, and window modal states.

REXX Dialog also supports a basic set of Windows controls. These include push, radio, and checkmark buttons; entry, list, and drop boxes; tree, spin, slider and text controls; a group box; and a menubar. REXX Dialog hosts Internet Explorer's rendering engine to allow your script to easily display any content that would appear upon a Web page, such as clickable Internet links, graphics, tables, scrolling banners, and so on.

In summary, Reginald's REXX Dialog package provides everything required to create professional Windows user interfaces.

GUI Development Aids

An independently developed Dialog Editor called *RxDlgIDE* works in conjunction with REXX Dialog. It allows you to use the mouse to graphically lay out a dialog with its controls, and then the tool generates a skeleton REXX script to create that dialog.

This Dialog Editor is itself written in Rexx and uses REXX Dialog. It can run as a RexxEd macro, so it appears under RexxEd's macro menu and can output its skeleton script directly to a RexxEd editor window for manual editing.

The full name of RxDlgIDE is the *REXX Dialog IDE* (or *interactive development environment*). It comes with a dialog resource editor that manages graphical components and integrates with RexxEd.

Input/output

Reginald supports the standard Rexx streaming I/O model and all the standard functions (charin, charout, chars, linein, lineout, lines, and stream). Reginald also offers many additional built-in functions and features pertaining to the Windows file system. These include opening a file in shared mode (i.e., allowing more than one program to access the one file simultaneously), creating and deleting directories: deleting, renaming, moving files; obtaining a directory listing, resolving paths, reading and writing numeric quantities from binary files; listing the drives and media on a system; and so on. Wildcard patterns can be used as arguments to many of these functions so that entire groups of files are affected in one function call (for example, to manipulate an entire directory of files with a single function call).

Here are some of the extra I/O functions in Reginald:

Input/Output Function	Use
Dir	Creates or deletes a directory or directory tree
Directory	Returns the current directory or changes it
ChDir	Changes the current directory
DeleteFile	Deletes one or more files
MoveFile	Moves (or renames) one or more files
CopyFile	Copies one or more files
State	Existence-tests a file or stream
MatchName	Finds the first or next file in a directory that matches the given pattern; also returns file information such as size, attribute bits, last write date and time, and so on
SearchPath	Finds a file or directory or gets the value of an environ- mental variable or returns the location of special folders such as the Windows directory
DriveMap	Lists all drives having specified attributes, such as all CD-ROM drives
DriveInfo	Retrieves drive information such as free space
Path	Gets a full path name from a filename, queries the current directory, and/or splits a path name into separate elements
Qualify	Returns a full path name from a filename
FileSpec	Returns part of a path name
EditName	Transforms a filename into a new name according to a template possibly containing wildcards
ValueIn	Reads binary values in as numeric values
ValueOut	Writes one or more numeric values as binary values
LoadText	Reads the lines of a text file into a stem variable, or saves a stem variable's lines to a text file

For those accustomed to Windows programming, the power of the Reginald's I/O functions should readily be apparent. They provide the functionality necessary to create Windows applications. They put Rexx scripting on competitive footing with any other approach to Windows programming.

Another alternative is to use Reginald's *Open Database Connectivity*, or *ODBC*, *drivers* to write scripts that connect to data sources such as Microsoft Access, Microsoft Excel, and Borland's dBASE database. ODBC also connects to commercial databases such as Oracle, DB2, and SQLServer, and to open-source databases like MySQL and PostgreSQL.

A third option is to use the *SQLite interface*. SQLite is an embedded, open-source, SQL desktop database. SQLite is a good tool for scripts that require data management but do not need a large, multiuser database. See www.sqlite.org for further information and downloads of SQLite.

Documentation and Tutorials

Learn REXX Programming in 56,479 Easy Steps

Reginald features comprehensive documentation. Each tool has a help system that you can use to learn how to code using the tool. Reginald offers a number of complete tutorials that are all freely downloadable from the Web site:

	Programming with REXX Dialog
	Using Reginald with a Common Gateway Interface (CGI)
	Using Reginald to Access the Internet
	Using Mailslots with Reginald
book do access.	ckage includes <i>Learn REXX Programming in 56,479 Easy Steps</i> , an easy-to-read tutorial. This online ownloads with Reginald, self-installs, and places an icon on the Windows desktop for quick Through it, Reginald's developer shares his comprehensive knowledge of Rexx programming indows environment.
	d includes well-commented sample scripts for every one of its additional features. The kinds of techniques you can learn from them include how to:
	Create GUI windows and user dialogs with REXX Dialog
	Download a Web page or file from the Internet
	Send email, optionally with attachments
	Put text onto the Windows clipboard
	Create a Zip archive from several files
	Use the SQLite DLL to read rom and write to local SQL databases
	Manipulate the mouse pointer on the screen
	Play video and audio clips
	Place an icon in the Windows System Tray
	Play a MIDI file
	Recursively search a directory
	Read file attributes and information
	Read Windows Registry values
	Launch and run an independent "child" script

Reginald provides the hooks into the Windows operating system that other Rexx interpreters lack. If you need Windows-specific programming capabilities, Reginald provides them.

Other Features and Functions

This section describes other features or functions that represent Reginald extensions to standard Rexx. First, we'll take a look at how scripts issue Windows operating system commands. This is achieved in the same manner as with any other Rexx interpreter, but the topic is worthy of discussion from the standpoint of the Windows-specific programs one can launch. We'll also discuss operands on the options instruction, the Windows Registry, exception conditions, how to invoke Windows DLLs, and extended functions and instructions. Following this quick tour, subsequent sections introduce sample Reginald scripts that illustrate device, file, and drive management; GUI programming; speech synthesis; and how to update the Windows Registry.

Operating system commands

With Reginald, scripts can issue operating system commands to the CMD environment. This includes all Windows shell and command-line commands. Unless you frequently program under Windows, the range and power of Windows commands may not at first be evident. Keep in mind that you can invoke *any* Windows application. These bring broad power to your scripts. The examples that follow hint at the Windows-specific applications Rexx scripts can invoke by a single statement.

For example, this code sends a command to the CMD environment that invokes Microsoft Word:

```
address 'CMD' /* send OS commands to CMD environment */
'winword.exe file_to_edit.doc' /* invoke Microsoft Word editor */
```

Windows file associations are active. This makes it easy to start various Windows applications. For example, to run a Windows Media Player on a *.mpg file, you could code:

```
'c:\videoplayer\my_clip.mpg'
```

Similarly, you can run an audio clip by issuing a command string like this from the Rexx script:

```
'c:\audioclips\my_audio_clip.wav'
```

A single statement brings up and displays a Web page:

```
'webpage.html'
```

You can also start up Notepad by issuing a single statement. Start Notepad with an empty panel, or place the user into editing a specific file by naming it on the statement, like this:

```
'c:\windows\notepad.exe file_to_edit.txt'
```

Scripts gain complete power over Windows features when a knowledgeable Windows programmer integrates commands into his or her scripts. Here we've shown how to access Windows applications

such as Microsoft Word, the Windows Media Player, the Edge browser, and Notepad. The same principles (and easy access) apply to any other Windows applications you want your Rexx scripts to start, manage, and control.

It is important to note that some obsolete Windows operating systems always give return codes of 0, regardless of whether the OS command succeeds or not. Error conditions FAILURE and ERROR are never raised. This is not a flaw in Reginald but rather an aspect of the Windows operating system that the interpreter does not control. This behavior has long since been corrected in current Windows versions but we mention it for completeness.

Scripts may need to verify commands by some means other than just checking command return codes. Chapter 14 demonstrates some techniques to use to accomplish this.

You can run a series of programs or files from one directory by using Reginald's IterateExe function. This function launches an external program a number of times. Employ a filename pattern to select which files in a directory should run.

Reginald's POpen function is an alternative way to issue shell commands. Command output goes into the array specified on the POpen function, and variable position 0 (e.g., array.0) contains a count of how many lines were output into the array. Process the array to process the lines output by the command.

This sample code issues the operating system dir or directory command. The POpen function directs output from this command to the dir_list array (which must be specified in quotes). If the command return code were 0, the script would display the resulting directory listing:

The extra I/O functions in Reginald perform many common OS tasks. Use them to move, copy, and delete files, get disk and OS information, and the like. Reginald reduces the number of OS commands scripts need to issue and provides better control over them. Built-in functions are also faster than sending commands to the operating system or using the POpen function.

Options

Reginald supports about two dozen Windows-oriented options for the Rexx options instruction. For example, the LABELCHECK option causes a SYNTAX condition to be raised if the same label name is used more than once in a script. This can help detect inadvertent errors due to cutting and pasting source code.

Another example is MSGBOX. Turned on by default, this option tells Reginald to display error messages in a Windows message box, rather than a console or command-line window. Options like these enable scripts to control Reginald's behavior in the Windows environment.

Windows Registry

Reginald scripts can query, read, write, create, and delete Windows registry keys and values. The Value function provides this access. By default, registry operations apply to the Current User directory, but they can also be applied to any other directory. Scripts read, write, create, or delete Registry files, and create or delete Registry directories. Later in this chapter, we present a sample script that retrieves and updates Registry information.

GUI trace panel

Reginald supports the standard Rexx trace facility, and adds a GUI interface. Its *Debugger Window* supports all the normal Rexx trace features. It displays two panels. The left panel shows trace interpretation, while the right one shows which lines in the script are running. The Debugger Window buttons for Run, Step, and Redo make it easy to step through scripts.

Error conditions

Reginald's Raise instruction allows scripts to manually raise error conditions. Reginald's USER condition allows scripts to define their own error conditions. This brings to Rexx a capability that many other programming languages support—the ability to define and raise your own exceptions.

This sample code enables a new error condition and then raises it:

```
signal on user 1 name my_error_routine
   /* ... later in the program ... */
raise user 1 description "Raised User 1 Error Condition!"
   /* ... later in the program ... */
my_error_routine:
   /* ... code to handle the user-defined exception goes here ... */
say 'USER' condition('C') 'reports:' condition('D') /* write error msg */
```

The error condition is called USER, and its error number is 1. Reginald supports up to 50 different USER conditions, numbered 1 through 50. Use the condition function to retrieve information about the error:

- □ condition('D') Retrieves the error message
- \square condition('C') Retrieves the user number
- □ condition('M') Displays a message box with the error message

Windows DLLs

Windows external function libraries are typically implemented as *DLLs*. These are like the *shared libraries* that provide external function libraries under Linux, Unix, or BSD operating systems.

For DLLs that were specifically written to be used with Rexx, register and load them through the SAA-compliant functions RxFuncAdd and RxFuncQuery. Or use Reginald's Administration Tool to autoload the external function library.

Reginald also allows script writers to access any DLL function from their Rexx scripts, even if those DLLs were not written with Rexx access in mind. This key feature extends to Reginald developers the full range of Windows functionality. Register DLLs that were not specifically designed to be used with Rexx through the FuncDef function. This requires a bit more information on the call but gives access to any Windows DLL.

Sorting

Reginald's Sort statement sorts items within an array. The format is:

```
sort stemname. [template]
```

This statement sorts all items within the array stemname. The optional template is similar to the template used on a parse instruction. It controls matching string patterns, positional effects, and placeholders. The template allows for sophisticated sorts: by offset and length, on multiple values or criteria, in descending order, with or without case-sensitivity, and utilizing search strings.

Multiple stacks

Reginald scripts can have multiple stacks, of which one is active at any one time. The RxQueue function creates and deletes stacks. This function is also used to specify which stack is currently used. Reginald's Makebuf, Dropbuf, and Desbuf functions create, drop, and destroy all buffers within a stack. The Queued function returns the number of items in the current data stack. The BufType function returns information about the current stack for debugging purposes. One benefit to buffers is that you can easily delete all items placed on them by a single function call to Dropbuf.

Parameter passing

Reginald includes the Use Arg function to provide more sophisticated forms of parameter-passing between routines. This function makes it easier to pass multiple values between internal routines. It is especially useful in returning large amounts of data to a caller.

do over loop

Reginald includes the do over loop to allow enumerating all the compound variables that use a given stem. This is useful in processing all the variables that use a given stem name (even if you do not know how many there are or what tail names they use).

Here's an example. This code displays all the variable names used in the array named array.

```
do j over array.
say 'array.' || j
end
```

If you initialize the array contents like this:

```
array.1 = 'a'
array.2 = 'b'
array.5 = 'c'
array.9 = 'd'
```

Then the code outputs the array element names in use:

```
array.1
array.2
array.5
array.9
```

This helps you keep track of which array elements are used, especially when you're working with a *sparse array* (an array in which only certain slots or positions are used). do over does not guarantee any particular order in enumerating the tails.

do over is useful in processing all elements in an array with a simple loop. This example sums all the numeric values in an array:

Here's another example that adds 5 to every element in an array:

```
do j over array.
   array.j = array.j + 5
end
```

do over is very convenient for quick array processing. While syntax may differ, the do over concept is implemented in several other Rexx interpreters including roo!, Open Object Rexx, and NetRrexx.

Array indexing

Reginald allows use of brackets to specify a compound variable as if it were a single tail name to be substituted. For example, execute these two statements in sequence:

```
MyVar.i = 5
MyStem.[MyVar.i] = 'hi'
```

Reginald treats MyVar.i (in MyStem. [MyVar.i]) as a single variable name whose value will be substituted. Therefore, Reginald substitutes the value 5, and the variable name becomes MyStem.5 after substitution.

Improved interpret instruction

Reginald's interpret instruction allows you to signal to some label outside of its string parameter. Reginald also allows a return or exit instruction within the string. A return aborts the execution of the interpret string and resumes at the instruction after the interpret statement. An exit aborts the script.

Other functions

Reginald includes many built-in functions beyond the ANSI standards. In addition to the extra I/O functions mentioned previously, there are many other functions to retrieve system information, access external libraries, perform bit manipulation, and perform other activities. Let's briefly take a look at these functions and what they have to offer.

	System information functions — This group of functions are based on those often seen in Unix systems. They return information about environmental variables, the process identifier (PID), the current user identifier (UID), and the operating system and CPU. The unixerror function is useful for debugging. It returns the textual error message for a specified error number. Here are the system information functions:		
		getenv—Returns the value of an environmental variable	
		getpid—Returns the process ID (PID) of the process that launched the script	
		uname — Returns OS and CPU information	
		unixerror—Returns the error message for an operating-system specific error number	
		userid—Returns current username	
	rnal access functions — These functions permit access to external function libraries. Four of functions (rxfuncadd, rxfuncdrop, rxfuncquery, and rxfuncerrmsg) support the SAA face to external function libraries. These allow Reginald scripts to access any of the opence interfaces or tools described in Chapters 15 through 18 in the manner illustrated in those sters. funcdef is a Reginald-specific function. It makes an external function library avail-to Reginald scripts even if that library is a DLL that was created without any knowledge or rence to Rexx. It makes any Windows DLL available to Rexx scripts.		
		funcdef — Makes an external function in any DLL available to a script	
		querymacro — Test if a Rexx macro is already loaded	
		rxfuncadd—Make a Rexx-compatible external function available to a script	
		rxfuncdrop — Drop availability of an external function	
		rxfuncquery — Test if an external function is available for script use	
		${\tt rxfuncerrmsg-Return\ the\ most\ recent\ error\ message\ from\ rxfuncadd\ or\ funcdef}$ calls	
		<i>functions</i> — This group of functions is similar to those available in many other Rexx interers. They manipulate the external data queue, or stack, as described in Chapter 11:	
		buftype—Prints debugging info about the stack	
		desbuf — Deletes stack contents	

	ш	dropbuf — Deletes one or more butters
		makebuf — Creates a buffer
		queued—Returns number of lines in the current stack
		rxqueue—Creates or deletes stacks
Miscellaneous functions — Finally, Reginald offers a wide selection of miscellaneous func steminsert and stemdelete are of particular interest. These operate on any entire are stem variable) and serve to maintain that table as an ordered list during maintenance of		
		beep — Makes a sound or can play a WAVE file
		bit — Performs bit operations on a value
		convertdata—Converts binary datatype to Rexx variables, or vice versa
		expand — Replaces tab characters with spaces in a string, or vice versa
		$\verb iterateexe - Runs non-Rexx programs multiple times, as selected by file matching criteria$
		justify—Formats words in a string
		sleep—Suspends script execution for a specified number of seconds or milliseconds
		steminsert — Inserts elements into an ordered stem
		stemdelete — Deletes various elements of an ordered stem
		random — Returns a random number within a specified range

Leveraging Reginald

Before we discuss some sample Reginald scripts, let's ensure that you are familiar with and know how to leverage Reginald's development toolset. These GUI tools make scripting faster and easier. Here are a few key tools:

- □ Script Launcher This GUI panel launches Rexx scripts. It presents a dialog panel that looks like the standard Windows file-selection panel. Pass arguments to scripts through the Launcher, and interact with scripts that issue say and pull instructions through the Launcher's console window.
- Administration Tool This tool administers the scripting environment. Its GUI panel makes it easy to set options and trace levels, set paths so that scripts can locate unqualified filenames, and set values like numeric digits, fuzz, and form. It autoloads external function libraries, so the code that makes those libraries accessible does not have to appear in your scripts. It also autoloads exit handlers, functions written in other languages that modify Reginald's behavior. Using an exit handler, for example, you could change the way the say instruction works so that it pops up a message box instead of writing a line to the console.
- ☐ Rexx Text Editor (aka RexxED) This editor is designed for writing and testing Rexx scripts. Its GUI features color-coded syntax, a full help system, a built-in macro language, and other features designed for Rexx scripting.

□ RxDlgIDE — This independently developed dialog editor works in conjunction with REXX Dialog. It allows you to use the mouse to graphically lay out a dialog with its controls, and then the tool generates a skeleton REXX script to create that dialog. It can run as a RexxEd macro, so it appears under RexxEd's macro menu and can output its skeleton script directly to a RexxEd editor window for manual editing.

Sample Scripts — File, Directory, and Drive Management

Let's start with a simple script that uses some of Reginald's extended built-in functions to manage files and disks. These functions search through and manage files, manipulate filenames, and control folders and disks.

This program retrieves and displays information about the computer's disk drives, then lists specific information about the C: drive. Here's the script output:

```
List of disk drives : C:\ F:\ G:\
List of CDROM drives : D:\ E:\
List of removable drives: A:\
List of RAM drives :
List of Network drives :

Information about your C: drive...

Drive Type : FIXED

Serial Number : 548597677

Volume Label :
Size : 2785591296

Bytes Free : 527294464

Filesystem : NTFS

Filename length: 255

Drive Flags : 0000000000000111100000000111111111
```

Here's the script itself:

This script relies on two built-in functions to accomplish its work: DriveMap to get information about disk drives and DriveInfo to get details about a specific drive.

The first block of code in the sample script issues the <code>DriveMap</code> function to retrieve information about the PC's drives. The script omits the first parameter in calling <code>DriveMap</code>, which specifies which drive to start the query with. Leaving this out prompts <code>DriveMap</code> to return a list of all drives matching the criteria. The second parameter is a keyword that specifies the kind of drives we're querying for. The example uses all possible keywords: <code>FIXED</code>, <code>CDROM</code>, <code>REMOVABLE</code>, <code>RAM</code>, and <code>NETWORK</code>:

```
say 'List of disk drives : ' DriveMap(,'FIXED')
say 'List of CDROM drives : ' DriveMap(,'CDROM')
say 'List of removable drives: ' DriveMap(,'REMOVABLE')
say 'List of RAM drives : ' DriveMap(,'RAM')
say 'List of Network drives : ' DriveMap(,'NETWORK')
```

The second code block makes a single call to <code>DriveInfo</code>. This function returns a several data items about one particular drive. This encoding omits the drive name, so it defaults to the C: drive. The quoted name <code>drive_info</code> is the array or stem variable that <code>DriveInfo</code> populates:

```
feedback = DriveInfo('drive_info')
```

The script displays the information returned in the array if this call succeeds and its return code was 0:

```
say 'Information about your C: drive...'
say 'Drive Type :' drive_info.4
say 'Serial Number :' drive_info.2
say 'Volume Label :' drive_info.3
say 'Size :' drive_info.1
say 'Bytes Free :' drive_info.0
say 'Filesystem :' drive_info.5
say 'Filename length:' drive_info.6
say 'Drive Flags :' drive_info.7
```

Example — display file information

The next sample script retrieves and displays information about a file. The program reads a filename from the user, opens that file, and displays basic information about the file: its full name, size, date of last modification, and attributes. Then the program reads and displays the several lines that make up the file

Here's sample output for this script:

In this example, the user enters the filename of file_info_input.txt , and the script lists some basic information about the file and displays the four lines that make up that file.

Here is the script:

```
/* FILE INFO
/*
                                                       * /
/* Lists information about a file and displays its contents.
/* get the file name from the user, verify the file exists
say 'Enter file name:'; pull filename
say
if state(filename) then do
  say 'File does not exist:' filename
  say 'Press <ENTER> to end this program'; pull .
  return 1
end
/* retrieve and display information about the file
feedback = MatchName(,'FileInfo',filename,,'NFSDA')
if feedback = '' then do
```

```
say 'File Name : 'FileInfo
  say 'File Size :' FileInfo.0
  say 'Last Modified:' FileInfo.1
  say 'Attributes : FileInfo.2
  say
  end
else
  say 'Error on retrieving file info about:' filename
/* read and display all the file's lines by the LOADTEXT function */
if LoadText('in_lines.', filename) then do
  say 'The file has' in_lines.0 'lines. Here they are:'
  call LoadText('in_lines.',,'S')
end
say
say 'Press <ENTER> to continue...'; pull .
exit 0
```

The script prompts the user to enter a filename. After he or she does so, the script ensures that the file exists with this code:

```
if state(filename) then do
    say 'File does not exist:' filename
    say 'Press <ENTER> to end this program'; pull .
    return 1
end
```

The state built-in function returns 1 if the file does not exist and 0 if it does. The script simply displays an error message and terminates if the file does not exist.

Next, the script uses the MatchName built-in function to retrieve information about the file. MatchName is quite flexible. It can test for the existence of a file or directory, based on either attributes or a wildcard file reference. It can also return information about the file, which is its use in the script. This shows one possible use:

```
feedback = MatchName(,'FileInfo',filename,,'NFSDA')
```

The variable name, FileInfo, represents a stem or array that will be populated with the results of the MatchName call. filename is simply the input filename (as entered by the user), while the string NFSDA requests the information the script requires:

- □ N—Returns the name of the matching item
- ☐ F—Returns the fully qualified name of the matching item
- ☐ S—Returns the file size
- □ D—Returns the date of last modification
- ☐ A—Returns the attribute string

So the string NFSDA tells MatchName to return the unqualified filename (NF), the file size (S), the date of last modification (D), and the file attribute string (A).

MatchName returns the null string if it succeeds. In this case, the script displays the file information:

```
if feedback = '' then do
   say 'File Name :' FileInfo
   say 'File Size :' FileInfo.0
   say 'Last Modified:' FileInfo.1
   say 'Attributes :' FileInfo.2
   say
   end
else
   say 'Error on retrieving file info about:' filename
```

MatchName can do a lot more than shown here. You can specify file attributes as part of the file search mask. You can even specify wildcard filenames. This is useful for listing (and processing) all the files in a folder that match specified criteria. An upcoming example demonstrates this.

Finally, the script reads and displays the lines of the file. It reads the entire file into an array (a stem variable) in one statement by the LoadText function. It displays the entire file to the screen by a single call to LoadText as well. Here is the code:

```
if LoadText('in_lines.', filename) then do
    say 'The file has' in_lines.0 'lines. Here they are:'
    call LoadText('in_lines.',,'S')
end
```

The first parameter to the LoadText function is the stem variable name. It must end with the period that denotes an array name. The second parameter is the file to read or write. In the first call, this is filename, the file to read. In the second invocation, it is not coded, which means to use the default device. In that second call, the final parameter ('S') tells LoadText to save or write the data, rather than read it. Since the call specifies the default device, this displays the lines in the array on the user's screen.

This line shows that LoadText places the number of lines it reads into the 0th element of the array:

```
say 'The file has' in_lines.0 'lines. Here they are:'
```

The ability to read or write an entire file in a single statement is very convenient. It demonstrates the kind of power that Reginald functions add to standard Rexx.

Sample Scripts — GUIs

One of Reginald's big advantages is its support for Windows GUI development. The *REXX Dialog* external function library supports this through its dozen or so functions. REXX Dialog supports all kinds of Windows widgets including push, radio, and checkmark buttons; entry, list, text, and drop-down boxes; trees, spin counters, and sliders; groups, menus, and HTML pages. We show only a few very elemental examples here to demonstrate the basics of how to work with REXX Dialog.

This first script displays a text entry box to the user. The user enters some text into this box, as shown in Figure 23-1. Then the script reads and echoes this text to the user in a message box, as shown in Figure 23-2.



Figure 23-1



Figure 23-2

Here is the script:

```
/* DISPLAY INPUT
/* Illustrates the basics of GUI interaction.
/* Displays a text ENTRY box, writes back the user's input by
/* displaying it in a MESSAGE box.
/* trap errors for HALT/SYNTAX/ERROR, ask for ERROR raising
signal on halt
signal on syntax
signal on error
call RxErr 'ERROR DISPLAY' /* displays error messages
/* set values for the Text Entry box window
                                                        * /
Rx = ''
                          /* "RX" will be our Window ID.
RxType.1 = 'MENU'
                          /* group type is MENU for a menu */
RxFlags.1 = ''
RxLabel.1 = 'MENU'
RxType.2 = 'ENTRY'
                         /* establish the ENTRY box
RxFlags.2 = 'REPORT'
                          /* through which the user will
RxLabel.2 = 'Enter text: | '
                        /* enter some text
RxPos.2 = '-1 5 5 150'
```

```
RxVal.2 = 'text'
/* now create the window (NOCLOSE keeps this window open)
call RxCreate 'RX', 2, 'Main Window', 'NOCLOSE'
do forever
   call RxMsg
                             /* invokes user interaction
                                                               * /
   if RxID == '' then signal halt /* exit if users clicks CLOSE*/
   /* display the text the user enters in the ENTRY text box */
   if RxID == '2' then
     button = RxSay(text.1,'OK','You entered...')
end
                             /* handle errors here.
svntax:
                             /* RxErr with DISPLAY option */
halt:
error:
                             /* displays a nice error msg box */
   call RxMsg, 'END'
                            /* close ENTRY box window, exit */
   exit
```

The script issues several REXX Dialog functions, but it does not contain any code to access those external functions! Normally, you'd expect to see code like this to load the external function library:

```
feedback = RxFuncAdd('RxDlgLoadFuncs', 'RXDLG', 'RxDlgLoadFuncs')
if feedback <> 0 then say 'ERROR- Cannot load RxDlgLoadFuncs function!'

feedback = RxDlgLoadFuncs()
if feedback <> 0 then say 'ERROR- Cannot load Rexx Dialog library!'
```

Actually, the script *could* include this code to register and load the REXX Dialog external function library. But we've chosen to use the *Administration Tool* to *autoload* the <code>rxdlg</code> DLL instead. Just start the Administration Tool by double-clicking on it. The right-hand side of the panel allows you to autoload function libraries. <code>rxdlg.dll</code> may already be listed as autoloaded. If it is not, just press the <code>Add</code> button and add it to the list. Now, none of your scripts will need to include the code to register or load this external function library. This eliminates repetitiously coding these lines at the start of every script. It is a simpler approach, especially when a script accesses several external function libraries.

Because it does not include code to load the REXX Dialog external function library, the script starts by enabling error trap routines. This line is of special interest:

```
call RxErr 'ERROR DISPLAY' /* displays error messages */
```

It is common to invoke RXErr at the start of a Reginald GUI program to establish error handling for the script. This automates error handling very nicely, and replaces explicit code in the script to manage errors. Figure 23-3 shows the kind of output RXErr displays when a programming error occurs. It is both complete and automated.

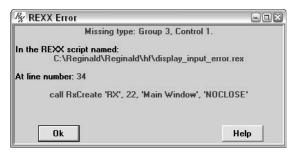


Figure 23-3

REXX Dialog works with *groups*, sets of identical *controls* or *widgets*. The major kinds of groups are listed earlier (Push Button, Entry Box, and so on). To create a window, first assign values to variables that define the appearance and operation of a group. This code, for example, sets the variables for the Menu group:

This code sets variables for the Entry group (the text entry box into which the user types the phrase the program echoes):

The variables that must be set for each group are unique to the type of control. It's not necessary to go into them all here to understand the script. Reginald's comprehensive documentation describes them all and gives examples for each.

Every window must have a *Window ID*. Ours will be named RX. After all group variables have been set, invoke the RXCreate function to display the window:

```
call RxCreate 'RX', 2, 'Main Window', 'NOCLOSE'
```

The first parameter is the Window ID, the second is the number of groups in this window, and the third is the window title. NOCLOSE specifies that the script lets the user manually close the window, rather than automatically closing it for him or her.

With the window displayed to the user, the script enters a loop that repeats until the user manually closes the window and terminates the program. These lines start that loop:

The call to the RxMsg function allows user interaction with the window. Here the call is simple. We just want the script to display the window and wait for user interaction. RxMsg has several parameters for more complicated interactions, for example, to manage interaction with multiple open windows or to clear pending messages for windows.

Control returns to the script after the user takes some action upon the open window. REXX Dialog sets variables so that the script can figure out what the user did: rxid and rxsubid. The simplified interaction in this script checks only for two values of rxid:

```
if RxID == '' then signal halt /* exit if users clicks CLOSE*/
/* display the text the user enters in the ENTRY text box  */
if RxID == '2' then
  button = RxSay(text.1,'OK','You entered...')
```

If rxid is the null string, the script knows the user clicked the close box in the window, so it exits.

If rxid is set to 2, the script knows the user entered a text string into the Entry box and pressed the <ENTER> key. This is the case the script needs to respond to. As shown earlier, the response is to display the text string the user entered in a message box. The RxSay function does this. Its first parameter, text.1, is a variable set to the text string by the user interaction. Figure 23-2 shows that OK is the label of the button the user presses to acknowledge the message box, and that the string You entered... is the title of the message box.

When the user decides to exit, the script terminates by closing the main window:

```
call RxMsg, 'END' /* close ENTRY box window, exit */
```

To summarize, this simple example illustrates the basic logic many REXX Dialog scripts employ:

- **1.** Establish error handling through error traps and the RxErr function
- Set variable values for groups. The variables that need to be set depend on the controls that are used.
- **3.** Call RxCreate to display the window.
- **4.** Call RxMsg to control user interaction with the open window.
- 5. Inspect variables set by REXX Dialog to determine how the user interacted with the window.
- **6.** Close the window and exit with a final call to RxMsg.

More advanced scripts can employ more groups and controls and allow more sophisticated user interaction. This simple script shows how easy it is to get started with basic GUIs. Windows is a highly interactive environment. Along with Reginald's extensive tools and functions, this means you can start scripting Windows GUIs quite quickly.

Another GUI Example

Here's a more advanced GUI script. This one displays an Entry box for user data entry, just like the previous script. But this time, the user enters a wildcard filename with a filename extension. Figure 23-4 shows the user entering the extension *.rex. The script finds all files having that filename extension and displays them in a text box. Figure 23-5 below displays this output.




Figure 23-4

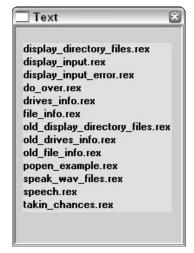


Figure 23-5

Here is the script:

```
call RxCreate 'RX', 2, 'Main Window', 'NOCLOSE'
do forever
                           /* do until user closes window
                                                          * /
  call RxMsg
                           /* invokes user interaction
  if RxID == '' then signal halt /* exit if users clicks CLOSE */
  if RxID == '2' then do
                              /* continue if extension...
     result = '' ; list = ''
     do until result <> ''
                           /* get all files w/ the extension*/
        result = MatchName(, 'File', text.1)
        if result = '' then list = list || File || '|'
     end
     if list = '' then
       call RxSay 'No files with this extension', 'OK', 'Warning!'
     else do
         /* display results in 2nd window, a multiline TEXT box*/
        Rx2 = ''
                                    /* Window ID is 'RX2' */
       Rx2Type.1 = 'TEXT'
                                   /* use a TEXT box */
                                   /* how the text displays*/
        Rx2Flags.1 = 'NOBORDER'
       call RxCreate 'Rx2', 1, 'Text', 'RESULT' /* make window*/
                                    /* do the interaction */
        call RxMsg
     end
  end
```

The script starts by invoking two internal routines that (1) set up the error routines and invoke RxErr and (2) initialize all the variables required for the text Entry box:

These two internal routines are not shown in the preceding listing because their code is exactly the same as in the previous sample script. The line that displays the Entry box is also the same as that of the previous script:

```
call RxCreate 'RX', 2, 'Main Window', 'NOCLOSE'
```

When the user enters a filename extension into the text Entry box, the script identifies this by the fact that REXX Dialog sets the value of rxid to 2. The script enters a do loop that reads filenames with the extension the user requested via the MatchFile function:

```
result = '' ; list = ''
do until result <> ''    /* get all files w/ the extension*/
    result = MatchName(, 'File', text.1)
    if result = '' then list = list || File || '|'
end
```

The MatchName function should look familiar; the earlier sample script named File Info used it to retrieve file information. In this case, no options are encoded for the MatchName function, so it returns a filename that matches the search parameter. The variable text.1 specifies the search parameter. In this case, this search string includes a wildcard. This parameter is the input the user entered into the text entry box. For example, the user might input:

```
*.txt
```

Or the user could input this information as the parameter:

```
*.rex
```

As MatchName retrieves the filenames that match the user's wildcard pattern, the script concatenates them into a list:

```
if err = 0 then list = list || File || '|'
```

Each element in the list is separated by the vertical bar (|). If the list has no elements, no filenames matched the user's search criteria. In this case, the script displays a message box telling the user that no filenames matched the pattern he or she entered:

```
if list = '' then
  call RxSay 'No files with this extension', 'OK', 'Warning!'
```

If some files are found, the script displays them to the user in a text box. This code sets the necessary values for the text box control:

Next, these two lines create the text box window, display it to the user, and control his or her interaction with it:

```
call RxCreate 'Rx2', 1, 'Text', 'RESULT' /* make window*/
call RxMsg /* do the interaction */
```

When the user closes the text box, control returns to the script.

At this point, the user again sees the original text entry box. He or she can enter another wildcard filename pattern, or terminate the program by closing the window.

Chapter 23

This simple program shows how you can integrate Reginald's built-in functions for file management with REXX Dialog GUI functions. Reginald provides a full set of GUI groups, controls, and techniques. We have shown only the basics here. See the REXX Dialog online book that downloads with Reginald for complete information and more scripting examples.

Let My Computer Speak!

The last example can easily be modified to do something other than displaying a list of matching files in a text box. For example, instead of building the list of files and displaying them, code this line as the sole action for each file that matches the user's extension criteria:

```
if err = 0 then File
```

Since File contains the complete filename, this line sends the filename to the default command environment (the operating system), and which executes the file. For example, if the user enters this into the entry box, the program would execute all *.bat files found in the directory.

```
*.bat
```

Similarly, if the user enters the following, the program would send each file in the directory with the *.wav extension to the operating system as a command.

```
*.wav
```

Windows recognizes the "Wave" file as an audio clip, and invokes the Windows Media Player to run it. In this case, the program would run the Media Player for each Wave file in the directory. So, this program could be used to play all the songs or audio clips in a directory, for example.

If you want your computer to talk to you, Reginald's extensive sound libraries can do the job. The external *Speech Function Library* allows scripts to use a synthesized voice to pronounce or speak text. It uses the sound card or speaker to "play" the text. Reginald's *MIDI Rexx Function Library* enables scripts to read, write, play, and record MIDI files. *MIDI*, or *Musical Instrument Digital Interface*, is a standard that allows computerized connection and control of musical instruments. Reginald's MIDI library enables input/output to MIDI ports. Of course, MIDI files are often used just to play music on the PC. They are another PC audio file format.

Let's discuss the Speech Function Library. It allows you to encode text strings in scripts that the sound card on the PC pronounces. What makes this interesting is that scripts can dynamically generate the text strings the sound card speaks. This provides computer-synthesized voice without the need to record audio clips in Wave files or other storage-consuming formats.

How could this be used? Since speech is a generalized computer/human interface, the potential is openended. Use it as complementary output to typical GUI interfaces or to help the visually impaired. In one IT project, the author used synthesized speech combined with a telephone autodialer to phone and read error conditions to support staff on their cell phones. (Well, maybe this was not the best use of this feature. . . .)

To set up Rexx Speech, simply download and install it from the Reginald Web site. Use the Administration Tool to add its DLL, named rxspeech. dll, to the list of autoloaded function libraries. You must also ensure that your Windows PC has a SAPI-compliant speech engine installed. For Windows XP and newer

versions, the operating system comes with this facility installed by default. For older Windows versions, you may have to download and install the SAPI ActiveX control from Microsoft Corporation. The Rexx Speech documentation has the link to the module you require, or just access www.microsoft.com and search for the file named spchapi.exe or for the keywords SAPI speech engine. Once you locate the module, download it and double-click on it for automatic installation. Be sure that your PC's speakers are turned on and working before you verify the installation!

Using the Rexx Speech function library is easy. The library contains about 10 functions, and their use is straightforward and well-documented in the online book that automatically downloads with the library.

Take a look at this sample script:

```
/* SPEECH
/*
                                                        * /
/* Shows how to have your PC speak from text.
/* open the default speech engine, get ready to pronounce text */
voice = SpeechOpen()
if voice == "" then do
  say 'ERROR- could not initialize speech device!'
  return
end
/* Who says computers can't talk?
                                                         * /
error = SpeechSpeak(voice, "This is your computer talking.")
if error \== "" then say 'ERROR- trying to talk: 'error
/* close the speech engine and exit the program
                                                         * /
call SpeechClose voice
exit 0
```

The script readies the speech engine by the SpeechOpen function:

```
voice = SpeechOpen()
```

This initializes the default engine with the default voice and readies it for use. If it returns the null string, it failed. Otherwise, it returns a voice parameter that is used during synthesis:

```
error = SpeechSpeak(voice, "This is your computer talking.")
```

The SpeechSpeak function should pronounce the string This is your computer talking. using the voice designated by the voice parameter. If it fails, it returns an error message. Otherwise it returns the null string.

Chapter 23

When the program is done using the speech engine, it closes it by the SpeechClose function:

```
call SpeechClose voice
```

That's all there is to it. Let's look at some other features of the Rexx Speech Library. The SpeechVoiceDlg function, for example, automatically pops up a list of voices from the speech engine, from which the user can select the voice to use. You might invoke SpeechVoiceDlg at the start of the script to allow the user to select the voice the script employs:

```
id = SpeechVoiceDlg()
if id == "" then do
    say 'ERROR- could not get speech device ID!'
    return
end

voice = SpeechOpen(id)
if voice == "" then do
    say 'ERROR- could not initialize speech device!'
    return
end
```

In this case, SpeechVoiceDlg returns a value that indicates which voice the user selected from the automatic dialog. Feeding this parameter into the SpeechOpen call means that subsequent invocations of SpeechSpeak use this voice.

Prior to the calls to SpeechSpeak that synthesize the voice, you may want to make calls to:

- ☐ SpeechVolume Controls the volume setting
- ☐ SpeechPitch—Sets the pitch
- ☐ SpeechSpeed —Sets the speed of the speaking voice

All three functions take the voice as their input parameter. The functions can be used to either set or retrieve current settings.

GUI scripts that use REXX Dialog have the special feature that they can *asynchronously* control speech synthesis. The reason is that scripts need to synchronize user actions with voice. Rexx Speech's *asynchronous speech* controls ensure that what is spoken matches the GUI interaction.

MIDI Rexx

Now let's discuss MIDI Rexx. This external function library allows scripts to create, edit, save, play, and record MIDI files. This could either be used by musicians to integrate computers into their instrumentation, or by the typical PC user to play music files.

To set up the PC environment, download and install the MIDI Rexx package from the Reginald Web site. It consists of two self-extracting files: midifile.exe and genmidi.exe. At the end of the installation, you will have these two new DLLs on your system:

- \Box The MIDI file \rightarrow midirexx.dll
- ☐ The GenMidi file→genmidi.dll

As always, we recommend using Reginald's convenient autoload feature for access to the MIDI interface from your scripts.

The typical MIDI script operates in this manner. First, it either loads an existing MIDI file into memory (RAM), or it creates a new empty MIDI file in memory. Call the MIDIOpenFile function once to establish the existing or new MIDI file in memory. All subsequent MIDI operations apply to a file in memory.

MIDI files consist of *tracks* and *events*. Tracks are the larger entity, and multiple events occur within each track. MIDI Rexx allows scripts to add, modify, and delete events within tracks, add or delete tracks, and perform other kinds of processing.

When a script creates a new MIDI file, it adds tracks or events by invoking the MIDISetEvent function. If the script loads an existing MIDI file, it typically calls MIDITrack to set the search track. Then it accesses individual events by calls to MIDIGetEvent. Scripts typically access one event at a time by calls to MIDIGetEvent to perform their processing. MIDISetEvent allows scripts to change aspects of the currently selected event. When scripts are through processing a MIDI file, they save it to disk by the MIDISaveFile function.

In a manner very similar to the Rexx Speech Library, MIDI Rexx passes information to and from scripts through a set of variables. The documentation clearly explains what variables are relevant to each MIDI Rexx function and how they are used. Here's a list of the MIDI Rexx functions:

MIDI Function	Use
MIDICtlName	Returns the controller name
MIDICtlNum	Returns controller number for a controller name
MIDIEventProp	Returns information about an event
MIDIGetEvent	Searches for the next event matching some criteria
MIDIGetInfo	Returns information about the currently loaded MIDI file
MIDIGetGMDrum	Returns a MIDI drum key name or note number
MIDIGetGMPgm	Returns the MIDI program name
MIDINoteName	Returns the note name for a note number
MIDINoteNum	Returns the note number for a note name
MIDIOpenFile	Loads a MIDI file into memory, or creates a new MIDI file in memory
MIDIPortName	Returns the MIDI port name for a specified port number
MIDISaveFile	Saves a MIDI file from memory to disk
MIDISetEvent	Inserts a new event or updates an existing one; can also delete event(s) or tracks.
MIDISysex	Returns bytes from the currently selected Sysex event
MIDITrack	Sets or queries the track for searches

Accessing the Windows Registry

Reginald provides complete access to the Windows Registry. Directories and subdirectories can be accessed, created, and deleted. *Files* or individual entries can be read, updated, created, and deleted.

The Windows Registry is essential to Windows' operation. Before running any program against it, be aware that faulty updates can damage the operating system or even render it inoperable. Always back up the Registry before working with it. To do this, select the Run... option from the Windows Start button. Start one of the Registry editors, for example, by entering regedit as the command in the Run box. Within the Registry Editor, select File | Export... and export the entire Registry to a file.

Review how your particular version of Windows backs up and recoveries the Registry and other vital system information before running any test program against the Registry. Better yet, test any program that interacts with the Registry on a test instance of Windows.

For maximum safety, programs that manipulate the Registry should always verify return codes. The sample script omits error checking in the interest of brevity and clarity.

By default, Reginald functions work in the Current User section of the Registry (HKEY_CURRENT_USER). After discussing the sample script, we'll show how to access other portions of the Registry.

The sample script performs these Registry operations:

- 1. Creates a new directory and a new subdirectory to it in Current User
- **2.** Creates a new file (entry) in the subdirectory
- **3.** Retrieves and displays the value assigned to the new file in the Registry
- 4. Pauses so that the user can see the new directory, subdirectory, and file through the Registry Editor
- **5.** Deletes the new file
- **6.** Determines whether the new file was deleted and writes a confirming message
- **7.** Deletes the subdirectory and directory
- **8.** Pauses so that the user can confirm all deletions through the Registry Editor

The logic of the script is simple. It just performs one operation after another. It uses the value function to read and change Registry values. Here is the script:

```
fd = value("My Dir\My Sub-Dir\", , "WIN32")
/* create and display a file within that subdirectory
fd = value("My Dir\My Sub-Dir\My File","TEST DATA ONLY","WIN32")
say 'Registry data:' value("My Dir\My Sub-Dir\My File", , "WIN32")
say 'Press <ENTER> to continue...' ; pull .
/* delete the registry file and prove that it is gone
fd = value("", "My Dir\My Sub-Dir\My File", "WIN32")
if value("My Dir\My Sub-Dir\", "My File", "WIN32") == 1
   then say 'Registry file exists'
   else say 'Registry file has been deleted'
/* delete the directory and subdirectory we created
fd = value("", "My Dir\My Sub-Dir\", "WIN32")
fd = value("", "My Dir\",
                                     "WIN32")
say 'Registry directory and subdirectory have been deleted'
say 'Press <ENTER> to exit...'; pull .
exit 0
```

In the script, these two lines create the directory, then the subdirectory:

The value call specifies the first parameter as a directory or subdirectory, which must end with the backslash (\). The second parameter is omitted and the third parameter is the environment, which will always be WIN32 when accessing the Registry. value returns a null string if successful. If the directory already exists, no error occurs.

Next, this line creates a new file entry within the new directory and subdirectory. The first parameter specifies the location and the second, the new value to insert. This script inserts a new file with the value: TEST DATA ONLY. If the file already exists, this action overwrites any previous entry:

```
fd = value("My Dir\My Sub-Dir\My File","TEST DATA ONLY","WIN32")
```

Next, this line retrieves the new file value the script just inserted and displays it on to the user. Because no second parameter or "new value" is specified, this value call retrieves information:

```
say 'Registry data:' value("My Dir\My Sub-Dir\My File", , "WIN32")
```

Chapter 23

At this point, the script pauses so that the user can verify the new Registry information via the Registry Editor:

```
say 'Press <ENTER> to continue...'; pull .
```

To verify the new Registry entries, just open a separate window while the script waits, and access the Windows Registry Editor from within this new window. Now you can inspect the Register to see the changes the script made. Assuming the new file value and its directory and subdirectory appear, the user presses the <ENTER> key to continue processing. If there is a problem, he or she can press Ctrl-C to abort the script.

Having made its Registry updates, the script cleans up after itself by deleting the information it added to the Registry. Next, this line deletes the file entry. The absence of the first parameter specifies deletion. No error occurs if there is no such file to delete:

```
fd = value("", "My Dir\My Sub-Dir\My File", "WIN32")
```

Then the script deletes the directory and subdirectory it previously created:

```
fd = value("", "My Dir\My Sub-Dir\", "WIN32")
fd = value("", "My Dir\", "WIN32")
```

The script ends by pausing so that the user can use the Registry Editor to verify that the Registry has been properly cleaned up.

By default, Reginald functions work in the Current User section of the Registry (HKEY_CURRENT_USER). To work in other areas of the Registry, just specify the location as the first part of the directory name. This example retrieves a value from within HKEY_LOCAL_MACHINE:

```
seed = value("HKEY_LOCAL_MACHINE\HARDWARE\SYSTEM\WPA\PnP\SEED",,"WIN32")
```

To summarize, Reginald scripts can perform any desired Registry operation. Reginald provides a simple, straightforward set of functions for this purpose. Back up your Registry before testing or running any programs that alter it.

Summary

This chapter gives a quick summary of Reginald's comprehensive Windows programming environment. It delves into a bit of detail in only the areas of GUI management and file management. These epitomize the OS-specific features Reginald offers Windows programmers.

Reginald distinguishes itself by its integration into Windows, its ability to program the Windows environment, and its comprehensive self-teaching documentation. Reginald presents an easy-to-use, yet powerful, alternative to proprietary Windows-programming technologies.

This chapter also presented several sample scripts that demonstrate the extended features of Reginald Rexx. They demonstrate several file functions, and also a bit about how to create GUI interfaces with REXX Dialog. We looked into speech synthesis and the MIDI interface, and finally presented a script that accessed and updated the Windows Registry.

These sample scripts only suggest the wide-reaching functionality of the Reginald package. While Reginald is powerful, its complete documentation makes it easy to get started. Windows developers are urged to download and investigate the tools for themselves.

Test Your Understanding

- **1.** What are some of Reginald's key advantages?
- **2.** What kinds of documentation come with Reginald? Would you need any documentation beyond what downloads with the package in order to use it?
- **3.** What functions do you use to give Reginald access to external function libraries (DLLs)? Do you need to code these functions in every script that uses external libraries?
- **4.** Can Reginald scripts access Microsoft Excel spreadsheet data or Microsoft Access databases? If so, how? How do Reginald scripts access MySQL and PostgreSQL databases?
- **5.** Your boss has told you that you'll be developing Web site code using the Common Gateway Interface (CGI). You have to start on it by Monday! Where can you get a tutorial on how to do this and get up to speed in a hurry?
- **6.** What two functions provide information about disk drives? What function do you code to retrieve file attribute information? Does the file have to be opened before you can retrieve this information?
- **7.** What function would you use to read binary information written to a file by a C++ program?
- **8.** How does Reginald read and/or write arrays in one statement?
- **9.** If you've never written a GUI using REXX Dialog, what package might you use to help generate skeletal code?
- **10.** What do these key REXX Dialog functions do: RxErr, RxCreate, RxMsg? How do they fit together in the basic logic of many REXX Dialog programs? What variables do REXX Dialog scripts analyze to discover what the user did?
- **11.** Compare the purposes of the Speech and MIDI Function Libraries. How do they differ? Which would you use to send control information to a keyboard instrument? Which would you use to read a document aloud?

Single Board Computers

by Howard Fosdick and Tony Dycks

Overview

One of the amazing features of Rexx is that it runs on computers ranging from the world's largest supercomputers down to the smallest devices. And it works very effectively on that wide range of computers.

This chapter takes a look at Rexx scripting on the smallest computers: single board computers, or SBCs. We'll introduce the terminology of this world, and how programming projects must adapt to the constraints it presents. Then we'll talk specifically about how Rexx can be deployed to benefit. We'll give examples from experience about how to install and take advantage of Rexx, Open Object Rexx (or ooRexx), and NetRexx on SBCs.

In the next chapter we'll explore the related topic of how to run Rexx on cell phones and other handheld devices. While programming smart phones differs from that of single board computers, some of the hardware constraints you'll face when working with those small devices are similar.

SBCs

Single board computers are complete computers built on a single circuit board. This includes a microprocessor chip, memory, input/output devices, and the supporting circuitry needed to create a fully functional computer. SBCs differ from desktops in that they don't rely on expansion slots, large cases, extensive cooling systems, or large-footprint disk drives. SBCs differ from laptops in that they are not typically packaged with human interface devices like display screens, keyboards, touchpads, or mice. SBCs strip a computer down to its essentials.

SBCs often rely on SoC's, or Systems On a Chip to achieve their density. SoC's integrate most key computer functions onto a single chip. This minimizes space, power, and cooling requirements – fundamental design requirements for SBCs. SoC's may include the processor, memory, input/output control, graphics processing, cache memory, and other circuitry. Specialized SocC's can include such additional features as communications interfaces, radio modems, digital or analog signal processing, or other functions. It all depends on the specific use for which the SoC is designed.

To summarize some of the differences between SBCs and traditional desktop and laptop computers:

Ц	Higher density of functional integration (based on higher levels of single-substrate circuitry integration)
	SoC's are common
	ARM or other processors are common (rather than Intel or AMD CPUs)
	Resources like processing power and memory may be lesser than desktops or laptops
	May use SD (Secure Digital) cards for storage, rather than disk drives. Mini forms like SDHC / SDXC / SDUC are common, as are other form factors like micro-SD. Inexpensive eMMC flash storage is also common.
	Rarely bundles human-interface peripherals like displays, touchpads, keyboards, mice, etc
	Cases are optional, since embedded uses are common

Uses

The allure of SBCs is that their small size, and correspondingly low power and cooling requirements, mean that they fit an incredibly wide range of different applications. Educational use, home automation, intelligent machines, media streaming, hobbyist experimentation, robotic control, factory automation, cell phones, tablets, and the Internet of Things (IoT), all spring to mind as use cases.

In *embedded computing*, the SBC becomes part of a larger product. It may represent "the brains" or intelligent controller for the machine in which it resides. Embedded systems often control real-time operations and must be responsive to their specific domain. Factory robots offer an example.


Physical computing refers to how systems can sense and respond to the world in which they exist. Various kinds of sensors enable the SBC to gather information about its environment, and then respond to changes in that environment using the physical capabilities it controls.

In all these cases, the SBC is part of a *dedicated system*: a specialized computer designed and assigned to a specific purpose. This is as opposed to a *general purpose* computer like your laptop or desktop.

The market for SBCs has exploded since 2012 when the first truly popular product came on the market – the Raspberry Pi. In the past year alone, some 50 million Raspberry Pi's were sold. Of course, the original Pi has evolved into a family of SBCs with different sized boards and capabilities.

Dozens of companies now compete head-to-head with the Pi. As we transition into the Internet of Things, the future appears bright for future growth of the SBC marketplace.

SBCs vary widely in capabilities, size, power, heat dissipation, and other features. To give you a more concrete idea of functions, take a look at this typical board layout:

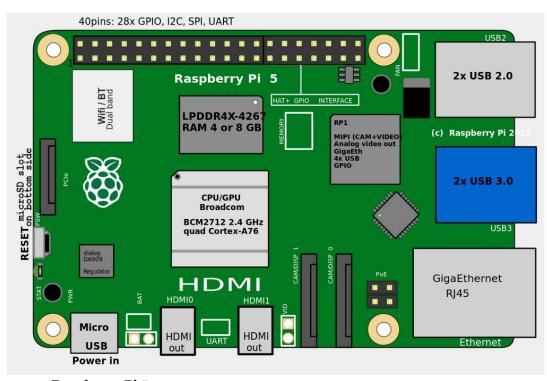

Raspberry Pi 5 (courtesy of SparkFun Electronics via Wikipedia CC BY 2.0)

The Software Stack

Desktops and laptops are highly standardized compared to SBCs. You can take a popular operating system (OS) and graphical user interface (GUI), and expect them to work right out of the box when installed. SBCs differ much more among themselves. Depending on the board and its architecture, you may find some software products work better than others – and some may not work at all. What the projects in this chapter prove is that once you have a working operating system environment, you can be assured that Rexx will run as well.

Given that SBCs typically offer lesser processor and memory resources, it's important to select a lightweight operating system as host. Various forms of Linux are popular: they're open source and highly configurable, not to mention that they cost nothing up-front and are free of commercial license entanglements. Many lightweight and ultra-light versions are available.

Graphical user interfaces are well-known as heavy resource consumers, so a lightweight GUI is also needed. It may be desirable to run *headless* in some situations, that is, without a monitor. In other cases, run with a line command interface. Next up the ladder in resource requirements are *Windows Managers*, software that provides basic GUI functions without all the bells and whistles. And finally, there are complete *Desktop Environments*: easiest to use and most convenient, but also most expensive in terms of resource use.

In our projects, we found it necessary to test a number of Linux distributions and interfaces to discover what worked best with our specific SBCs. We won't get into that here, as what you'll need will be based on your specific SBC hardware and its architecture. Suffice it to say, if your SBC is not certified for the operating system you select, some testing or experimentation may be necessary.

Rexx

Given its unique combination of programming simplicity with power, it's not surprising that Rexx has a long history with small devices. In the first edition of this book some years ago, we described how Rexx worked with Pocket PCs, Windows CE, Windows Handheld, Windows Mobile, Palm OS, Nokia's Symbian OS, EPOC32, and EPOC. The next chapter tells how to run it on Android.

Rexx also works well with embedded DOS in all its forms, including DOS emulation. DOS versions like FreeDOS, ROM-DOS, PTS-DOS, RxDOS, and REAL/32 continue to be popular for SBCs and embedded systems, as do DOS emulators like DOSBox, Magic DosBox, and others.

Thus, in the small-systems universe, Rexx has proven itself as:

	Simple
	Capable
	Lightweight and fast
	Stable (lacking need for upgrades caused by a constantly-evolving product)
	Well standardized (with universal adherence to the TRL-2 and ANSI-1996 standards)

Open Object Rexx

Open Object Rexx (or ooRexx) is a true superset of classic Rexx that adds full object-oriented programming capabilities. It's useful for SBCs because it allows you to either program procedurally or with object-oriented classes and methods. (And, as chapters 27, 28, and the appendix on ooRexx classes shows, the language offers a very full range of classes and methods.)

BSF4ooRexx

Java's popularity as a programming language has led to its becoming a standard interface language for all sorts of platforms and projects. You can add full Java support and the Java libraries to ooRexx by installing a tool called *BSF4ooRexx*. BSF4ooRexx stands for *Bean Scripting Framework for ooRexx*. It provides a full-fledged bridge between ooRexx and Java. With it, you can exploit the power of Java classes, methods, and other features from within the easy-to-use ooRexx scripting language.

In short, everything available in Java becomes available from ooRexx:

All Java class libraries and their methods
Full access to whatever Java or its tools and libraries can control
Camouflages Java as ooRexx (Java appears to be dynamic and message based)
Allows you to escape some aspects of Java you might consider irrelevant in a tightly-controlled and carefully programmed SBC environment (eg, strict typing, its C/C++ influenced syntax, etc)
Allows you to benefit from a language that is simpler to code than Java while retaining its benefits and power

Of course, to use BSF4ooRexx you must install the requisite Java runtime software support.

NetRexx

Another way to reap the benefits of Java and its power while realizing a simpler programming interface is to install NetRexx.

Like ooRexx, NetRexx yields all Java's capabilities within the context of a simpler language. But there is at least one important difference: while ooRexx is a true superset of classic Rexx, NetRexx is best described as a "Rexx-like" language. It is not syntax-compatible with traditional Rexx.

With NetRexx, you can write Java applications and beans. On the server side, you can create servlets and Java Server Pages. NetRexx scripts ultimately compile into Java byte code. They use the Java Virtual Machine. (In fact, NetRexx was the first language after Java itself to take advantage of the JVM.)

As with the ooRexx/BSF4ooRexx combination, with NetRexx you need to install the supporting Java facilities. Chapter 30 goes into more detail about NetRexx, its installation, uses, and basic programming examples.

Pi Feasibility Projects

We conducted several projects using Rexx on the Pi. One project assessed and compared the viability and performance of several Linux distributions that employ the RPM Package Manager (RPM). We tested Red Hat, CentOS, openSUSE, Alma, and Oracle Linux.

A second project was to determine if we could install a full Linux distribution with a Windows Manager, and then a full Rexx stack on top of that – all on a Raspberry Pi Zero or its equivalent, the lowest-end, least expensive Pi. This SBC had only 1 gigabyte of memory. For this project, we used Debian Linux.

For the operating systems we installed the versions required for the ARM processors. We used tools like Balena Etcher or the Raspberry Pi Imager to burn images to SD cards, and FileZilla for transferring files from a Windows PC on the network to the Pi storage card. (Not all SBCs have internet connectivity.) We used Apache's Subversion utility to ensure correct package selection and installation.

The Rexx stack we installed included:

		NetRexx
		ooRexx
		BSF4ooRexx (the ooRexx – Java interface)
		Regina Rexx
		Rexx/CURL (for internet communications)
For our	proje	cts, we decided on these prerequisites for the products:
		NetRexx a Java Development Kit (JDK) package
		ooRexx Package: libncurses-dev for terminal control
		BSF4ooRexx – a Java Development Kit (JDK) package, plus ooRexx
		Regina Package: build-essential (compiler suite for source code build)
		Rexx/CURL Debian Package: libcurl4-openssl-dev

Here's an example of how we started by installing some software prerequisites:

```
sudo apt install subversion
sudo apt install cmake
sudo apt install g++
sudo apt install libncurses5-dev
```

subversion is Apache's Subversion software control system. cmake and g++ allow for compiling from source code, and libnourses is the library we wanted to use for text-based terminal control.

You can substitute in the package manager for your platform if needed (eg, substitute yum or zypper or dnf in place of apt).

Installing a JDK

Next, we decided to install and make available a Java Development Kit (JDK) as a prerequisite for ooRexx with BSF4ooRexx and also for NetRexx. They minimally require a Java runtime environment.

Several different JDKs are available. Among them are those from Oracle Corporation, BellSoft, and the open source product, OpenJDK. We selected the last of these three options.

Here's an example of how to install OpenJDK using the RPM Package Manager yum command:

```
yum search openjdk
sudo yum install openjdk-1.8
export JAVA_HOME=/usr/lib64/jvm/java-1.8.0
export PATH=$JAVA_HOME/bin:$PATH
javac -version
```

You can use the first command to search for the OpenJDK. The second line installs the OpenJDK.

The two export lines establish required environmental variables, \$JAVA_HOME and a new search \$PATH. In Linux you can set these in the .bashrc login file for the particular login user id you use.

The final line simply double-checks the install version and verifies the environmental variables.

In some distributions, for example openSUSE, you can issue the exact same code, except that you can replace the yum command with the zypper command.

Installing NetRexx

With the Java prerequisites in place, we move on to installing NetRexx. First, download NetRexx from any of several websites, such as NetRexx.org or its project home at Sourceforge.net. We used http://www.netrexx.org/downloads.nsp. Then we followed these steps.

1. Create a netrexx subdirectory off the /opt Path:

```
cd /opt
sudo mkdir netrexx
```

2. Copy the download file to the system's /opt/netrexx directory:

```
sudo cp $HOME/Downloads/NetRexx3.09GA.zip /opt/netrexx
```

3. Decompress (unzip) the downloaded archive file:

```
cd /opt/netrexx
sudo unzip NetRexx3.09GA.zip
```

4. Update CLASSPATH and PATH environmental variables in your login profile:

```
export PATH=$PATH:/opt/netrexx/bin
export CLASSPATH=$CLASSPATH:/opt/netrexx/NetRexxC.jar:.
```

Installing ooRexx

Next, we'll install ooRexx. We do this by making a new directory for it called oorexx and a subdirectory called build.

```
cd $HOME
sudo mkdir oorexx
cd oorexx
sudo mkdir build
cd build
```

The svn checkout command brings the ooRexx code into the directory: oorexx-code-0

```
svn checkout svn://svn.code.sf.net/p/oorexx/code-0/main/trunk oorexx-code-0 cd oorexx-code-0 sudo cmake . sudo make install rexx -V
```

cmake sets up for the make and install commands, and we finish by verifying our work at the end by checking the interpreter's version.

Installing BSF4ooRexx

Find BSF4ooRexx at its Sourceforge home, at the URL sourceforge.net/projects/bsf4oorexx/.

Download the BSF4ooRexx install compressed file (its .zip file) into a directory of your choosing, and uncompress it. The default installation will reside in /opt/BSF4ooRexx.

Change to the subdirectory holding the install script and run that script:

```
cd $HOME/bsf4oorexx/install/linux
sudo sh ./install.sh
```

Now copy the JAR file to the Java JRE Extensions Library and refresh the load library cache:

```
sudo cp bsf*.jar $JAVA_HOME/jre/lib/ext
sudo ldconfig
```

Run a test program to ensure BSF400Rexx is installed and working properly:

```
cd /opt/BSF4ooRexx
sh ./rexxj2.sh ./samples/classicRexxSamples/GetJavaSystemProperties.rxj
```

Now you have a fully functional Rexx stack with both ooRexx/BSF4ooRexx and NetRexx. You can code Rexx or NetRexx with complete Java functionality available.

Installing Regina Rexx

In order to have concurrent access to both ooRexx and Regina, the binary packages should reside in different /usr prefix directories. The is because two binary executable files exist in both ooRexx and Regina: rexx and rxqueue. Using different directories for ooRexx and Regina thus avoids naming conflicts. We installed ooRexx in the /usr/local directory, then BSF4ooRexx, and finally Regina in the /usr directory.

Here is how we installed the Regina Rexx interpreter from source code:

```
cd /usr/local
sudo cp $HOME/Downloads/regina-rexx-3.9.5.tar.gz .
sudo tar xvzf regina-rexx-3.9.5
cd regina-rexx-3.9.5
sudo ./configure -prefix=/usr
sudo make
sudo make install
```

To test Regina to ensure it's installed properly, check the version number: regina -v

Here are the commands by which we installed Rexx/CURL from a source "tarball" on a Debian system:

```
cd /usr/local
sudo apt install libcurl4-openssl-dev
sudo cp $HOME/Downloads/RexxCURL-2.1.0.tar.gz .
sudo tar xvzf RexxCURL-2.1.0.tar.gz
cd RexxCURL-2.1.0
sudo ./configure -prefix=/usr
sudo make
sudo make install
```

As always, we finish by testing for the product presence and its version: rexxcurl -v

We concluded by running some of the test programs can be found in /usr/share/rexxcurl

While we installed Regina and Rexx/CURL from source code, you could alternatively install from .deb packages (or .rpm or .apk files in other Linux distributions). It all depends on your package manager.

Practical Application

Marcel Dür of the Vienna University of Economics and Business wrote a thesis that demonstrates how to control the hardware functions of a Raspberry Pi SBC by programming it in ooRexx with BSF4ooRexx.

His programs manage the input/output of various Pi electrical pins that could be used to acquire information through environmental sensors, or send out signals to control equipment functions. We'll walk through two of his example programs.

First, install ooRexx and BSF4ooRexx as previously shown. Then, you need to install software that supports a software interface to the Pi's hardware functions. You can pick any of several options:

- 1. Pi4J software from https://www.pi4j.com/ or GitHub at https://github.com/Pi4J
- 2. Pigpio (lower-level software that comes with Pi4J)
- 3. WiringPi at GitHub at github.com/WiringPi/WiringPi

Then, you must enable the Pi's interfaces by this line command: sudo raspi-config

Let's start with a very simple example program that turns an LED light off and on. It switches a defined GPIO, called LED, between and high and low states in 1 second intervals. With apologies to the author for redacting some of his nice documentation, here's the code:

```
/*load required java classes*/
gpio = bsf.loadClass("com.pi4j.io.gpio.GpioFactory")~getInstance
RaspiPin = bsf.loadClass("com.pi4j.io.gpio.RaspiPin")
pinstate = bsf.loadClass("com.pi4j.io.gpio.PinState")
/*creates a digital output and set status of the output to low
used output Pin --> GPIO 29*/
LED =gpio~provisionDigitalOutputPin(RaspiPin~GPIO 29,pinstate~low)
-- Switch output pin on and off
say "program started"
do forever
   LED~high
                       -- turn output/LED on
    call syssleep 1
   LED~low
                       -- turn output/LED off
    call syssleep 1
end
exit
::requires BSF.CLS -- get Java support
```

Let's walk through this code. First, the script initializes by loading Java classes via BSF400Rexx. These classes reside in the Pi4J JAR archive:

```
gpio=bsf.loadClass("com.pi4j.io.gpio.GpioFactory")~getInstance
RaspiPin=bsf.loadClass("com.pi4j.io.gpio.RaspiPin")
pinstate=bsf.loadClass("com.pi4j.io.gpio.PinState")
```

This line identifies CPIO pin 29 for output, and assigns it to the default low state:

```
LED=gpio~provisionDigitalOutputPin(RaspiPin~GPIO 29,pinstate~low)
```

Here's the driver. The last line is required to enable Java support via BSF400Rexx:

Depending on how Pi is connected to other devices, you could use simple pin manipulation like this to control many other devices and their functions.

Now, here's the exact same program using WiringPi software support instead of PiJ4:

```
-- define GPIO pin as output
address system "gpio mode 29 out"

-- define initial state of GPIO pin(GPIO 29) --> default "LOW"
address system "gpio write 29 0"

-- Switch outputpin on and off

say "program started"
do forever
   address system "gpio write 29 1" -- turn output/LED on call syssleep 1
   address system "gpio write 29 0" -- turn output/LED off call syssleep 1
end
exit
```

This version of the program is coded procedurally – instead of with objects -- by using address system calls. As we previously stated, ooRexx supports either approach to programming. So you have choice. In both cases, you still have access to all Java capabilities through BSF4ooRexx.

Here's a second example program from Mr Dür. The Raspberry Pi can control devices using its hardware PWM pin. This program rotates the arm of a SG90 servomechanism up a maximum of +90 or -90 degrees, as based on the user's input parameter:

```
GPIO PWM
/*
                             with WiringPi support
/* This example demonstrates the use of the PWM function of the
/* Raspberry Pi. As an example, an SG90 servo is controlled with it. */
/* The servo can rotate approximately 180°
/*-----
-- Operating frequency of the servo is 50 Hz -> 20ms PWM Period
--set GPIO Pin 26 to PWM mode
address system "gpio mode 26 pwm"
address system "gpio pwm-ms" -- PWM mark space mode address system "gpio pwmc 192" -- PWM clock divider address system "gpio pwmr 2000" -- PWM range
--Duty cycle = 0,5 -2,5 ms --> values between 50 and 250 --Duty cycle 150 = 0° --> 50 =-90° --> 250 = 180°
address system "gpio pwm 26 150" \, --set servo to 0^{\circ}
do forever
say " Enter a value between 50 and 250 "
parse pull angle
   if angle >49 & angle < 251 then do
         command = "gpio pwm 26 " angle
         address system command
   else say "wrong input - must be between 50 and 250 "
end
exit
```

The lines that start with address system perform the setup required for an SG90 servo. These details are as documented in its specifications and those of the attached Raspberry Pi.

Then the do loop reads a user input and translates it into the gpio command to manipulate the servo.

This program demonstrates you can drive SBC hardware to monitor and control attached devices through ooRexx with BSF4ooRexx, instead of using harder-to-code Java.

Summary

With an exploding population of single board computers and the rise of the Internet of Things, the need for simple ways to program all these devices becomes critical.

Rexx offers a simple, proven solution. It's small size, standardization, stability, portability, and power all render it suitable for addressing this need. It's also open source and freely available.

Classic Rexx is one option. It's simple and interfaces to hundreds of free and open source tools. ooRexx expands upon this base by adding object-oriented capabilities. In conjunction with BSF4ooRexx, it opens up the full power of Java and its libraries to the simple syntax of Rexx. NetRexx, too, enables programmers to climb opon Java's capable shoulders while enabling simpler coding solutions.

In the first projects we described, we presented line commands that set up a full Rexx stack including classic Rexx, Object Rexx, and NetRexx. The latter two were armed with full Java capabilities. Whatever Java can do in their environment, they can do.

The last two example programs showed how easy it can be to control low-level Pi functions with the proper software stack. ooRexx with BSF400Rexx is an essential piece of the puzzle: it helps you perform any function Java can with the Pi while presenting a simpler, cleaner interface.

Test Your Understanding

- What are key differences between single board computers, and desktops and laptops. How do these differences affect your coding solutions?
- **2.** Why are so many SBCs sold without cases?
- **3.** Among classic Rexx, ooRexx, and NetRexx, which require Java support as their prerequisite? What JDK's are available?
- **4.** What is Apache Subversion? Why might you use it?
- 5. What is BSF4ooRexx and how is it used? Do you need to install it to code Java Beans in NetRexx?
- **6.** Say you're a system administrator who codes procedurally in Bash and Rexx. Do you need to learn object-oriented programming to code with ooRexx?
- **7.** You want to program a Pi to control a robot. How would you manage access to the pins to control the necessary hardware functions?

Rexx on Android

Overview

As discussed in the previous chapter, Rexx has a long history of running on handhelds and cell phones. Rexx ran on now-obsolete devices like Palm Pilots, Nokia phones, and Pocket PCs.

Rexx continues its strengths on small devices today in its use on Android cell phones and tablets. Android is by far the most popular operating system in the world for smartphones, and it has been for many years. It's also widely used for tablets and specialty handhelds. Apple's iOS is its only rival. Together, the two products wield a duopoly over phones and tablets.

Android is developed by Google and the Open Handset Alliance. Most of Android is free and open source software, though the Google version does include some proprietary code. Android is based on a modified Linux kernel at its core. It then layers on much Android-unique code, including mobile applications, its own Application Programming Interface (or API), and middleware.

This chapter explores three different ways to run Rexx on Android. Each has its benefits and limitations. We'll enumerate the kinds of tasks you can achieve by programming your Android, and walk you through some coding examples. By the end of this chapter, you'll be able to decide whether you're interested in further exploring Android scripting, and you'll know how to go about it.

Let's get started.

Three Options

There are at least three Rexx interpreters	available on Android.	We'll discuss	each in its own
section:			

BRexx
Rexx for Android (also known as "Rexxoid")
ooRexx for Android

BRexx

We discussed BRexx in chapter 22, and explored its utility on small devices. Now we'll discuss its use specifically with Android.

To run BRexx on Android, you need a software interface called the *Scripting Layer for Android* (or SL4A). SL4A allows developers to automate Android tasks in scripting languages instead of using Java. One of those scripting languages is Rexx. The advantage, of course, is that Rexx has simpler syntax than Java. Also, it's much faster and easier to develop with an interpreted scripting language than a compiled language like Java.

SL4A is a *scripting host*. It makes the Android API available to scripts through various interfaces called *facades*, designed to make programming easier. Some of the available functions are those for the camera, location, media recorder, media player, battery manager, and more. BRexx gives you a simple way to tap into this.

Since SL4A is a prerequisite, you need to download and install it first. It is hosted at GitHub as project **sl4a**. Note that there have been questions about this project's continuation, so you may need to download a fork instead. In this case, just search for "SL4A" at the GitHub repository.

Next, download BRexx from its homes at GitHub https://github.com/vlachoudis/brexx or SourceForge at https://sourceforge.net/projects/brexx/. Be sure your download includes the file android.r. At the time of writing, BRexx is not available in the Google Play Store. This may mean you need permission to install on your Android from third party or external sources.

After installing these two items, start up SL4A, then navigate to the Android folder. You'll find a list of Rexx scripts, all with BRexx's traditional file suffix of .r. From there you can run, edit, save, or delete scripts.

Example BRexx Scripts

Let's take a look at a few sample programs. Here's the traditional "Hello World" script:

```
call import "android.r"
call AndroidInit
msg = "Hello, World"
call makeToast msg
```

The first two lines start every BRexx Android script. They perform the necessary initialization of the environment. They load the BRexx Android functions and establish communications with SL4A.

The last two lines set up and send the message to the screen. In Android, a *toast* is message that appears for a few seconds on the screen without disturbing the user, and then disappears. The call to makeToast via the Android API sends the toast to the user and makes the message appear on his screen.

How about we take a photograph? Here's an example script distributed with BRexx for the task. The cameraCapturePicture facade places the image in the filename specified by its operand:

```
call import "android.r"
call AndroidInit
call cameraCapturePicture "/mnt/sdcard/foo.jpg"
```

Or we could engage the user in an echoing dialog. The dialogGetInput call prompts the user for input and receives it, while the ttsSpeak facade speaks its operand to the user:

```
call import "android.r"
call AndroidInit
message = dialogGetInput("TTS","What would you like to say?")
say "Message=" message
call ttsSpeak message
```

Here's a more complete example. It was written by Eva Gerger of the Vienna University of Economics and Business in her thesis on Android programming with BRexx.

The program retrieves the status of the battery and displays it to the user as a percentage.

```
call import "android.r"
call AndroidInit
call batteryStartMonitoring
call eventWaitFor "battery", 5000
a = batteryGetLevel()
say a
call batteryStopMonitoring
call makeToast Batterylevel a
```

In this script, the <code>batteryStartMonitoring</code> call initiates battery monitoring. Monitoring takes time to develop results, so <code>eventWaitFor</code> waits of up to 5000 milliseconds for a battery event to transpire.

Eventually the script captures the battery level via batteryGetLevel. Then it stops battery monitoring with batteryStopMonitoring, and displays the result via makeToast.

Here's another illustrative script by Eva Gerger. This one will send SMS text messages to the number of individuals the user specifies in response to the initial dialogGetInput prompt.

```
call import "android.r"
call AndroidInit
x = dialogGetInput("Number of SMS to send", "Please enter number of SMS to send:")
do i = 1 to x
   nr = dialogGetInput("Phone number", "Please enter phone number:")
   call smsSend "tel:"nr, "You are number "i
end
```

The do loop is executed for as many times as the user entered. Inside the loop, the dialogGetInput function prompts the user to enter a phone number. Then, the smsSend call sends a text to the entered phone number stating that "You are number" followed by an ascending integer.

Location Example

Ever wonder how your phone spies on you? This example program distributed with BRexx shows how easy it is to track your location:

```
call import "android.r"
call AndroidInit
say "Finding ZIP code."
location = getLastKnownLocation()
say location
loc = json(location, "gps")
say "GPS=" loc
if loc="null" then do
   loc = json(location, "network")
   say "Network=" loc
if loc="null" then do
   say "Unable to find location"
   exit
end
lon =
Lon = json(loc,"longitude")
lat = json(loc,"latitude")
say "Lon=" lon
say "Lon=" lat
addr = geocode(lat, lon)
say "Addr=" addr
zip = json(addr,"postal code")
say "Zip=" zip
```

The getLastKnownLocation function estimates where you are. Then json swings into action with geographical positioning (gps) and eventually finds your longitude and latitude. This ultimately allows the program to display your network location, longitude, latitude, and your postal or "zip" code.

Of course, if you want to precisely and accurately pinpoint someone's location, there's a bit more to it than just this. But this simple program gives you a good idea of just how easy this is to program in a high-level scripting language.


Bluetooth Example

For the final example, we'll see how to implement Bluetooth communications between two Android cell phones. Bluetooth is a short-range wireless communications protocol that can be used to exchange data between devices.

These two programs were written by Eva Gerger. The screen shots below are from her presentation on her code at the Rexx Language Association annual symposium.

The "server" script must be started prior to running the "client" script.

These photos show their interaction. The server starts up and asks for connection permission. The user sends a message to the client: "Hello, over there!". As you can see, the client receives that message:

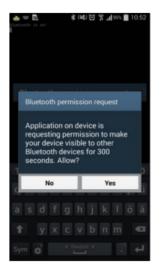





Bluetooth Server is Ready



Bluetooth Client Receives the Message

Bluetooth Server Sends a Message

Here is the server program:

```
/* Server */
call import "android.r"
call AndroidInit
call toggleBluetoothState true
say "bluetooth is on!"
call bluetoothMakeDiscoverable 300
say "now discoverable"
call bluetoothAccept "457807c0-4897-11df-9879-0800200c9a66", 0
```

```
say "connected!"
message = dialogGetInput("Your Message","Please enter message:")
call bluetoothWrite message
call sleep 10
```

The calls to toggleBluetoothState and bluetoothMakeDiscoverable enable Bluetooth and make this device discoverable.

The bluetoothAccept function looks for a Bluetooth connection. Note that the client has to use the same identity number as given in this call.

Then the dialogGetInput call prompts the user to enter his message. The bluetoothWrite message call sends it to the connected client.

Here is the client program:

```
/* Client */
call import "android.r"
call AndroidInit
call toggleBluetoothState true
a = bluetoothConnect("457807c0-4897-11df-9879-0800200c9a66")
say a
call sleep 5
a = bluetoothRead(4096)
say a
pull .
```

After initialization, just as in the server program, the toggleBluetoothState and bluetoothConnect calls enable Bluetooth and look for a connection matching the specified ID.

The bluetoothRead function accepts data through the live connection, and the say statement displays it on the client device.

Rexx for Android (aka Rexxoid)

Another scripting option is called "Rexx for Android," or Rexxoid. Rexxoid was developed by Pierre G. Richard of Jaxo, Inc., sometimes referred to as Jaxo Systems.

Rexxoid is based on Mr Richard's C++ Rexx library. This code runs on most platforms, and was initially deployed on Palm OS. Richard updated it to Android and today it offers a way to code Rexx scripts that issue Android shell commands.

You can download and install Rexxoid from the Google Play Store. In its GitHub home, at https://github.com/Jaxo/yaxx, you'll find a half dozen sample programs as well as screen shots of the product in action.

As is standard for Android apps, Rexxoid has a Manifest file that enumerates its permissions. If you encounter any errors requiring further permissions, this is where you can add them.

When doing such work, it may be helpful to connect the phone to a laptop or desktop computer via USB cable. This also facilitates debugging.

Rexxoid has a fundamentally different design than BRexx for Android. While BRexx uses the SL4A scripting interface, Rexxoid is primarily intended to issue shell commands. From this perspective, its functionality is a bit more limited.

Example Scripts

Here are a few code examples from a Rexx Language Association symposium presentation by Julian Reindorf using Rexxoid. The code is all by Mr Reindorf. Some lines wrap around due to screen wrap and typesetting restrictions, so we've included line numbers for clarity:

Opening the browser:

```
1 SAY "Which url would you like to visit?"
2 PARSE PULL url
3 "am start -a android.intent.action.VIEW --user 0 -d http:" || url
```

Using the speaker:

```
1 CALL CHAROUT "Speaker:lang=en", "I am the voice of Rexxoid"
2 CALL CHAROUT "Speaker:lang=de", "Und ich kann auch andere Sprachen"
3 CALL CHAROUT "Speaker:lang=fr", "Au revoir"
```

Creating emails:

```
1 text = ""
2 DO i=1 TO 100
3    text = text i
4 END
5 "am start -a android.intent.action.SEND --user 0 -t 'text/plain' -e to 'john.doe@gmail.com' -e android.intent.extra.SUBJECT '1 to 100!' -e android.intent.extra.TEXT '"text"'"
```

Opening Google Maps:

```
1 SAY "What do you want to see?"
2 input = LINEIN()
3 location=""
4 DO WHILE LENGTH(input) > 0
5    PARSE VAR input char +1 input
6    location=location|| "%"||C2X(char)
7 END
8 "am start -a android.intent.action.VIEW --user 0 -d 'geo:0,0?q="location"'"
```

Setting alerts:

```
1 SAY "*Alert Creation*"
2 SAY "Hour?"
3 PULL hour
4 SAY "Minute?"
5 PULL minute
6 SAY "Message?"
7 PULL message
8 "am start -a android.intent.action.SET_ALARM --user 0 --ei android.intent.extra.alarm.HOUR " hour " --ei android.intent.extra.alarm.MINUTES " minute " -e android.intent.extra.alarm.MESSAGE '" message "' --ez android.intent.extra.alarm.VIBRATE false --ez android.intent.extra.alarm.SKIP_UI true"
9 SAY "Done!"
```

Sending key events:

```
1 DO 5
2 "input keyevent 24"
3 "sleep 0.6"
4 END
5 DO 5
6 "input keyevent 25"
7 "sleep 0.6"
8 END
```

ooRexx for Android

A third option for programming your Android with Rexx is to use ooRexx. "ooRexx for Android" brings the full benefits of Open Object Rexx to the Android. It was ported to Android by Thomas Grundmann-Kahr of Germany. It is offered under the Apache 2.0 open source license.

The product home is at GitHubt at https://github.com/itsmetjk/ooRexx5_for_AndroidOS. From there, you can download the interpreter and access all its documentation. The software includes an Android Package Kit (APK) for easy installation.

At the time of writing, scripts can only be run on a rooted device. They also require the Android Software Development Kit (SDK). You may have to update the Manifests file to get them working.

Example Scripts

All example programs were written by Mr Grundmann-Kahr. Note that a few lines wrap around due to typesetting limitations. We have reproduced them without introducing any characters indicating line wrapping.

First up, a simple script to display memory usage. This shows how you send commands to Android via the ADDRESS SYSTEM instruction:

```
SAY "View Memory Info"

/* Retrieve Memory Info*/
ADDRESS SYSTEM "free -h"
ADDRESS SYSTEM "df -h"

SAY "Memory status retrieved."
```

Say hello to your friends in Germany with an email (and impress them with your fluent German!):

```
/* Einfacher Befehl zum Versenden einer E-Mail */
mailCommand = "am start -a android.intent.action.SENDTO -d mailto: thomas@gruka.at
--es android.intent.extra.SUBJECT 'ooRexx' --es android.intent.extra.TEXT 'Test'"

ADDRESS SYSTEM mailCommand
SAY "E-Mail Erstellung gestartet."
```

Here's how browse the web:

This last example shows how to create an alert. (Note that typesetting wrapped around the line containing the am command):

```
SAY "*Alert Creation*"
SAY "Hour?"
PULL hour
SAY "Minute?"
PULL minute
SAY "Message?"
PULL message

"am start -a android.intent.action.SET_ALARM --user 0 --ei android.intent.extra.alarm.HOUR
" hour " --ei android.intent.extra.alarm.MINUTES " minute " -e
android.intent.extra.alarm.MESSAGE '" message "' --ez android.intent.extra.alarm.VIBRATE
false --ez android.intent.extra.alarm.SKIP_UI true"

SAY "Done!"
```

Rexx on Apple

What about running Rexx on Apple products like the iPhone and iPad? Regina Rexx runs under the **iSH** app, downloadable from Apple's App Store. iSH runs a Linux shell environment locally on your iOS device, using a usermode x86 emulator. You would download Regina's 32-bit Alpine Linux package for this purpose.

Summary

Rexx has long run on a wide variety of cell phone, tablet, and specialty handheld operating systems.

In this chapter we looked specifically at three Rexx interpreters for Android. BRexx, Rexxoid, and ooRexx for Android are the current offerings. All three are free and open source. We presented several programming examples with each to show what you can do with them, and how you would code.

If you use Rexx on any other platform, your knowledge of the language transfers to the Android without change. All you have to learn are Android-specific behaviors, calls, functions, and the like.

Test Your Understanding

- **1.** What's the function of SL4A? What does it offer?
- **2.** Which of the three interpreters in this chapter require SL4A?
- 3. If your Rexx interpreter has a permissions problem, what do you change to fix it?
- **4.** Do you need to root your Android device to run Rexx?
- **5.** What should be the normal environmental target (or operand) for the ADDRESS instruction?
- **6.** How does the bluetoothConnect function know which device to contact?

r4 and Object-Oriented roo!

Overview

Kilowatt Software offers two free Rexx interpreters. r4 is a classic Rexx interpreter that meets the TRL-2 standard and is at language level 4.00. roo! is an object-oriented superset of r4. It offers a complete object-oriented Rexx programming language. Both r4 and roo! run under all versions of Windows and are complemented by many add-on tools for the Windows environment. This chapter briefly overviews both.

We'll discuss the advantages to r4 and roo! as a pair of Rexx interpreters from the same company. After telling where to download and install the product, we'll describe some of the tools that Kilowatt Software provides for both r4 and roo! These help developers leverage Windows features with much less effort than would otherwise be required.

The heart of the chapter is the quick overview of roo!'s object-oriented scripting features. Object-oriented programming is an approach many feel dramatically raises developer productivity. roo! supports all object-oriented features, while retaining full compatibility with standard Rexx. We'll describe the additions roo! makes to classic Rexx and explain how they support object-based scripting.

Before we start, an important note: Kilowatt Software took down their website and the company appears to have gone out of business. This leaves their Rexx products unsupported. This chapter discusses r4 and roo! as per their last available documentation. Such material may be outdated for current Windows programming.

Advantages

r4 and roo! are two different products from the same vendor. Nevertheless, they share many of the same tools and characteristics. Here are some key features of r4 and roo!:

Windows-oriented The products are customized for Windows, with easy installation and developer tools specifically designed for Windows. Roo! Is a free object-oriented Rexx that is tailored and configured for Windows.
<i>Introductory material</i> The products feature several tutorials and presentations on classic Rexx and roo! The r4 and roo! Documentation is easy to read and informal. Beginners can learn the languages quickly, while experienced developers become immediately productive.
$Sample\ scripts - r4$ and roo! each ship with about 50 sample scripts. The examples perform useful, real-world tasks such as HTML processing, managing sockets, processing comma-separated value (CSV) files, statistical functions, file conversions, and the like. These scripts can be used as models or a starting point for your own.
<i>Upward Compatibility</i> — The products were developed by the same company, so the object-oriented roo! is fully upward compatible with the classic procedural r4.
$\mathit{Tools}-\mathrm{r4}$ and roo! come with a number of useful developer utilities. We describe them later.
Windows GUI development — Windows GUI tools often include hundreds of functions and dozens of widgets with hundreds of attributes. This provides flexibility but confronts developers with a steep learning curve. For beginners it can be downright bewildering. Kilowatt Software offers a smaller, more focused tool set that makes Windows GUI development a snap.
Object-oriented migration — r4 is 100 percent upwardly compatible with the object-oriented roo! You can ease into object-oriented programming with roo! while maintaining backward compatibility with your existing classic Rexx scripts. Whether the legacy scripts were written for r4 or any other classic Rexx interpreter, as long as they stay within the Rexx standards, they will run under roo!
The OOP alternative — roo! presents an object-oriented Rexx alternative to the Open Object Rexx interpreter (developed by IBM Corporation and today enhanced and maintained by the Rexx Language Association). roo! features completely different design and class libraries. Windows developers have a choice of two different object-oriented Rexx interpreters for their platform.

Downloading and Installation

r4 and roo! run under all versions of Windows, but no other operating systems. They require two separate downloads and installs. They can be freely downloaded from any of several websites including www.RexxInfo.org and www.manmrk.net. The documentation that comes with the products tells how to install and configure them.

Verification

Verify that the install succeeded by running a few of the sample scripts in the product directory. For starters, run the scripts from the Windows command line. Just change to the product directory and enter the interpreter followed by the script name:

```
c:\r4> r4 lottery.rex <= Runs the r4 program: lottery.rex

or
c:\roo> roo blueMoonGenie <= Runs the roo! program: blueMoonGenie.rooProgram</pre>
```

Environmental variables can be set to customize program execution. All are described in the product documentation. You will also want to add the r4 and roo! installation directories to your PATH variable.

Documentation

After installation, read the readme.txt file. This contains the licensing terms. r4 and roo! are free for both personal use and corporate customers and come with a limited warranty.

A number of *.htm files in the product directories contain the documentation. Just double-click on any file to read it. The r4 documentation includes these two key documents:

Document	File
User's Guide	r4.htm
Syntax Summary	r4SyntaxSummary.htm

roo! documentation includes these major files:

Document	File
User's Guide	roo.htm
Syntax Summary	rooSyntaxSummary.htm
Language Specification	rooLang.htm
Scripting Examples	rooExamples.htm

There are also *.htm files that describe each of the tools. For example, to learn about some of the GUI accessories, just click on any of the files FileDlg.htm, msgbox.htm, prompt.htm, or picklist.htm. Each contains an explanation of the associated command and a complete sample script. Any of the add-in tools you install, such as AuroraWare!, Poof!, and Revu follow the same approach. An *.htm file explains each command. Let's discuss these tools now.

Tools

Kilowatt Software supplies a full set of Windows-oriented tools to complement r4 and roo! Figure 26-1 pictorially summarizes them.

R4 and roo! Tools

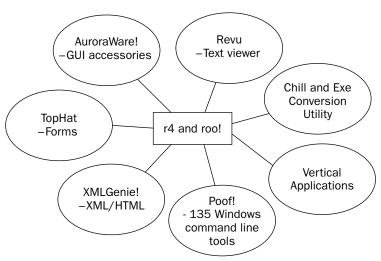


Figure 26-1

Let's describe the tools in more detail.

- ☐ *AuroraWare!* This is a tool set of GUI accessories. Here are its components:
 - ☐ CheckList Visual checklist management facility
 - □ Counter A timer for activity, ticking clock, or count down
 - ☐ Ticker Time-keeping accessory
 - ☐ TopClick—Action buttons
 - □ TopClip Text-clipping management accessory
 - ☐ TopCue Scrolling marquee accessory
 - ☐ TopList Drop-down lists
 - □ TopNote Note-editing accessory
 - □ TopSort Clipboard text sorting
 - □ VuHtml HTML-file-viewing accessory

<i>TopHat</i> — A fill-in-the-blanks form accessory. Presents a tabbed GUI panel for data display, entry, and update. Related GUI tools include:			
	FileDlg—File selection dialog		
	MsgBox — Message boxes		
	Prompt — Prompts for user responses		
	PickList — Selection lists		
mer dev	se GUI tools are more readily learned than more comprehensive but complex GUI develop at tools. They transfer the Rexx ease-of-use philosophy to the world of Windows GUI elopment. If an advanced GUI interface is required, roo! and Java can used together to te it.		
XM.	LGenie! — A utility that automatically converts XML to HTML.		
	!—This provides more than 135 Windows command-line tools. Some of the areas they er include:		
	Batch-scripting aids		
	Binary file utilities		
	Clipboard utilities		
	Command launching		
	Task control		
	File management (for many different file formats)		
	HTML preparation		
	Mathematical and conversion routines		
	Software development		
	File aids		
	Many miscellaneous utilities		
<i>Revu</i> — Colorful text viewer. Highlights text appropriately for different programming languages.			
<i>Chill</i> — This utility converts an r4 or roo! program into an unreadable, closed-source file. This allows you to give others the use of your scripts without exposing the source code.			
$\it EXE\ Conversion\ Utility\$ This converts scripts to stand-alone Windows executables, *.exe files.			
CFL	OW—C/C++ flow analyzer.		
Vertical applications — Kilowatt software also ships several vertical applications for the educational sector and for Java development.			

Object-Oriented Programming with roo!

roo! is derived from the first letters of the words *Rexx Object-Oriented*. It is a complete object-oriented interpreter. It presents a free alternative to Open Object Rexx for Windows. This section lists the basic elements of object-oriented programming (or OOP) in roo!

roo! supports all object-oriented concepts:

- Classes and methods
- ☐ Inheritance and derivation
- Encapsulation
- Abstraction
- Polymorphism

Classes and methods give roo! complete object orientation. It is through these that the language provides a class hierarchy, inheritance of behaviors and code and attributes, and the ability to derive new objects from existing ones. Encapsulation means that any interaction between objects is well defined. Data owned by one object, for example, is hidden from others. Communication between objects occurs only through messages, because an object's data and logic (or methods) are encapsulated together. Object orientation also provides abstraction, the ability to define programming problems through the higher-level paradigm of interacting objects. Finally, roo! supports polymorphism, the ability for operators to apply as appropriate to the kind of data and messages involved. Figure 26-2 summarizes how these new concepts expand classic Rexx into the realm of full object orientation.

Object-Oriented Rexx Means...

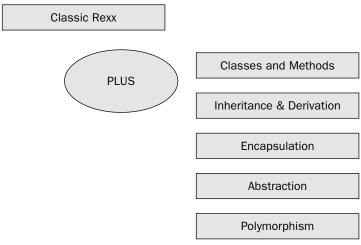


Figure 26-2

If you are not familiar with object-oriented programming, we introduce it in the tutorial on object-oriented Rexx programming in Chapter 28. That chapter uses Open Object Rexx as a basis for explanation.

For those who are familiar with object programming and terminology, let's describe how roo! achieves object orientation. To start with, roo! extends classic Rexx with a set of object-oriented features. Figure 26-3 expresses how roo! extends classic Rexx into the world of object orientation.

roo! Adds to Classic Rexx...

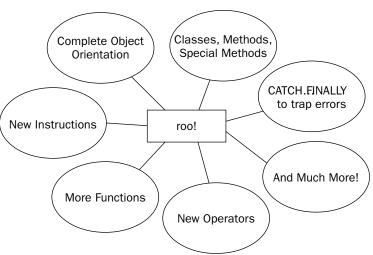


Figure 26-3

Here is a quick summary of these object-oriented features:

- class and method instructions
- ☐ Class variables are defined as local, shared, or static
- ☐ Built-in class library
- ☐ Special methods preinitialize, initialize, finalize, and terminate
- ☐ self and base references
- ☐ New operators:
 - □ ^^ (*double caret*) Instance creation
 - □ ^ (*caret*) Method invocation prefix operator
 - □ ~ (*tilde*) Method invocation infix operator
 - ☐ [] (brackets) Arraylike reference operator

Chapter 26

		{ } (braces) — Vector class reference	
		! (exclamation) — Identifies a command	
	The	new error condition OBJECTION traps when the initialize method returns an error string.	
	Instance keyword for the datatype built-in function performs actions only on properly created object instances. This enables error-checking.		
	The	trace is extended to objects.	
	Nev	v built-in functions:	
		callback — Transfers control to a callback routine under certain conditions	
		nap — A sleep or wait function	
		raiseObjection — Raises the OBJECTION condition	
		split — Splits a delimited string into a vector	
		squareRoot — Returns the square root of a number	
	☐ Adds stack commands makebuf, dropbuf, newstack, and delstack for compatibility with other Rexx implementations		
	A roo.dll module allows using roo! capabilities from C and C++, while <i>Java Native Interface</i> or <i>JINI</i> provides Java integration.		
roo! als		udes several extensions based on NetRexx (which is described in chapter 30), the ANSI-1996 d Java:	
	Con	nments on a line may start after a double-hyphen ().	
	Nev	v built-in functions:	
		changestr — Replaces all substrings within a string (ANSI-1996 standard)	
		counstr — Counts how many times a substring occurs (ANSI-1996 standard)	
		exists—Returns 1 if a compound variable has a value	
		lower — Converts a string to lowercase	
		upper — Converts a string to uppercase	
	Java	-like catch finally instructions capture exceptions in do and select instructions.	
	100	over instruction processes all elements of objects or compound stem groups.	

From this list, you can see that roo! adds the key elements required for object orientation. These are the class library, with the means to code classes and methods, the new operators for OOP, the special methods, and reference objects. Most of the other language additions extend roo! to cover the kind of extensions found in other Rexx interpreters. These include, for example, the new built-in functions, better exception handling, and the like. roo! offers a nice combination of object orientation plus key convenience features to round out the toolset.

The power of roo! resides in its extensive class library. In the world of object-oriented programming, the bigger and more powerful the class library, the easier scripting becomes. More classes and methods directly translate into less work for the developer.

Of course, each class has its own group of built-in methods appropriate to the class. The methods are too extensive to list, but you'll get an idea of their range from this alphabetical class list. Skim the class list and you'll understand the power of classes and what roo! has to offer:

Class	Use
Aggregate	Collection base class
BitVector	Vector of Boolean values
Callback	Callback class associated with external programs
CharacterVector	Vector of character values
Clipboard	Clipboard text
Comparator	Compares items
Console	The console stream
ContextVector	System call vector access class
DriveContext	Disk drive reference context
Emitter	Output stream emitter
Exception	Exception information caught by catch routines
ExternalClass	Class supported by external program
File	File information
FolderContext	Directory reference context
InLineFile	Line-oriented input file
InOutLineFile	Line-oriented update file
InStream	Standard input (default input stream)
List	Collection of heterogeneous items
Map	Collection of heterogeneous items indexed by strings
Math	Higher math functions
Object	Object base class
OrderedVector	Collection of ordered items (nonunique values)
OutLineFile	Line-oriented output file
OutStream	Standard output (default output stream)
Pattern	Regular expression pattern

Table continued on following page

Chapter 26

Class	Use
PatternMatch	Matching regular expressions
Queue	Collection of heterogeneous items accessed at start or end
Set	Collection of ordered, unique items
Socket	TCP/IP socket class
Stack	Collection of heterogeneous items accessed at the end
System	System information
SystemPropertyMap	Collection of system properties (environmental variables) indexed by string values
Table	Table of rows and columns
Tree	Hierarchical tree object
Vector	Collection of heterogeneous items
WideCharacterVector	Vector of 2-byte wide characters

Learning roo! means learning the class hierarchy and their associated methods. Leveraging this built-in power reduces the code you write because it utilizes the object-oriented tools. This is the power of an object-oriented Rexx interpreter. The product documentation and sample scripts provide the information you need to build your knowledge as you go. The roo! tutorials are especially designed to help classic Rexx programmers transition to object-oriented scripting in an easy manner.

Summary

r4 and roo! are free Rexx interpreters from Kilowatt Software. Both are Windows-based products that conform to the TRL-2 language standards. This chapter discusses some of the unique features of these products beyond the language standards, concentrating especially on roo! and its unique object orientation. roo! is a powerful free object-oriented Rexx for Windows systems that offers an alternative to Open Object Rexx.

The specific features we covered in this chapter included the strengths of r4 and roo! as Rexx interpreters, how to download and install them, and where to find the product documentation. We then described the toolset that works with both the interpreters and is also freely downloadable. After briefly discussing the basic characteristics of object-oriented programming, we listed and describe the major object-oriented features of roo!. The idea was to give experienced object-oriented programmers a quick summary of roo!'s object features.

The next chapter introduces Open Object Rexx, another object-oriented Rexx interpreter. Chapter 28 provides a full tutorial on object-oriented scripting. It leverages your knowledge of standard Rexx scripting to introduce object-oriented programming through program examples.

Test Your Understanding

- **1.** What are some of the advantages of the r4/roo! package? Name some of the tools that come with these interpreters.
- **2.** Can r4 scripts be run under roo!? Can roo! scripts run under r4? Are r4 scripts portable? Are roo! scripts?
- **3.** Which r4/roo! tools would you use to develop Windows GUIs? How do the r4/roo! GUI tools differ from those discussed in the chapter on "Graphical User Interfaces (such as Rexx/Tk and Rexx/DW)? Compare the r4/roo! GUI tools to Rexx/Tk and Rexx/DW. Which best satisfies each of these differing criteria:

Best customization for Windows
Most portable
Easiest to use
Most powerful (has the most widgets, attributes and functions)
Can be learned most quickly
Is most easily maintained by a programmer other than the one who wrote the script
there trade-offs among these criteria? Does their relative importance vary in different promming projects?

- **4.** How does the installation of r4 and roo! differ from that of other Rexx interpreters?
- **5.** What principles of object-oriented programming does roo! support?
- **6.** Name the new operators that roo! introduces to support object-oriented programming. What is the function of each?
- **7.** Which roo! built-in classes would you use for line-oriented file I/O? Which would you use for screen I/O? Which would you use for TCP/IP sockets for client/server?

Open Object Rexx

Overview

Standard Rexx is a procedural language. In contrast, Open Object Rexx is a fully object-oriented superset of standard Rexx. With very minor exceptions, every Rexx script will run under Open Object Rexx without change. This means that all you have learned about Rexx applies directly to Open Object Rexx, or "ooRexx".

ooRexx provides easy entry into the world of object-oriented programming, or OOP. The key benefit is that Rexx is an easy language to learn and grow with, and ooRexx retains these advantages while supporting object-oriented scripting.

Since standard or "classic" Rexx scripts typically run under Open Object Rexx without any changes, ooRexx makes it easy to migrate to object-oriented programming while preserving investment in traditional Rexx code. Existing code can run as is, while new code is added to take advantage of object-oriented features. Developers may still code in classic, procedural Rexx while adding object-oriented features at any rate they find desirable.

In contrast to other object-oriented languages, such as C++ or Java, Open Object Rexx emphasizes Rexx's traditional strengths in simple syntax and ease of use. Yet it combines them with power. If you have experience in other object-oriented languages, you may be interested to see how ooRexx compares.

Leveraging ooRexx means using its object-oriented features. The next chapter presents a tutorial on object-oriented scripting using ooRexx. The tutorial assumes no background in object-oriented programming, so if you don't know OOP, this lesson will start you writing your own object-oriented scripts. The goal is to leverage your knowledge of classic Rexx to launch you into object-oriented scripting.

Origins

IBM developed a product they named *Object REXX* in the mid-1990s. They offered this interpreter for the Windows, Linux, Unix, and OS/2 platforms. In 2005, IBM open-sourced the product and gave it to the non-profit Rexx Language Association. The "RexxLA" has developed, supported, and maintained it ever since.

The official product name is *Open Object Rexx*, but it's nearly always referred to by its shorter moniker, *ooRexx*. The RexxLA website is www.RexxLA.org, while the ooRexx website is at www.ooRexx.org. ooRexx runs on Windows, Linux, Unix, BSD, and macOS. It is free and open source software.

Features


,	s include:		
	Greater code reuse		
	Greater quality assurance and a lower error rate through reusing proven components		
	Lower cost and maintenance by leveraging existing objects		
	Applications can be designed by modeling objects and their interactions		
	Rapid prototyping and development		
Open C	Object Rexx completely extends Rexx into OOP. It has all possible OOP features including:		
	Objects, classes, subclasses and superclasses, meta classes, mixin classes, public and private methods		
	Comprehensive class libraries		
	Inheritance		
	Multiple inheritance		
	Encapsulation		
	Polymorphism		
	Method chaining		
	Online reference facility		
	Interfaces to a incredibly wide range of tools. These include those distributed with ooRexx itself, as well Rexx tools available elsewhere. An example are the essential developer tools available at www.Rexx.org.		

Open Object Rexx can be used in place of shell scripts. The advantages to ooRexx scripting include:

- ☐ Ease of use and high productivity
- ☐ A complete set of OO features
- ☐ Upwardly compatible with classic procedural Rexx
- ☐ Portability
- ☐ Features like concurrency, inter-process communication, and all data structures
- ☐ Extra utilities and interfaces (including OS-specific tools for Windows, Linux, and Unix)

Figure 27-1 summarizes some of the major features of Open Object Rexx that go beyond the Rexx standards and classic Rexx interpreters. It shows that ooRexx is a superset of classic Rexx that adds many new features.

Open Object Rexx Adds to Classic Rexx . . .

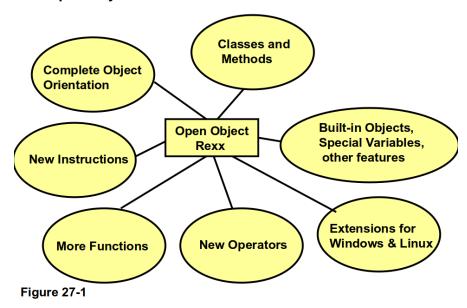

Installing ooRexx

You can freely download ooRexx from its permanent project library at SourceForge at https://sourceforge.net/projects/oorexx/files/oorexx/.

You'll find ooRexx there as well as a number of tools and interfaces for it. Once you access the **Files** panel to download the latest release of ooRexx, you'll see ready-to-install packages for Windows, Linux, BSD, and the macOS. These include Windows self-extracting .exe files, Linux packages in popular formats such as .deb and .rpm, and .dmg files for macOS. For BSD you'll find compressed archive files.

The easiest way to install ooRexx is simply to pick the package that matches your operating system and its modality (either 64 or 32 bit), download it, and double-click on it to start your installer.

First, however, be sure to read any background information contained in the **INSTALL** and **ReadMe.txt** files. The **CHANGES.txt** and **ReleaseNotes** may also be useful prior to installing.

Windows

By default, the product installs into a new directory: C:\Program Files\ooRexx. Also by default, the install creates Windows file associations and uses the file extension .rex for ooRexx scripts. (The example scripts in this book follow the alternative convention of using the file extension .orex for ooRexx.)

You can also set some defaults on how Windows treats an ooRexx script when you double-click on it to run it. For example, **rexxpause** allows you to click on a script to run it, and then automatically pauses so that you can see its output in a command window.

We recommend checking the box to place an ooRexx icon on your desktop. This folder gives easy access to all ooRexx resources.

After the install, the entry **Open Object Rexx** will appear in your Windows Program List. Find it and click on the ooRexx **Samples** entry to run a sample program to verify your install.

Finally, developers often ask if installing ooRexx on a Windows computer that already has Regina Rexx installed causes any conflicts or problems. We can't speak to all releases or their combinations, but the author has never experienced difficulty in co-residing the two products on various computers. Windows keeps the two apart and distinguishes them by using different install directories, file associations, and the like.

Linux

After downloading the package file that matches your distribution and package manager, simply double-click to install ooRexx.

The directories ooRexx uses depend on your platform and its release. For the current Ubuntu download, ooRexx places its binary executable rexx into directory /usr/local/bin. Example programs have file name extension of .rex and are placed under the directory /usr/local/share/ooRexx.

This means that no conflicts result for a computer that already has Regina installed. Just run ooRexx via the rexx command and Regina via its regina command:

```
rexx -v /* runs ooRexx */
regina -v /* runs Regina */
```

Or code the first line of your scripts to invoke the correct interpreter. For example, code this first line to run the script under ooRexx:

```
#!/usr/local/bin/rexx
```

Code this line to run the script under Regina Rexx:

```
#!/usr/bin/rexx
```

These locations do vary by the release of your download, so be sure to check your filesystem after installing ooRexx so that you know exactly where it places its executables, demo examples, and documentation on your system.

The Basics

The next chapter presents a complete tutorial on Open Object Rexx scripting. Here we discuss some of the basics to show how the language supports object-oriented programming. We define classes, methods, messages, attributes, abstract classes, instance classes, public and private methods, directives, and other object-oriented terms. We'll present brief code snippets to make these terms clear.

If you follow this chapter, but do not know how to use these concepts in developing object-oriented scripts, don't worry. That is the purpose of the next chapter, Chapter 28. That chapter provides a full, step-by-step tutorial on how to write object-oriented scripts. Here the idea is just to introduce a few key object-oriented concepts and to show how Open Object Rexx implements these concepts in code.

Rexx *objects* contain *methods* and *variables*. Variables are more accurately called *attributes*. Object methods are actions that are invoked by sending a message to the object. Rexx uses the tilde operator (~) to send the message to the object and run its method.

For example, in classic Rexx, you might "check in" a library book by coding a function called <code>check_in</code>. Then invoke the function like this:

```
feedback = check in(book) /* run user-defined CHECK IN function */
```

In Open Object Rexx, send a message to the object book to run its check in method:

Rexx runs the method that matches the message name following the *tilde* or *twiddle*. Note that the method is encoded to the right of the object to which it applies. Thus the ordering of <code>object~method</code> varies from the traditional ordering of <code>function(parameter)</code>.

Object variables or attributes are exclusively owned by the object. Attributes are *encapsulated* in that they are not visible or accessible by other objects and their methods; only the object's methods can change its variables. Each method in the object specifies which variables it accesses by coding them on its <code>expose</code> instruction. Any changes a method makes to an exposed variables remains after the method terminates.

Objects are created by the new method. For example, to create a new book in the library system:

```
new book = .book~new
```

The new method creates the object and automatically invokes the init method (if it is defined) to initialize object variables from parameters and defaults. Here's an example that adds a newly acquired book to the library and sets some attribute values:

```
new book = .book~new('The Third Reich','MacMillan Publishing',1970)
```

The *parameters* for a method immediately follow the name of the method and are enclosed in parentheses. The preceding statement encodes three parameters inside of the parentheses for the method.

To later delete the book permanently from the library system, use the <code>drop</code> instruction. This instruction needs only a single operand, the name of the object instance to delete:

```
drop new book
```

A group of related objects compose a *class*. An individual object created from the class, such as the book referred to earlier, is called an *instance* or *instantiation* of that class.

To identify classes and methods in Open Object Rexx code, use *directives*. Directives are denoted by leading double colons (::). This example creates the book class and methods to check books in, check them out, and initialize a new book instance. The class and each of its methods are denoted by the appropriate directive:

This example also shows how the new expose instruction makes attributes available to a method that can change them. If the method alters any values listed in the expose instruction, these new values persist even after the return or exit from the method. So, the check_out method shown here can change the three arguments listed in its expose instruction. If an expose instruction is coded, it must appear as the first instruction in the method.

The new use arg instruction shown here retrieves the argument objects passed in to the method. It differs from the arg and parse arg instructions in that it allows nonstring arguments. The use arg instruction performs a direct, one-to-one assignment of arguments to variables. So, the init method in the example accesses three arguments through its use arg instruction.

Methods may be either *public* or *private*. Those that may be invoked from the main program or other classes are public. Those available only to the methods within the class are private. By default, methods are public. Use the keyword private to define a private method. In the example that follows, the method replacement_cost can only be invoked by other methods in the book class. The method can access and update any of the three attributes listed on its expose instruction. As shown here, it updates the replacement_amount value:

Methods can be invoked by either of two operators: the tilde (\sim) or the double tilde (\sim). Using \sim returns the result of the method, while using \sim returns the object that received the message. Most situations call for returning the result of the method, so the tilde (\sim) appears more commonly in code.

Several methods may be applied to an object, one after another, by a technique referred to as *method chaining*. This example applies two methods to the book object, with the check_out method returning the result:

```
book~~loan out~check out
```

Open Object Rexx supports several kinds of methods. *Instance methods* perform an action on a specific object or instance of a class. They handle the data of a specific object. *Class methods* are more global. They apply to the class as a whole. For example, class methods might count the number of objects in the class or manage all the objects together as a collection.

Classes are organized into *class hierarchies*. These describe inheritance relationships in a hierarchical manner. A *subclass* inherits all the attributes and methods of its *parent class* or *superclass*. As well, the subclass adds its own attributes and methods as needed. For example, hardback_book and paperback_book could be subclasses to the book class. Each inherits all the behaviors of the book class (defined by its attributes and methods) but adds additional behaviors as well:

An abstract class is one for which you would not normally create instances, but whose definition could be useful to define common generic behavior. For example, along with the book class there might also be a magazine class. Both could be subclasses of the abstract class library_resource. This superclass might include some generic behavior common to any library resource, be it a book, magazine, video, or whatever. It is an abstract class that we choose never to create an instance of, as we only use it as a superclass to define some behaviors for its subclasses:

Some object-oriented languages only allow subclasses to inherit attributes and methods from a single superclass or parent class. Open Object Rexx permits *multiple inheritance*. An object can inherit from both its direct parent and also from other classes called *mixin classes*. Instances are not generated from mixin classes. Instead mixin classes are just containers of attributes and methods that subclasses can inherit.

A subclass can inherit behaviors both from its single parent class and from one or more mixin classes.

In this example, the book class inherits variables and methods from both its abstract parent class library_resource and the mixin class named printed_resources:

Open Object Rexx supports *polymorphism*, the ability to send the same message to different kinds of objects and invoke the appropriate method in each. For example, the library might require different actions to check out reference books as opposed to regular books:

```
book~check_out
reference book~check out
```

In each case, Open Object Rexx runs the different <code>check_out method</code> appropriate to the object to which it is applied.

Rexx objects interact *concurrently*. Multiple objects may be active at any one time, sending messages and executing methods. It is also possible to permit concurrency *within an object* when that makes sense to the application. In this situation multiple methods within an object run at the same time. An example script in the next chapter shows how to implement concurrency.

The Class Libraries

Just as the power of a procedural language correlates to its set of functions, the power of an objectoriented language rests on the strengths of its *class libraries*. A class library is simply a set of predefined or built-in classes. As we saw in the above examples, each class may contain functions or *methods* as well as related data variables. A class has two main components: methods and variables.

How much work developers must perform to create their applications varies inversely to the size and power of the class libraries: the more extensive the class libraries that come with the product, the less work developers must do. ooRexx's class libraries are quite comprehensive, designed to support high developer productivity.

At last count, ooRexx had some 50-odd classes. That's too many to list here, so see Appendix I for the complete list.

Classes arrange into a class hierarchy. This design supports one of the biggest benefits of object-oriented programming, the inheritance of capabilities by *subclasses* form their *parent* or *super* class(es).

For example, ooRexx's Array class offers nearly three dozen methods that help you manipulate arrays. In addition, it inherits several dozen methods from the three classes to which it is a subclass: the Object class, the Collection class, and the OrderedCollection class.

ooRexx's classes categorize into four broad sets:

Class	Use
The Fundamental Classes	These classes provide the basis of the class hierarchy. They include Object,
	Class, String, Method, Routine, Package, and Message classes.
The Stream Classes	These classes provide for I/O. They include the InputStream, OutputStream,
	InputOutputStream, and Stream classes.
The Collection Classes	A collection is any group of items that can be processed in like manner. These
	classes form the basis for data structures like arrays, lists, queues, sets, and
	more.
The Utility Classes	This largest category includes a couple dozen classes that provide time and
	monitoring services, implement comparisons, support regular expressions,
	manage pointers and buffers, and more.

Other ooRexx Additions vs. Classic Rexx

Beyond its full set of object facilities, Open Object Rexx makes other additions to standard or "classic" Rexx. We describe them in this section. Figure 27-1 diagrammatically illustrated these differences. The next chapter, Chapter 28, discusses examples of scripts that show how to use many of these new language features. Read that chapter for a tutorial explanation of how to use ooRexx classes and methods. The goal here is to summarize the language features that extend ooRexx beyond the realm of classic Rexx. These brief descriptions also allow you to compare Open Object Rexx to any other object-oriented programming language with which you may be familiar.

New Operators

ooRexx retains all the operators in classic Rexx, and adds many new ones. The first two listed below allow scripts to send a message to an object, thereby running the method associated with the message name. The difference between the two operators is in what is returned. The tilde returns a method result, while the double-tilde returns the object of the message. The brackets operator allows easy reference to objects within a collection. Brackets can be used in place of the formal message descriptors to add or retrieve an object to or from a collection. This table lists these new operators and their meanings:

Operator	Use
~	Send a message to invoke a method and return its result
~~	Send a message to invoke a method, return the object of the
	message
[]	Add or retrieve objects to/from a collection
+=, -=, *= /=, %=, //=, =, &=, =,	Extended assignment operators. These combine the indicated
&&=, **=	operation with the assignment

Directives

Directives define a program's classes, methods, and routines. They are processed first to establish the classes, methods, or routines needed. They're identified by the double-colon (::).

The ::class and ::method directives identify the beginning of classes and methods in your code. They are how you define new classes and methods in your scripts. Code the directive for a new class or method, then code the class or method right after the keyword identifier.

Directives are placed at the end of the source file containing them. There are four key directives and several lesser-used ones:

::class — Defines a class
::method — Defines a method
::routine — Defines a callable subroutine
::requires — Specifies access to another source script

Built-in Objects

Open Object Rexx offers a set of built-in runtime objects that are always available to scripts. These help scripts interact with their environment, perform input and output, view environmental parameters, and inspect return codes. This table lists these built-in objects and their functions:

Built-in Object	Use		
.environment	The public environment object (a directory of global environmental info)		
.endofline	String that represents the end of line (CR or CR-LF in hex)		
.nil	An object that does not contain any data (used for testing existence)		
.rexxinfo	Returns platform-specific information		
.local	The local environment object (a directory of process-specific information)		
.debuginput	The default interactive debug input stream object		
.error	The error object for Rexx's error and trace outputs		
.input .output	The input and output objects (monitor objects for the default streams)		
.traceoutput	Holds the trace output target object		
.methods	Methods defined in the current program defined using ::method directives		
.rs	Return code from any executed command. 0 is success, 1 is error, -1 is failure		
.true .false	Boolean values for '1' and '0'		
.stdin .stdout .stderr	The default input, output, and error streams		
.stdque	Destination for PUSH and QUEUE; source for PULL and PARSE PULL		
.syscargs	All command-line arguments supplied		
.context	Context of the currently active Rexx execution environment		
.line	Line number currently being executed		

Special Variables

Open Object Rexx adds two new special variables. They are used for referencing objects because objectoriented programming requires a convenient way to refer to certain objects. self refers to the currently executing method, while super refers to the parent of the current object:

- □ self The object of the current executing method
- \square super The superclass or parent of the current object

New Instructions

Open Object Rexx enhances many of the instructions in classic Rexx and also introduces a few new ones. Among the new instructions, <code>expose</code> and <code>guard</code> are concerned with variable scoping and control access to an object's variables or attribute pool. <code>raise</code> is especially interesting in that it allows scripts to explicitly raise an exception or error condition. This supports a more flexible and generalized error trap facility than classic Rexx offers.

The new instructions include those in the following table:

Instruction	Use		
expose	Permits a method to access and update specified variables		
forward	Forwards the message that caused the active method to execute		
guard	Controls concurrent execution of a method		
loop	Similar to DO		
raise	Explicitly raises error conditions or traps		
reply	reply Sends an early reply from a method to caller, allowing concurrency		
use Retrieves arguments into a program, routine, function, or method			

New Functions

Open Object Rexx introduces a handful of new functions and enhances a few existing ones. Among the new functions are the ANSI-1996 standard string functions, changestr and countstr. Other new functions include beep, directory, lower, upper, and var.

The New Utility Functions

In addition to its regular functions, ooRexx contains about 75 *Utility Functions*. These are built-in functions, not an external function library. These functions are a superset of the RexxUtil function package described on pages 206-207. Many are specific to either Windows or Linux/Unix. These utilities enable you to retrieve platform dependent information and to manage the operating system and utilize its features. The names of these functions all begin with the letters Sys.

New Condition Traps

Open Object Rexx includes several new exception conditions, including ANY, NOMETHOD, NOSTRING, and USER. The ANSI-1996 standard LOSTDIGITS is also included.

Users can define their own exception conditions and raise conditions manually (explicitly) via the new raise instruction. This provides a more generalized and flexible error-handling mechanism than classic Rexx. It also conforms to the philosophy of many object-oriented programming languages (such as Java) that encourage managing errors through consolidated exception routines. Of course, because ooRexx is a superset of classic Rexx, whether you choose to handle exceptions through this newer approach or in a more traditional fashion is up to you. Either approach works; either is accepted by ooRexx.

Rexx API

The application programming interface, or API, allows you to interface applications to Open Object Rexx or extend the language. Applications are programs written in languages other than Rexx, such as C or C++. The ooRexx manuals provide all the details on how to interface other languages to ooRexx or extend the product's capabilities. Full documentation downloads with the product, and advanced sections explain the use of the API.

ooRexx for Windows

ooRexx comes complete with specialized abilities on Windows platforms. In addition to the 75 built-in Utility Functions for managing the Windows environment, ooRexx also has a set of about 10 more classes with some 125 methods designed specifically for Windows:

Class	Use		
WindowsProgramManager	Enables interaction with the Windows Program Manager		
WindowsClipboard	Use the Clipboard to transfer data		
WindowsRegistry	Control the Windows Registry. Retrieve, modify, add, delete entries		
WindowsEventLog	Interact with the Windows Event Log		
WindowsManager	Query, manipulate, and interact with desktop windows		
WindowObject	Query, manipulate, and interact with a window or its children		
MenuObject	Query, manipulate, and interact with a window's menu or submenu		
OLEObject	Manages OLE events		
OLEVariant	With OLEObject, provides a complete interface for OLE automation		

The ooRexx manual Windows Extension Reference provides complete details on all the Windows extensions.

ooRexx for Linux and Unix

ooRexx has support for Linux and Unix systems that parallels what we have just described for Windows. These 50-odd functions are in addition to the operating system Utility Functions described earlier. These functions categorize as follows:

Category	Use
Process and thread functions	Control processes and threads
User and group functions	Manage user ids and groups
File and file system functions	Manage files, directories, and permissions
Extended attribute functions	Manage extended file attributes for those OS's that support them
Name lookup functions	For retrieving information about servers and services
Miscellaneous functions	A half dozen miscellaneous functions

The manual *Unix Extensions Functions Reference* describes all these functions in detail.

Summary

Open Object Rexx is developed, supported, and maintained as a free and open source product by the non-profit Rexx Language Association. It's a true superset of classic Rexx, as defined by the TRL-2 and ANSI-1996 standards, and so runs the vast majority of classic Rexx programs without alteration.

This chapter summarized the features of ooRexx, how they support object-oriented programming, and how they extend beyond the classic Rexx standards. We enumerated how the language differs from classic Rexx, and discussed the many additions and extensions to the language. We should further note that the ooRexx website contains many useful tools for free downloading, including two different products for building GUI interfaces, and SQLite and other interfaces for database support.

Of course, since it runs classic Rexx code, ooRexx can use any of the many utilities coded in standard Rexx. Websites like www.RexxInfo.org and www.Rexx.org offer free downloads.

As a powerful, object-oriented language that retains Rexx's ease of use, ooRexx lies at the intersection of three of today's key software trends:

	High-level scripting
	Object-oriented programming
П	Free and open source software

The next chapter presents a complete tutorial on Open Object Rexx scripting. It starts by showing how to integrate just a few simple classes into a traditional Rexx script. Then, it proceeds more deeply into the built-in classes and methods of the product.

Eventually, the examples lead to our developing our own classes and using them to solve problems such as developing a stack data structure and implementing a video check-out system. The tutorial is designed so that, even if you have no object-oriented programming experience, you'll be able to quickly adapt your classic Rexx knowledge to learn object-oriented scripting.

Test Your Understanding

- **1.** Is Open Object Rexx a superset of classic Rexx? Will classic Rexx scripts run under ooRexx with- out change? What are inheritance and multiple inheritance? How are they implemented in Open Object Rexx?
- 2. What are encapsulation and polymorphism, and how does Open Object Rexx support them?
- **3.** Which class do you use to perform I/O? What advanced I/O features does this class's methods offer?
- **4.** What are the new special variables of Open Object Rexx, and how are they used?
- **5.** What are the four kinds of directives, and what are their functions?
- **6.** What are collections and the collection class? Name five of the collection classes, and describe their definitions.
- **7.** How do you define and manually raise a new error condition?
- **8.** What is the function of the expose instruction? How is it coded and used?

Open Object Rexx Tutorial

Overview

For those who practice object-oriented programming, the summary of Open Object Rexx provided by the previous chapter is all you need. Install the product, look over the sample scripts that come with it, review the class libraries and their methods, and you're ready to program. If you are familiar with object-oriented programming from languages like Java, C++, or Python, review the class libraries and start programming.

For everyone else, something's missing. The previous chapter discussed *the basics* of OO programming with Open Object Rexx, but more to describe its capabilities than to teach you how to use it. This chapter tries to fill that gap. For those new to object-oriented programming, it presents a simple tutorial. Assuming that you know classic Rexx, it bootstraps you into the world of object-oriented programming with simple, complete program examples.

Open Object Rexx is ideal for learning OOP because it retains full compatibility with classic Rexx; everything you've learned about classic Rexx still applies. You can tip-toe into the object-oriented world at your own pace by learning ooRexx. For example, you can still manipulate strings with the string functions of classic Rexx. Or, you can start using Open Object Rexx's string class methods in their place. You can still perform traditional Rexx I/O. Or, you can use the object-oriented stream class methods. Code with either approach in Open Object Rexx.

Open Object Rexx retains the advantages of simplicity and clear syntax from classic Rexx. It adds the classes, methods and all the other features of object-oriented programming with a minimum of new syntax. Concentrate on solving the problem at hand, and leverage Open Object Rexx's new features in the quest.

Let's quickly discuss the sample scripts in this chapter. The first is very short; it merely tests for the existence of a file. It illustrates how to use a stream object and a few of its methods perform I/O. The next two scripts show you how to create your own classes and methods. Then, a more ambitious script implements a video checkout application for a DVD library. The final example demonstrates concurrency, where methods within a class run at the same time.

A First Program

Open Object Rexx features a *class library*, a built-in set of classes and methods that adds a wide range of capability to traditional Rexx. The *methods* in this library perform actions, much like the built-in functions of classic Rexx. One easy way to start object-oriented programming with Object Rexx is just to program as in classic Rexx, but to replace function calls with object methods.

Here is an example. This simple script reads one input parameter from the command line, a filename. The program determines whether the file exists and displays a message with its result:

```
[root /usr/bin/oorexx]$ ./oorexx file_exist.orex square.orex
File exists
[root /usr/bin/oorexx]$ ./oorexx file_exist.orex nonesuch.txt
File does not exist
[root /usr/bin/oorexx]$
```

The program is called File Exist. In the first preceding run, the input file exists. In the second run, the file did not exist in the current directory. All the script does is write a message indicating whether the file specified on its command line exists. Recall that the syntax ./oorexx is merely a way of ensuring, on Unix-derived operating systems, that the module named oorexx in the current directory will be invoked to run the script.

Here is the code for the first program:

To work with file I/O in Open Object Rexx, you can either use classic Rexx instructions such as say, pull, parse pull, charin, charout, chars, linein, lineout, and lines, or you can use the new object-oriented methods. This script uses the methods.

The first action when using OO input/output is always to create a *stream instance*:

```
infile = .stream~new(file) /* create stream object */
```

This object manages I/O for one input or output file. To create it, we send the message <code>new</code> to the built-in <code>.stream</code> class. The <code>.stream</code> class is denoted by the period immediately prior to the keyword <code>stream</code>. We passed the filename from the user to the <code>new</code> method as its input parameter. Now we have an object created representing an I/O stream for that file.

The following code invokes the query method on the new stream object. The method returns the null string if the file does not exist in the current directory. If the file does exist, it returns the fully qualified name of the file:

The lineout method is invoked with the character string to write as its input parameter. .output is one of the special *built-in objects* described in Chapter 27. It is a *monitor object* that forwards the messages it receives to .stdout, the stream object representing standard output.

Of course, if the file does exist, the script writes the appropriate message:

This script uses the built-in object-oriented classes and methods for I/O. This same program could be coded using classic Rexx instructions such as say and pull, and it would have run under Open Object Rexx as well. All classic Rexx functions have object-oriented counterparts (methods) in Open Object Rexx.

The trick to learning ooRexx is to learn its class library. Remembering what it offers as built-in classes and methods is as important as knowing what functions are available in classic Rexx. This knowledge is the lever that enables you to exploit the language fully and let its built-in capabilities do the work for you.

Squaring a Number — Using Our Own Class and Method

The previous example shows how to leverage Open Object Rexx's large class library. This is especially useful when performing tasks that would otherwise require a lot of work, for example, in creating graphical user interfaces or performing database I/O. Now let's look at how to create and use our own classes and methods within ooRexx scripts.

This simple script squares a number. The user enters the number as a command-line argument, and the script writes back its squared value:

```
[root /opt/orexx/pgms]$ square.orex 4
The original value: 4 squared is: 16
```

Here is the code for this script:

```
/*********************
/* SQUARE
/*
/* Returns the square of a number
parse arg input .
                        /* get the number to square from user
value = .squared~new
                        /* create an object for a squared value */
sqd = value~square(input) /* invoke SQUARE method on INPUT value */
say 'The original value: 'input 'squared is: 'sqd
exit 0
::class squared
                        /* Here is the class.
                        /* Class SQUARED has 1 method, SQUARE.
 ::method 'square'
 use arg in
                        /* get the input argument
 return ( in * in )
                       /* square it and return that value
```

In this script, the first task is to create an instance to square the value. Depending on what school of OOP you follow, this instance might also be called an *object instance*, the *instantiation of an object class*, or just an *object*. We're not concerned with formal terminology here; you don't need to be to use ooRexx. This statement creates the object:

The next line in the script invokes the square method to perform the work of squaring the number. It does this by sending the appropriate message to the object:

```
sqd = value~square(input) /* invoke SQUARE method on INPUT value */
```

Look down further in the code to see the code of the square method and its class, called squared. All classes and methods must follow the procedural code located at the top of the program. New classes and methods are always placed at the bottom of the script. Two colons indicate a *directive*, an identifier for a class, method, routine or external code block. This line defines our new class called squared:

```
::class squared /* here is the class */
```

After the class directive, we place our methods and their code. This class has but a single method named square. This line defines this method:

```
::method 'square' /* Class SQUARED has 1 method, SQUARE. */
```

The name of a method is a character string. The interpreter matches this string with the message sent to the object (to invoke it) in the procedural code. Here the method name is coded within quotation marks, as many programmers prefer. You can also define a method name without the quotation marks:

```
::method square /* class SQUARED has 1 method, SQUARE */
```

The method's code immediately follows this method directive. Its first line reads its input argument:

```
use arg in /* get the input argument *,
```

In Open Object Rexx, you code use arg instead of arg or parse arg to retrieve one or more input arguments. The method squares the number provided in the input argument and returns it as its return string through the return instruction:

```
return ( in * in ) /* square it and return that value *,
```

That's it! You can create your own classes and methods in this fashion. Run the methods in those objects in the same way that you run the built-in methods provided by ooRexx.

In many ways, creating objects and methods is similar to creating subroutines and functions in classic Rexx. The difference is in the hierarchical structure of object-oriented programming. The ability to inherit behaviors (attributes and methods) through the class hierarchy minimizes the amount of new coding you have to do. This advantage becomes most pronounced in large programming projects, where the chances for code reuse are higher. It becomes significant in any situation in which you can optimally leverage ooRexx's built-in class library.

Another Simple 00 Program

Here's another simple OO script. This one allows the user to enter a shell name and responds with the full name of the shell or the operating system. Here's an example interaction with the program:

```
Enter the shell name:

csh

OS is: C Shell
```

The user enters a shell name, csh, and the script responds with its full name. Here's another interaction:

```
Enter the shell name:
COMMAND
OS is: Windows Command prompt
```

The user enters the shell for his or her operating system, COMMAND, and the program responds that the shell is used as a Windows command window prompt. The program recognizes a couple other inputs (ksh and CMD), but comes back with this message for any other input:

```
Enter the shell name:
pdksh
OS is: unknown
```

Here is the code for the script:

```
/* WHICH OS
/* Tells which OS system you use depending on the command shell.
os = .operating_systems~new /* create a new object
                                                       */
os~write command shell
                         /* invoke method to do the work
exit 0
                         /* always code an EXIT instruction */
::class operating systems
                         /* class w 2 methods following it */
 ::method init
                         /\star method prompts for shell name
                                                       */
   expose shell
                        /* EXPOSE the shared variable
   say 'Enter the shell name:' /* prompt and read user input
   parse pull shell .
 ::method write command shell /* this method determines OS
   expose shell
                         /* determine the OS response
   select
    when shell = 'CMD' then string = 'Windows cmd.exe'
     when shell = 'COMMAND' then string = 'Windows Command prompt'
    otherwise string = 'unknown'
   end
   say 'OS is:' string
                            /* write out the OS determined */
   return 0
```

This script only contains three lines of procedural code. The first line creates a new instance of the class .operating systems. Send the class the new method message to create a new instance of the class:

```
os = .operating systems~new /* create a new object */
```

The second line in the program runs the method write_command_shell in the class. This method does all the real work of the program:

```
os~write_command_shell /* invoke method to do the work */
```

The last line of procedural code, the <code>exit</code> instruction, ends the program. Class and method directives follow, along with the code that defines them. The class(es) and their method(s) are always placed at the bottom of the code in the script. This line defines the <code>.operating systems</code> class:

```
::class operating systems /* class w 2 methods following it */
```

This class is followed by its two methods. The first is the init method:

```
::method init $/\ast$ method prompts for shell name \ensuremath{\,^{\star}/}
```

The init method is a specially named method. Open Object Rexx always runs the init method (if there is one) whenever its creates a new instance via the new message. So, the first line in the script not only created a new instance of the operating_systems class but also automatically ran the init method.

In the init method, the first line of code uses the expose instruction to access the variable named shell. By using expose, the method has read and update capability on any variables or attributes it names. The expose instruction is the basic technique by which attributes can be shared among methods in a class:

```
expose shell /* EXPOSE the shared variable */
```

After accessing this variable, the init method prompts the user to enter a shell name, reads that user input, and returns:

The second line of code in the driver runs the write_command_shell method. This method also accesses the attribute shell by its expose instruction:

```
expose shell
```

Then, the method executes a select instruction to determine the full shell name or associated operating system, and its writes this response to the user:

When this method returns, the main routine or procedural code terminates with an exit instruction.

This script shows how user interaction can be encapsulated within classes and methods. The procedural code in the main routine or driver can be minimal. The classes and their methods perform all the work. Once you start thinking in object-oriented terms, you'll develop the knack of viewing problems and their solutions as groups of interacting objects with their logical methods.

Implementing a Stack through Objects

Object Rexx provides a large set of *collection classes*, built-in classes that provide a set of data structures and for data manipulation. Some of the key collection classes are:

- \square Array A sequenced collection
- ☐ Bag A nonunique collection of objects (subclass of Relation)

Chapter 28

- ☐ Directory A collection indexed by unique character strings
- ☐ List A sequenced collection which allows inserts at any position
- Queue A sequenced collection that allows inserts at the start or ending positions
- ☐ Relation A collection with nonunique objects for indexes
- ☐ Set A unique collection of objects (subclass of Table)
- ☐ Table A collection with unique objects for indexes

You'll rarely have to create your own data structures with all this built-in power available. But for the purpose of illustration, we use the List collection class as the basis to implement a stack in the next sample script.

Here is a sample interaction with the stack script:

```
Enter items to place on the stack, then EXIT
line1
line2
line3
line4
exit
Stack item # 1 is: LINE4
Stack item # 2 is: LINE3
Stack item # 3 is: LINE2
Stack item # 4 is: LINE1
```

The script prompts the user to enter several lines and then the keyword exit. Here the user entered four lines plus the keyword exit. Then the script pops the stack to retrieve and print the items. Since a stack is a last-in, first-out (LIFO) data structure, the items display in the reverse order in which they are entered.

How do we design this script? First, identify the stack as the entity or *object* with which the script works. This should be a class that we can instantiate by creating an object.

Second, try to identify which operations or *methods* need to be executed on that object. Push and pop are two key stack operations, so we'll need a method for each of these. Further reflection leads to the realization we also require an initialization method (init) and a method to return the number of items on the stack.

Identifying objects and their methods are the basic steps in object-oriented design. One other step (not relevant to this simple example) is determining the relationships or interactions between objects.

So, the script will have one class, called stack, and four methods in that class. Here are the methods and their functions:

- ☐ init Initializes the stack
- □ push Places an item (or line) onto the stack (*pushes* the item)
- □ pop Retrieves an item from the stack (*pops* the item)
- □ number_items Returns the number of items on the stack

With this understanding of what objects and methods are required, we can write the program:

```
/* STACK
/*
/* Implments a Stack data structure as based on the LIST Collection */
the_stack = .stack~new
                              /* create a new stack object
.output~lineout('Enter items to place on the stack, then EXIT')
do while (stack_item <> 'EXIT')
                                                       * /
  stack_item = .input~linein~translate /* translate to upper case */
end
do j=1 by 1 while (the_stack~number_items <> 0) /* pop and display */
 say 'Stack item #' j 'is: ' the_stack~pop /* all stack items */
end
exit 0
                             /* define the STACK class
::class stack
::method init
                            /* define INITIALIZATION method
 expose stack_list
                            /* STACK_LIST is our stack.
 stack_list = .list~new
                            /* create a new STACK as a LIST
::method push
                            /* define the PUSH method
                                                         * /
  expose stack_list
  use arg item
  stack_list~insert(item, .nil) /* insert item as 1st in the LIST */
::method pop
                            /* define the POP method
                                                         * /
  expose stack_list
  if stack_list~items > 0 then
                           /* return item, remove from stack */
    return stack_list~remove(stack_list~first)
  else
                             /* return NIL if stack is empty */
    return .nil
 ::method number_items
                             /* define the ITEMS method
  expose stack_list
  return stack_list~items
                            /* return number of items in stack*/
```

As in previous scripts, the first action is to create an instance of the class object. Here we create a stack to work with:

```
the_stack = .stack~new /* create a new stack object */
```

The program prompts the user to enter several lines of data:

The script reads a line with the linein method applied to the default input stream via the .input monitor object. This input line is then acted upon by the translate method. The code chains these two methods so that they execute one after the other. This reads and translates the input to uppercase.

For each line the script reads, it places it into the stack. This runs the push method with the stack_item as input:

```
the_stack~push(stack_item) /* push onto the stack and */
```

After all user-input lines have been read and placed onto the stack, this loop retrieves each line from the stack via the pop method and writes them to the user:

The loop invokes our method number_items on the stack to determine how many items are in the stack. All the methods expose the stack so that they can work with it and read and alter its contents. Here is the code that exposes the program's shared attribute:

```
expose stack_list /* STACK_LIST is our stack. */
```

Let's discuss each of the methods in this program. The init method automatically runs when the stack object is first created; it merely creates a new List object. Recall that we selected the built-in *collection class* of type List with which to implement our stack. This line in the init method creates the new List object:

```
stack_list = .list~new /* create a new STACK as a LIST */
```

The push method grabs its input argument and places it into the stack. It uses the List class's insert method to do this. The first argument to insert is the line to place into the list, while the second is the keyword .nil which says to place the item first in the list:

```
use arg item stack_list~insert(item, .nil) /* insert item as 1st in the LIST */
```

The pop method checks to see if there are items in the stack by executing the List class's method items. If the List contains one or more items, it returns the proper item from the List by the remove method:

If there are no items in the List, the pop method returns the NIL object. Coded as .nil, this represents the absence of an object (much in the same manner the null string represents the string with no characters).

The method number_items simply returns the number of items currently on the stack. It does this by running the List method items:

To summarize, this script shows how you can use an object and Open Object Rexx's built-in collection classes and methods to create new data structures. With its built-in collection classes, ooRexx is a rich language in terms of its support for data structures.

A Video Circulation Application

The next script controls videos for a store that rents movie DVDs. It is a more ambitious script that demonstrates how a number of methods can be applied to a Directory collection class object. The program presents a menu like the following one to the user. After the user makes a selection, the script performs the action the user selected. Here's an example, where the store employee adds a new DVD title to the collection:

```
1. Add New DVD
2. Check Movie Out
3. Check Movie In
4. Show Movie Status
5. Remove Lost DVD
X. Exit
Enter Your Choice ==> 1

Enter Movie TITLE ==> Titantic
Movie added to titles: TITANTIC
```

After each action is complete, the script clears the screen again and redisplays the menu. The program terminates when the user selects the option: X. Exit.

The program error-checks for logical mistakes. For example, it will not let the user check out a video that is already checked out, nor will it allow the user to check in a movie that is already on hand. The script always ensures the title the user refers to is in the collection. If not, it writes the appropriate message to the user.

As in the stack program, the Videos program implements an in-memory data structure to control the videos. This script uses the Directory built-in collection class to make an indexed list of videos. The film title is the index into the Directory; the sole data item associated with the video's title is its status. The status can either be IN LIBRARY OF CHECKED OUT. For simplicity, the program assumes that there is only a single copy or DVD for each movie title.

The Directory of videos will be the class called movie_dir. The methods for this class are:

□ init—Initialize the Directory
 □ add_movie—Add a film to the circulating collection
 □ check_out_movie—Check a movie out
 □ check_in_movie—Check a movie back in
 □ check_status—List the status of a movie (IN LIBRARY or CHECKED OUT)
 □ lost_or_destroyed—Remove a lost or destroyed DVD from the circulating collection

Here is the script:

```
/* VIDEOS
/*
/* An in-memory circulation system for films on DVD.
                                                           * /
movie_list = .movie_dir~new
                          /* create new Directory object
                                                           * /
do while selection <> 'X'
  /* display menu of options
                                                           */
  'clear'
  say "1. Add New DVD" ; say "2. Check Movie Out"
  say "3. Check Movie In" ; say "4. Show Movie Status"
  say "5. Remove Lost DVD" ; say "X. Exit"
  /* prompt user to enter his choice and the movie title
                                                          * /
  call charout ,'Enter Your Choice ==> '
  pull selection . ; say " "
  if (selection <> 'X') then do
     call charout ,'Enter Movie TITLE ==> '
     pull title .
  end
  /* perform user selection
                                                           * /
  select
     when selection = '1' then movie_list~add_movie(title)
     when selection = '2' then movie_list~check_out_movie(title)
     when selection = '3' then movie_list~check_in_movie(title)
     when selection = '4' then movie_list~check_status(title)
     when selection = '5' then movie_list~lost_or_destroyed(title)
     when selection = 'X' then exit 0
    otherwise say 'Invalid selection, press <ENTER> to continue...'
  end
  pull .
                        /* user presses ENTER to continue
                                                          * /
end
exit 0
::class movie_dir
                          /* define the MOVIE_DIR class
                          /* INIT - create the DIRECTORY
  ::method init
    expose mv_dir
                          /* expose the DIRECTORY of interest*/
    mv_dir = .directory~new /* creates the DIRECTORY class
  ::method add_movie
                          /* ADD_MOVIE
                                                           * /
    expose mv_dir
                           /* if title is new, add it by PUT */
    use arg title
    if .nil = mv\_dir~at(title) then do
       say 'Movie added to titles:' title
```

```
end
                           /* if title is not new, err message*/
  else
     say 'Movie is already in collection:' title
::method check_out_movie
                          /* CHECK_OUT_MOVIE
  expose mv_dir
                           /* if title doesn't exist, error
                                                               * /
  use arg title
  if .nil = mv_dir~at(title) then
     say 'No such title to check out:' title
                          /* if ALREADY checked out, error
     if 'CHECKED OUT' = mv_dir~at(title) then
        say 'Movie already checked out:' title
                           /* if no error, check out the title*/
     else do
        mv_dir~setentry(title,'CHECKED OUT') /* alters data*/
        say 'Movie is now checked out:' title
        end
  end
::method check_in_movie
                          /* CHECK_IN_MOVIE
                                                               * /
  expose mv_dir
  use arg title
  if .nil = mv_dir~at(title) then /* if no title, error
                                                              * /
     say 'No such title to check in: ' title
  else do
                                    /* if not checked out, err */
     if 'IN LIBRARY' = mv_dir~at(title) then
        say 'This title is ALREADY checked in:' title
     else do
                                    /* otherwise check it in */
        mv_dir~setentry(title,'IN LIBRARY') /* alters data */
        say 'The title is now checked back in: ' title
     end
  end
::method check_status
                          /* CHECK_STATUS
                                                               * /
  expose mv_dir
                                                               * /
  use arg title
                           /* if no such title, error
  if .nil = mv\_dir~at(title) then
     say 'Title does not exist in our collection:' title
                           /* if title exists, show its status*/
     say mv_dir~at(title) /* retrieve data by the AT method */
                                                               * /
::method lost_or_destroyed /* LOST_OR_DESTROYED
  expose mv_dir
  use arg title
  if .nil = mv_dir~at(title) then /* if no such title, error
     say 'Title does not exist in our collection:' title
                           /* if title exists, remove it
  else do
     mv_dir~remove(title) /* REMOVE method deletes from Dir. */
     say 'Title has been removed from our collection:' title
  end
```

The first line of procedural code creates the instance or object the script will work with. This is the same approach we've seen in previous example scripts, such as the Stack and Which OS programs:

The next block of code clears the screen, displays the menu and reads the user's selection. The select instruction runs the proper method to perform the user's selection. The .movie_dir class and its six methods follow the procedural code. Let's briefly discuss each of the methods.

The init method creates the Directory instance:

The add_movie method checks to see if the title the user entered is in the circulating collection. It uses the at method on the Directory object to do this:

```
if .nil = mv\_dir~at(title) then do
```

If .nil is returned, the script adds the title to the circulating collection (the Directory) with the status IN LIBRARY:

```
mv_dir~put('IN LIBRARY',title) /* add by PUT method */
```

The put method places the information into the Directory. To check out a DVD, the method check_out_movie uses the setentry method on the Directory to alter the DVD's status:

```
mv_dir~setentry(title,'CHECKED OUT') /* alters data *
```

Method check_in_movie similarly runs the setentry built-in method to alter the DVD's status:

```
mv_dir~setentry(title,'IN LIBRARY') /* alters data */
```

Method check_status executes method at to see whether or not a film is checked out:

```
if .nil = mv_dir~at(title) then
```

It then displays an appropriate message on the status of the video by these lines:

Finally, the method lost_or_destroyed removes a title from the circulating collection by running the Directory remove method:

```
mv_dir~remove(title) /* REMOVE method deletes from Dir. */
```

Like most of the collection classes, Directory supports alternative ways of invoking several of its methods. Here are a couple alternative notations:

- ☐ []—Returns the same item as the at method
- \Box []= —Same as the put method

For example, we could have written this line to add the new title to the Directory:

```
mv_dir[title] = 'IN LIBRARY'
```

This statement is the direct equivalent of what we actually coded in the sample script:

```
mv_dir~put('IN LIBRARY',title) /* add by PUT method */
```

Similarly, we could have checked for the existence of a title by referring to mv_dir[title] instead of coding the at method as we did. This is another way of coding that reference:

```
if .nil = my_dir[title] then
```

This statement is the same as what was coded in the script:

This script employs simple say and pull instructions to create a simple line-oriented user interface. Most programs that interact with users employ graphical user interfaces or GUIs. How does one build a GUI with Open Object Rexx? This is where the power of built-in classes and methods comes into play. The menu becomes a *menu object* and the built-in classes and methods activate it. Creating a GUI becomes a matter of working with prebuilt objects typically referred to as *widgets* or *controls*. Chapter 16 discusses graphical user interfaces for object-oriented Rexx scripting. Besides a GUI, the other feature that is missing from the Videos script is *persistence*, the ability to store and update object data on disk. This simple script implements the entire application in memory. Once the user exits the menu, all data entered is lost. Not very practical for the video store that wants to stay in business!

Object-oriented programmers typically add persistence or permanence to their objects through interfacing with one of the popular database management systems. Among commercial systems, Oracle, DB2 UDB, and SQL Server are popular. Among open-source products, MySQL, PostgreSQL, and Berkeley DB are most popular.

GUI and database capability are beyond the scope of our simple example. Here the goal was to introduce you to object-oriented programming, not to get into the technologies of GUIs and databases. Of course, these interfaces are used by most real-world object-oriented Rexx programs. Using class libraries and methods reduces the work you, as a developer, must do when programming these interfaces.

Concurrency

Object-oriented programming with Open Object Rexx is *concurrent* in that multiple objects' methods may be running at any one time. Even multiple methods within the same object may execute concurrently.

The following sample script illustrates concurrency. Two instances of the same class are created and execute their single shared method concurrently. To make this clearer, here is the script's output. The intermixed output shows the concurrent (simultaneous) execution of the two instances:

```
Repeating the message for object #1 5 times.

Object #1 is running
Object #2 is running
Repeating the message for object #2 5 times.

Object #1 is running
Object #2 is running
Driver is now terminating.

Object #1 is running
Object #2 is running
Object #2 is running
Object #1 is running
Object #1 is running
Object #1 is running
Object #2 is running
Object #2 is running
Object #2 is running
Object #2 is running
```

Object #1 and Object #2 are two different instances of the same class. That class has one method, called repeat, which displays all the messages seen above, from both objects (other than the one that states that the Driver is now terminating.)

Here is the code of the script:

```
/* CONCURRENCY
                                                        * /
                                                        */
/* Illustrates concurrency within an object by using REPLY instruction */
say object1~repeat(1,5)
say object2~repeat(2,5)
                           /* get 1st object running
                                                        * /
                             /* get 2nd object running
say 'Driver is now terminating.'
exit 0
                             /* define the CONCURRENT class
::class concurrent
::method repeat
 use arg who_am_i, reps
                             /* define the REPEAT method
                             /* get OBJECT_ID, time to repeat
 reply 'Repeating the message for object #' || who_am_i reps 'times.'
 do reps
  say 'Object #'|| who_am_i 'is running' /* show object is running */
```

The script first creates two separate instances of the same class:

The next two lines send the same message to each instance. They execute the method repeat with two parameters. The first parameter tells repeat for which object is it executing (either 1 for the first object or 2 for the second). The second parameter gives the repeat method a loop control variable that tells it how many times to write a message to the display to trace its execution. This example executes the method for each instance five times:

Following these two statements, the driver writes a termination message and exits. The driver has no further role in the program. Almost all of the program output is generated by the repeat method, written to show its concurrent execution for the two instances.

Inside the repeat method, this line collects its two input arguments. It uses the use arg instruction to read the two input arguments:

```
use arg who_am_i, reps /* get OBJECT_ID, time to repeat */
```

The next line issues the reply instruction. reply immediately returns control to the caller at the point from which the message was sent. Meanwhile, the method containing the reply instruction keeps running:

```
reply 'Repeating the message for object #' || who_am_i reps 'times.'
```

In this case, reply sends back a message that tells which object is executing and how many times the repeat method will perform its do loop. Now, the repeat method message loop continues running. This code writes the message five times to demonstrate the continuing concurrent execution of the repeat method:

```
do reps
   say 'Object #'|| who_am_i 'is running' /* Show object is running */
end
```

This simple script shows that objects and methods execute concurrently, and that even methods within the same object may run concurrently. Open Object Rexx provides a simple approach to concurrency that requires more complex coding in other object-oriented languages.

Summary

This chapter introduces classic Rexx programmers to Open Object Rexx. It does not summarize or demonstrate all the OO features of ooRexx. Instead, it presents a simple tutorial on the product for those from a procedural-programming background.

We started with a very simple script. That first script created a stream instance and demonstrated how to perform object-oriented I/O. Two more advanced scripts followed. These showed how to define and code your own classes and methods. The Stack sample program was more sophisticated. It defined several different methods that demonstrated how to employ the List collection class to implement an inmemory stack data structure. The Videos application built upon the same concepts, this time using the Directory collection class to simulate a video circulation control system. Finally, the Concurrency script illustrated the use of two instances of the same class and the concurrent execution of their methods.

Open Object Rexx is ideal for learning object-oriented programming. It retains all the simplicity and strengths of classic Rexx while surrounding it with a plethora of OO features and the power of an extensive class library.

Test Your Understanding

- **1.** Will every classic Rexx program run under Open Object Rexx? When might this be useful? Does this capitalize on ooRexx's capabilities?
- **2.** Are all classic Rexx instructions and functions part of Open Object Rexx? Which additional instructions and functions does ooRexx add?
- **3.** What is a collection and how are they used?
- **4.** Convert these two functions in classic Rexx to ooRexx method calls:

```
reversed_string = reverse(string)
sub_string = substr(string,1,5)
```

- **5.** Do the stream class methods offer a superset of classic Rexx I/O functions? What additional features do they offer?
- **6.** What are the four kinds of directives and what is each used for? Where must classes and methods be placed in a script?
- **7.** What symbols commonly express at and put in many collections?
- **8.** What are the error (.error), input (.input), and output (.output) monitor objects used for?

IBM Mainframe Rexx

Overview

IBM bundles Rexx with all its mainframe operating systems. These include operating systems in what we generically refer to as the OS, VM, and VSE families. IBM mainframe Rexx is not an open source product but rather is bundled with commercial mainframe operating systems. The name of the product is often written in uppercase, as REXX. For consistency, we'll continue to refer to it as Rexx.

Mainframe Rexx is important for several reasons. Rexx was originally offered on the mainframe (specifically for VM/CMS). VM influenced early development of the language, leaving its imprint in various ways. For example, the stack is a VM/CMS feature, and many VM/CMS commands send their output to the stack. The stack remains a popular means for command I/O in mainframe Rexx today, and most of the free Rexx interpreters support the stack in this role.

Mainframe Rexx is important because of the key role mainframes continue to play in many IT organizations. While the mainframe has a low profile in the trade press and in industry buzz, thousands of sites worldwide continue to rely on mainframes for their most vital business operations. Mainframes remain critical to organizations around the world. Rexx is the predominant mainframe scripting language. No other scripting language comes anywhere close to Rexx's usage level on the mainframe. Nor does any other scripting language interface to so many mainframe subsystems and address spaces.

Many readers will face the prospect of porting Rexx code from the mainframe to other platforms. This often means changing IBM mainframe scripts into free Rexx scripts that run under Linux, Unix, or Windows. Briefly comparing the differences between mainframe Rexx and open source Rexxes may be useful.

IT professionals will want to apply their skills across many platforms. They may have learned Rexx on the mainframe and now wish to script on some other platform. Or, they may be from the Windows, Linux or Unix background and are unfamiliar with mainframes. Rexx offers a quick means to become instantly productive across varied platforms. You can easily transfer your Rexx skills from Windows, Linux, or Unix to the mainframe environment or vice versa.

This chapter describes the differences among IBM mainframe Rexx, the Rexx standards, and the free Rexx interpreters this book discusses. The goal is to sketch the major differences between IBM mainframe Rexx and the free Rexxes, as well as outline the extended features of mainframe Rexx.

These appendices drill deeper into more aspects of mainframe Rexx:

Ш	Appendix EMainframe extended functions
	Appendix N Using EXECIO for I/O
	Appendix O How to write ISPF edit macros
	Appendix P How to run Rexx in batch (with JCL)
	Appendix Q Rexx versus Clist comparison
П	Appendix Z BRexx/370 for mainframe emulation on your PC

VM Rexx Differences

Rexx differs in slight ways across the three mainframe operating system families, which we refer to generically as VM, OS, and VSE. All IBM mainframe Rexx implementations meet the TRL-2 standard (with one or two very minor exceptions, which we'll discuss).

Almost all of the special features of mainframe Rexx are language extensions. This section summarizes them for VM Rexx. The information is based on the VM REXX Reference manual. Where they fit in, we add a few comments on OS/TSO Rexx, based on TSO/E REXX Reference and TSO/E REXX User's Guide. The next section, "OS/TSO Rexx Differences," explores the extended features of OS/TSO-E Rexx in greater detail. You can freely download all Rexx-related IBM manuals from www.RexxInfo.org.

This section compares VM Rexx to the ANSI-1996 standard and also enumerates many of its differences from free Rexx interpreters for other operating systems such as Linux, Windows, and Unix. Figure 29-1 summarizes many of the major differences:

Let's now discuss these extended features of VM/CMS Rexx.

First line

The first line of a VM/CMS Rexx script must be a comment. The first line of an OS TSO/E Rexx script normally must contain the word REXX. We recommend the first line of any mainframe script contain this first line, which satisfies both requirements:

```
/* REXX */
```

This first line is portable across almost all Rexx interpreters on all systems. The primary exceptions are those Linux, Unix, or BSD environments in which the first line of code traditionally indicates the location of the Rexx interpreter (such as: #!/usr/local/bin/regina). Running scripts explicitly on these systems avoids the need for a first line that indicates where the Rexx interpreter resides, in most cases.

How VM Rexx Differs

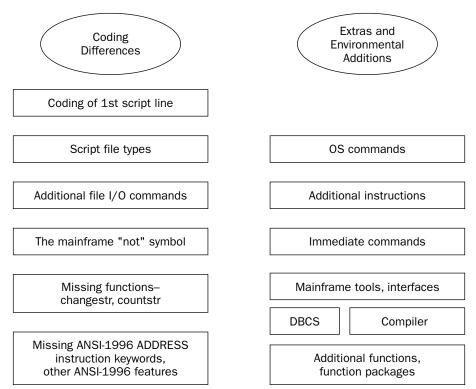


Figure 29-1

Online help facility

The help facility is a VM feature that distinguishes it from other platforms because the VM help facility includes Rexx documentation. For example, you can display information about Rexx instructions and functions via the help facility. Let's look at a few examples. To get information about the say instruction, you could enter:

help rexx say

To get information about a Rexx error message, enter help with that message id. Here is the generic command template:

help msgid

For example, for help on message ID dmsrex460e, enter that message ID as the operand on the help command:

help dmsrex460e

File types

Mainframes use different file-naming conventions than other platforms. These differences apply to files containing Rexx scripts in several ways. Under VM, Rexx scripts typically reside in files of type EXEC. For this reason, Rexx scripts are often referred to as EXECs or REXX EXECs.

VM Rexx scripts designed to run as editor *macro commands* (or editor scripts) have the file type of XEDIT. These are referred as *edit macros*. Edit macros issue commands to the XEDIT Editor and can automatically drive the editor. Or, they can extend the editor's functionality or tailor or automate its use.

CMS pipelines use the file type REXX to identify a stage or program in the pipeline. CMS pipes are an alternative to the stack and provide a general-purpose communications vehicle popular on VM mainframes. Each stage in the pipeline manipulates or processes data.

In OS (or TSO) environments, Rexx scripts may either be sequential data sets or members of partitioned data sets (PDSs). PDS libraries of scripts are most common. Filenames for Rexx scripts under TSO/E normally end in EXEC.

"Not" symbol

Mainframe scripts often use this symbol \neg as the "not" operator, for example, as in "not equal" \neg =. We recommend using the universally accepted, ANSI-standard backslash instead. For "not equal," for example, use: \setminus =. The backslash appears on all keyboards and is more transportable than the traditional mainframe "not" symbol. Other portable alternatives available on all keyboards for "not equal" include <> and ><. This principle also applies to the other operators, such as "not greater than" (\setminus >) and "not less than" (\setminus <).

OS commands

VM Rexx scripts can issue both CMS and CP commands. CMS has its own command and function search order. Scripts can also issue subcommands. As always, limiting the number of OS-specific commands leads to more portable code, but there are techniques to limit the impact of OS-specific commands even when they must be included. For example, isolate OS-specific code in particular routines, or code if statements that execute the commands appropriate to the OS under which the script runs. Chapter 13 explores these techniques for code portability.

Instructions

VM Rexx adds a few new keywords for the options and parse instructions, as well as the upper instruction. These extended features are of relatively minor importance, but we mention them here for completeness. Note that mainframe Rexx thoroughly supports the Double-Byte Character Set (DBCS). The DBCS supports spoken languages that require more bits for proper representation of their symbology. For example, DBCS can be used to support languages based on ideographic characters, such as Asian languages such as Chinese, Japanese, or Korean. Here is a brief list of the mainframe-extended Rexx instructions:

Instruction	Use
OPTIONS	Several options specify how strings and the Double-Byte Character Set (DBCS) are handled.
PARSE	Two new keywords are added to standard Rexx:
	The external keyword parses the next string from terminal input.
	The numeric keyword retrieves the current numeric settings.
UPPER	This translates a string to uppercase.

Functions

VM Rexx provides a grab-bag of extended built-in functions. The FIND, INDEX, and JUSTIFY functions have largely been superceded by standard Rexx functions. Use WORDPOS, POS, RIGHT, and LEFT instead of the mainframe functions for more portable, standardized scripts. The EXTERNALS and LINESIZE functions manage I/O to the terminal (or the desktop computer emulating a terminal). Here are the extended VM functions:

Function	Use
EXTERNALS	Returns the number of elements in the terminal input buffer
FIND	Returns the word number of a specified word within a string (similar to the wordpos function in ANSI-standard Rexx)
INDEX	Returns the character position of one string within another (similar to the pos function in ANSI-standard Rexx)
JUSTIFY	Justifies a string by adding pad characters (use the right, left, and space ANSI-standard functions instead)
LINESIZE	Returns the current terminal line width
USERID	Returns the system-defined user identifier

 $VM\ Rexx\ also\ adds\ over\ a\ dozen\ functions\ to\ handle\ the\ DBCS.\ All\ begin\ with\ the\ letters\ DB.\ We\ have\ not\ listed\ the\ DBCS\ functions\ in\ the\ preceding\ chart.$

Some standard Rexx functions are enhanced with mainframe-unique parameters. For example, the STREAM function includes specifications for LRECL and RECFM. These specifications describe the way files are structured in the mainframe environment.

Appendix E provides function formats and a usage description for the additional built-in mainframe functions.

Function packages and external functions

The VM Rexx language processor knows about and automatically loads any or all of these three named packages if any function within them is invoked from within a script: RXUSERFN, RXLOCFN, and RXSYSFN. Users may add their own functions to these libraries. These additional VM Rexx external functions are also automatically loaded if invoked:

External Function	Use
APILOAD	Includes a binding file in a Rexx program
CMSFLAG	Returns the setting of certain characters
CSL	Invokes callable services library (or CSL) routines
DIAG	Communicates with CP through the DIAGNOSE instruction
DIAGRC	Similar to the DIAG instruction
SOCKET	Provides access to the TCP/IP socket interface
STORAGE	Inspects or alters the main storage of the user's virtual machine

CMS immediate commands

The CMS *immediate commands* can be used to dynamically halt and restart script execution or the Rexx trace facility from outside the script. Since these commands operate from outside of scripts, you could, for example, start a script, then type in a TS immediate command while it runs. This dynamically turns on the trace facility in real time. Entering the TE command would immediately turn off the trace. Immediate commands act like toggle switches that you access from outside the script without making any code changes.

The immediate commands include:

ні — Halt Interpretatior
TS — Trace Start
те — Trace End
нх — Halt Execution
нт — Halt Typing

RT — Resume Typing

Compiler

IBM provides Rexx compilers for both VM and OS. To be more precise, IBM provides one compiler that generates code suitable for the operating system platform on which it runs. This compiler allows you to quickly develop scripts with the interactive interpreter, then convert finished programs to object code by compiling them. This approach yields the benefits of an interpreter in quick development and interactive debugging along with the compiler advantage of faster program execution for finished programs.

We note that the relative performance gain one experiences from compiling varies according to the environment and the nature of the script itself. A good example of a script that might benefit from compilation is a computationally intensive program. As another example, systems that do not execute much code outside of the Rexx environment might also see significant benefits. Yet there are situations where the compiler underperforms the Rexx interpreter. So, while compiled scripts are generally faster, we don't wish to oversimplify the relative performance of compiled versus interpreted scripts in the mainframe environment.

As in other environments, the mainframe compiler can be used as a mechanism to hide source code. Some organizations use the compiler, for example, where audit or security rules forbid the presence of source code in the production environment. The compiler can also aid in better syntax checking. For example, it checks all logic branches in a program, whereas the Rexx interpreter only verifies branches that execute.

Useful CMS commands

A number of CMS commands are especially useful from within VM Rexx scripts. These have no special relationship to Rexx; they are part of the CMS operating system and are CMS commands. But since they are commonly issued from within scripts, we list them here:

CMS Command	Use
DESBUF	Clears (drops) all stack input/output buffers
DROPBUF	Deletes the most recent stack buffer or a specified set of them
EXECDROP	Deletes EXECs residing in storage
EXECIO	Performs I/O, or issues CP commands and captures results
EXECLOAD	Loads an EXEC, readies it for execution
EXECMAP	Lists EXECs residing in storage
EXECSTAT	Provides EXEC status
FINIS	Closes files
GLOBALV	Saves EXEC data or variables
IDENTIFY	Returns system information
LISTFILE	Lists files
MAKEBUF	Creates a new buffer in the stack
PARSECMD	Parses EXEC arguments
PIPE	Calls CMS Pipelines to process a series of programs or stages; each stage manipulates or processes data
QUERY	Queries SET command information
SENTRIES	Tells how many lines are in the program stack
SET	Modifies the function search order; controls screen I/O or tracing
XEDIT	The XEDIT editor may be controlled by Rexx scripts called edit macros

OS/TSO Rexx Differences

As with VM Rexx, almost all of the special features of mainframe Rexx for OS/TSO are language extensions. This section summarizes the major differences. The information is from TSO/E REXX Reference, SC28-1975 (version 2 release 10) and TSO/E REXX Reference SA22-7790 (version 1 release 6). The intent is to point out the extended features of OS/TSO Rexx versus ANSI-standard Rexx and the free Rexx interpreters available for environments such as Linux, Unix, and Windows. This section adds to some of the comments made in the earlier section entitled "VM Rexx Differences." We will not repeat the information already discussed in that section.

Figure 29-2 summarizes some of the major differences between Rexx under OS/TSO versus other platforms. The additional features and facilities of Rexx for TSO/E outweigh the few language elements that it lacks.

How TSO/E Rexx Differs

Extras and Missing or Environmental Different Additions Coding of 1st script line Additional instructions Additional functions Missing conditions-LOSTDIGITS, NOTREADY **DBCS** Compiler Missing functions-TSO/E external functions changestr, countstr TSO/E Rexx commands Missing ANSI-1996 ADDRESS instruction keywords, other Immediate commands ANSI-1996 features TSO/E programming services Standard I/O functions are in an external package Mainframe interfaces, tools

Figure 29-2

Let's discuss the details of the differences between programming Rexx in OS environments versus other platforms.

Additional instructions and functions

OS/TSO Rexx adds the exact same instructions and functions as does VM Rexx. See the two tables in the previous VM description labeled "Instructions" and "Functions" for complete lists and descriptions of these additions.

TSO/E external functions

While its extra instructions and built-in functions are very nearly the same as those for VM, OS/TSO Rexx differs almost totally from VM Rexx in its additional external functions. These are the OS TSO/E Rexx extensions:

External Function	Use
GETMSG	Returns a message issued during the console session. Since this affects the system console, most sites only authorize using this function in special situations.
LISTDSI	Returns information about a data set, including its allocation, protection, and directory.
MSG	Tells whether TSO/E messages are being displayed while the script runs. This status will be either ON or OFF.
MVSVAR	Returns information about the current session or security labels.
OUTTRAP	Either returns the name of the variable in which trapped output is stored, or returns OFF if trapping is turned off.
PROMPT	Returns the prompt setting for the script, either ON or OFF.
SETLANG	Returns a three-character code that tells the spoken language in which Rexx messages are displayed.
STORAGE	Reads a given number of bytes of storage from a specified address.
SYSCPUS	Returns information about active CPUs in a stem variable.
SYSDSN	Returns information about whether a given dsname is available for use.
SYSVAR	Returns information about the current session, including software levels, the logon procedure, and user id.

TSO/E Rexx commands

Another important extension to OS/TSO Rexx are its set of over 15 *commands*. These commands perform services such as controlling I/O processing and script execution characteristics, managing the stack, executing immediate commands, and checking for the existence of host command environments. This table lists the commands by their functional area:

Functional Area	Commands
Controlling I/O processing	EXECIO
Control script execution characteristics	EXECUTIL
Stack services	MAKEBUF, DROPBUF, QBUF, QELEM, NEWSTACK, DELSTACK, QSTACK
Check for existence of host command environments	SUBCOM
Immediate commands	HE, HI, HT, RT, TE, TS

Many of these commands duplicate functionality of the VM command environment, such as the stack services, the immediate commands, and the EXECIO command for input/output.

Here is a complete list of the commands along with descriptions of how they are used:

TSO/E Rexx Command	Use
DELSTACK	Deletes the most recently created stack and all its elements
DROPBUF	Drops the most recently created stack buffer
EXECIO	Controls and performs data set I/O; employs either the stack or stem variables for the I/O.
EXECUTIL	Changes script execution characteristics
не	Halt execution; immediately halts the script
HI	Halt interpretation; immediately halts script interpretation
HT	Halt typing; immediately suppresses a script's terminal output
MAKEBUF	Creates a new buffer on the stack
NEWSTACK	Creates a new data stack (hiding the current data stack)
QBUF	Returns the number of buffers on the stack
QELEM	Returns the number of data stack elements in the most recently created stack buffer
QSTACK	Returns the number of data stacks for a script
RT	Resume typing; continues or resumes a script's terminal output
SUBCOM	Tells whether a specified host environment exists
TE	Trace end; immediately ends tracing
TS	Trace start; turns on tracing

These TSO/E commands are not Rexx functions, nor are they regular operating system commands. They are special operating system commands that can only be run from with Rexx scripts.

Code them in the same manner that scripts issue commands to the operating system. For example, this series of commands manipulates buffers and shows how Rexx scripts issue commands:

```
"MAKEBUF" /* create one buffer */
"MAKEBUF" /* create a second buffer */

"DROPBUF" /* delete the second buffer */

"QBUF" /* ask how many buffers we have */

SAY 'The number of current buffers is:' RC /* displays: 1 */
```

Here is a similar example that issues some of the stack commands. Note that stacks differ from buffers in that one already exists prior to issuing the first NEWSTACK command:

TSO/E programming services

OS/TSO provides a range of extended "programming services" available to Rexx scripts. These are OS-and TSO-specific services that are typically used for controlling aspects of the mainframe environment or in using its facilities and subsystems.

The services available to Rexx scripts depend on the address space in which they run. Available services further depend on whether the scripts are run in the *foreground* (interactively) or in the *background* (as a noninteractive batch job).

These topics become very OS-specific and extend beyond the scope of this book. Please see the main-frame Rexx reference manuals for information on programming services and interfaces. Appendix A tells how to freely download them.

Mainframe Rexx and the Language Standards

Both VM and OS TSO/E Rexx conform to the TRL-2 Rexx language standard. There are a very few minor differences between VM and OS Rexx and the TRL-2 standard, which we'll discuss momentarily.

In contrast, mainframe Rexx doesn't quite conform to the newer ANSI-1996 standard. Like many of the free and open-source Rexx interpreters available on other platforms, mainframe Rexx falls short of including all the ANSI-1996 features.

First, let's discuss how mainframe Rexx conforms to the TRL-2 standard. Scanning the VM Rexx manuals, we were unable to find any TRL-2 standard feature or function that VM/CMS Rexx lacks.

In contrast, TSO/E Rexx differs in several small ways from TRL-2. One minor difference is that TSO/E Rexx lacks the NOTREADY condition. Another key difference is that TSO/E Rexx does not include the standard Rexx I/O functions in the core language. Recall that these standard I/O functions are CHARS, CHARIN, CHAROUT, LINES, LINEIN, LINEOUT, and STREAM. These functions are all available to OS programmers through the external function package commonly called the *Stream I/O Function Package*. IBM documents it in their manual, *IBM Compiler and Library for REXX on IBM Z*.

VM and TSO/E Rexx developers thus have a choice between the "traditional" mainframe I/O model supported by the EXECIO command, and the standard Rexx I/O model. EXECIO is widely used and understood and fits well with mainframe file systems and allocation methods. Standard Rexx I/O is simpler, portable, and conforms to the Rexx standard. Developers can use either model, or both, as they choose. The two may be intermixed within scripts.

While VM and OS Rexx conform to the TRL-2 standard, they lack the features introduced by the ANSI-1996 standard. Let's briefly list of these missing elements:

☐ Instructions — A couple standard instruction keywords are missing. They include:	
	ADDRESS — Does not support ANSI-1996 keywords INPUT, OUTPUT and ERROR — Command I/O is always through the stack.
	SIGNAL — No LOSTDIGITS condition for error trapping
Functions — Mainframe Rexx does not support the new ANSI-1996 string functions CHANGESTR and COUNTSTR. The TIME function allows only a single argument and does not support the ANSI-1996 conversion features. The DATE function supports date conversions does not appear to strictly conform to the ANSI-1996 definition.	
this	dition Trapping — The new ANSI-1996 condition trap LOSTDIGITS is absent. Recall that exception condition is raised when the loss of significant digits occurs during equation.

In summary, both VM/CMS and TSO/E Rexx meet the TRL-2 standard, but omit most of the ANSI-1996 standard's additions. This fits right in with the majority of free and open-source Rexx interpreters, most of which follow the same pattern at the time of writing.

Interfaces

Since IBM declared Rexx its official *command procedures language* (or scripting language), the company has interfaced or integrated practically every one of its other products into Rexx. Many different subsystems can be programmed with Rexx. Rexx has become the general-purpose default programming language for interfacing to and controlling mainframe services.

Here is a partial list of some of the Rexx mainframe programming interfaces:

Mainframe Rexx Programming Interfaces
EXEC interface
CMS assembler macros and functions
CP assembler macros (such as IUCS and APPC/VM)
Group Control System or GCS interface and GCS assembler macros
Callable service library routines (CSL routines)
OS and VSE simulation interfaces
CP DIAGNOSE instructions
Interface into some VM control blocks
CP system services
Data record formats intended for processing by applications (e.g.: accounting records)
Calls to Rexx scripts from programs written in languages like Assembler, C, COBOL, FORTRAN, Pascal, and $\rm PL/I$
Rexx Exits — these allow applications to tailor the Rexx environment
XEDIT editor — you can write editor macros in Rexx
Interactive System Productivity Facility Editor (the ISPF Editor)
Interactive System Productivity Facility Dialog Manager (ISPF Dialog Manager)
address cpicomm—calls program-to-program communications routines that participate in the Common Programming Interface (CPI)
CPI Resource Recovery Routines
Netview — customization using Rexx
address openvm—invokes OPENVM routines
Rexx Sockets — a full set of functions and API to interface to TCP/IP
Customer Information Control System, or CICS — Customer Rexx offers easier programming with this teleprocessing monitor
VSAMIO interface to manipulate VSAM files (ESDS, KSDS, and RRDS)
VM GUI interface
MQ-Series Rexx interface
Information Management System or IMS Rexx interface (also called the DL/I Interface)
DB2 UDB SQL programming and database management and administration interfaces
Command environments CPICOMM, LU62, APPCMVS, CONSOLE, ISPEXEC, and ISREDIT

Describing these interfaces and showing how to use them is beyond the scope of this book (indeed, of any single book!). The point is that you can interface Rexx to almost any tool, language or facility under VM, OS or VSE. Rexx is the lingua franca of the modern mainframe. See the IBM documentation in Appendix A on resources for more information.

Rexx's dominance is such on mainframes that many third-party vendors also use the language in their products. For example, the setup and installation scripts for products may be coded in Rexx. Or, the products may support a Rexx scripting interface for customers. Candle Corporation's performance monitoring and automated operations products exemplify this trend. From the vendor's standpoint, of course, Rexx makes a nice fit. It is ubiquitous on mainframes and every customer will have it installed. Customers can be assumed to have Rexx expertise. The language is a powerful enough general-purpose language that it can accomplish any task. Yet it is an easy language to decipher if a customer has to understand the vendor's scripts.

Sample Scripts

Let's look at a few simple scripts to illustrate aspects of mainframe scripting. The scripts are from the VM environment and were developed and tested under various releases of that operating system. The purpose of these scripts is to demonstrate a few of the basic techniques of mainframe Rexx programming. To this end, we demonstrate how to issue VM's CMS and CP commands, how to retrieve operating system command output from the stack, how to send input to OS commands through the stack, and how to use the EXECIO command for file I/O. These sample scripts highlight a few of the typical techniques one would use in mainframe Rexx scripting. We've kept these scripts bare bones to hone in on the mainframe-specific aspects. So, we purposely exclude error checking, analyzing return codes, and the other essentials of robust, real-world scripts.

Let's take a look at the first sample script. Under VM, scripts can issue CMS commands or CP commands (among others). This script demonstrates how. In VM environments, CMS commands are those issued as if they came from the interactive command line, while CP commands control various aspects of the environment or one's virtual machine. By default, Rexx scripts send non-Rexx commands to CMS. Prefacing a command with the letters CP sends it to CP.

This sample script illustrates how scripts issue both CMS and CP commands. It links to another user's A-disk. To run the script, the user enters the userid of the other user, a virtual address for the device, and a disk letter. Here's the script:

```
/* This Exec links to another user's A-disk
//
/* Enter: LINKTO userid vaddr diskletter
// Example: LINKTO ZBPD01 201 E

arg userid vaddr diskletter .

if diskletter = "" then
    say 'Wrong number of arguments, error!'
else do
    cp link to userid 191 as vaddr r
    access vaddr diskletter
end
```

To run this script, the user enters a line like this: linkto ZBPD01 201 E

The script starts by reading the user's input parameters through the arg instruction. If the correct number of input arguments appear to have been encoded, the script issues the CP link command to link to the other user's minidisk in this line of code. The letters cp ensure that the command is sent to CP for execution:

```
cp link to userid 191 as vaddr r
```

This statement issues the CMS access command to make the minidisk accessible:

```
access vaddr diskletter
```

This simple example shows how scripts issue both CMS and CP commands. But it differs from many of the scripts you'll encounter in mainframe environments in one important way. We've written this script in the same style as most of the other scripts in this book. The mainframe has its own stylistic traditions and conventions. These are not required by any means, but they tend to reflect how mainframe Rexx scripts differ from those on many other platforms. When encoding operating system commands, mainframe developers often:

- ☐ Encode OS commands in uppercase
- ☐ Enclose all hardcoded (unevaluated) portions of commands in quotes
- ☐ Use double-quotation marks rather than single quotation marks
- Encode the address instruction to directly send commands to the desired environment

For example, we coded the two key commands in the preceding script like this:

```
cp link to userid 191 as vaddr r access vaddr diskletter
```

While individual styles vary, many mainframe professionals would code the same two lines like this:

```
ADDRESS CP "LINK" userid "191 AS" vaddr "R"
"ACCESS" vaddr diskletter
```

The address CP instruction sends the LINK command directly to CP for execution. The capitalization and double-quotation marks visually separate the hardcoded portions of OS commands from the substitutable variables encoded in the statements. Some mainframe professionals prefer to capitalize both commands and variables, as in this example:

```
ADDRESS CP "LINK" USERID "191 AS" VADDR "R"
"ACCESS" VADDR DISKLETTER
```

When viewing these different ways to encode these two statements, remember that the difference is mainly stylistic. The rules on how Rexx determines whether or not to send command strings to external environments, whether or not it evaluates expressions in those commands and performs variable substitution, and the uppercasing of command strings is exactly the same in mainframe Rexx as in all other standard Rexx interpreters. Hopefully, ardent mainframers will forgive the author if he remains consistent with the rest of this book and continues its lowercase, minimal quotation mark style in the upcoming examples.

Let's move on to the next sample script. This sample script shows how programs typically interact with operating system commands through the external data queue, or stack. This script issues the CMS identify command, from which it retrieves a line of information about the environment. The script accesses this line from the stack and displays the output to the user:

The script issues the CMS identify command through this line. The stack option directs CMS to place the command's output on the stack:

```
'identify (stack lifo'
```

The script then retrieves a line of output from that command off the stack through a pull instruction:

```
pull userid at node via rscsid date time zone day
```

The script concludes by displaying the various items of information to the user.

Many other CMS commands besides the identify command can place their output onto the stack for script processing. Here are a few others:

CMS Command	Use
EXECIO	Uses the stack for a variety of input/output operations; can execute CP commands and collect their output into the stack
IDENTIFY	Retrieves the user ID, node name, and other environmental information
LISTFILE	Retrieves file information
NAMEFIND	Retrieves communications information from the names file
QUERY	Retrieves information about CMS status

Here is another example of how scripts can use the stack. In this case, the script acquires a minidisk for an interactive user and then issues the format command to format the disk for use. The format command,

of course, requires several input parameters. The script provides these parameters (or subcommands) by placing them on the stack *prior* to issuing the format command. That command then reads these input parameters from the stack. Here is the script:

This script first specifies the minidisk characteristics with the CP define command. Then, it places the words YES and TDISK onto the program stack via the queue instruction. So, when the subsequent format command asks whether to format the disk, it reads the word YES from the stack, and when it prompts for a minidisk label, it reads the word TDISK from the stack. In this way, the program issues a CMS command and provides input to the command through the program stack. It issues what are often called *subcommands* to the CMS format command using the stack as its communications vehicle.

The next sample script retrieves a list of files, sorts it, and presents the sorted list to the user. Here is the program:

```
/* This procedure lists 'script' files sorted by size, smallest to */
/* largest. */
makebuf

'listfile * script a (exec date'

push 47 51

set cmstype ht
sort cms exec a sortlist exec a
set cmstype rt

type sortlist exec a
dropbuf
exit 0
```

This program first creates its own stack buffer, through the makebuf command. This ensures that the program works only with its own memory area.

After the CMS listfile command retrieves a list of files, the script issues the set cmstype ht command to ensure that the sort command does not prompt the user to input the sort positions used in sorting the CMS EXEC file. Instead, the script inputs the sort positions desired through its push instruction. After suppressing any prompt from the sort command, the script resumes display output by the set cmstype rt command. Finally, the script displays the sorted file list on the screen, and concludes by dropping the stack buffer it created when it started.

This is our second sample script that feeds input into an external command via the stack. This table lists a few common CMS commands which accept stack input:

CMS Command	Use
EXECIO	Uses the stack for a variety of input/output operations
COPYFILE	With the specs option, reads stack information that specifies how the copy is to occur
FORMAT	Requires input for formatting a minidisk
SORT	Requires input information in sorting a file

The final sample script illustrates the execio command, the CMS command that reads and writes lines to and from disk, the stack, or other virtual devices. It is very common to see mainframe scripts use the execio command instead of the standard Rexx I/O functions. This script simply prompts the user to enter lines via his or her keyboard. It then writes these lines to disk, and reads and displays them back to the user. This script has little practical value, but it does illustrate how mainframe scripts often use the execio command as a basic vehicle for I/O. Here is the script:

```
This procedure prompts the user to enter lines, then writes them to
   a disk file by EXECIO. It then reads all the lines back via EXECIO
   and displays them to the user on his or her display screen.
/*
   If the file already exists, the input data is appended to it.
/*
   Enter: INOUT fn
                            ft
   Example: INOUT NEWFILE DATA
arg fn ft.
                                             /* clean up the environment */
conwait
desbuf
   Access input lines and write them to the disk file
say 'Enter lines of data, enter a null line when done'
parse pull line
do while line \= ''
   'execio 1 diskw' fn ft a '(string' line
   if rc \= 0 then say 'Bad RC on file write:' rc
   parse pull line
```

```
end
finis fn ft a

/* Read the file lines back and write them to the user's display. */
say 'The following is typed courtesy of EXECIO reads:'
'execio 1 diskr' fn ft a
do while rc = 0
    parse pull line
    say line
    'execio 1 diskr' fn ft a
end

if rc \= 2 then say 'Bad RC on file read:' rc
finis fn ft a
exit 0
```

The two new lines in this script are those that write and read a disk file via the execio command. Here is the write statement:

```
'execio 1 diskw' fn ft a '(string' line
```

And, here is the statement that reads the lines from the disk:

```
'execio 1 diskr' fn ft a
```

In both cases, notice that the script explicitly closes the file after it is done using it through the CMS finis command:

```
finis fn ft a
```

Of course, mainframe Rexx for VM supports all the standard Rexx I/O functions and instructions, such as chars, charin, charout, lines, linein, and lineout. So, why would one use the execio command? In a word: compatibility. Many mainframe scripts are legacy systems, which were written using execio and other mainframe-only commands. Some programmers like the way execio fits with mainframe file system concepts, such as file allocation with blocking and record length specifications. Too, TSO/E Rexx only supports execio,unless your system has the Stream I/O package installed. Either I/O approach works fine, so use whichever you feel best fits your needs.

This concludes the sample mainframe scripts. Please see the mainframe manuals for further information. The two IBM user's guides offer good introductory tutorials for mainframe Rexx scripting. See the *REXX/VM User's Guide, SC24-6114* and its equivalent for z/OS, the *TSO/E REXX User's Guide, SC28-1974*. The section entitled "Further Information" lists some other good sources of information on mainframe Rexx programming.

Migrating Mainframe Scripts to Other Platforms

Many mainframe shops are rehosting their programs on downsized platforms. Some of the alternatives include Windows, Linux, and Unix. The goal is usually to reduce platform costs, although sometimes the goal is to redistribute machine resources or migrate to a new platform for strategic reasons.

To port mainframe Rexx scripts, follow the recommendations in Chapter 13 on portability. Code within the Rexx standards. Avoid mainframe Rexx extensions (for instructions and internal and external functions). Avoid using nonportable interfaces for databases, screen I/O and the like. Limit the number of operating-system-specific commands scripts issue. Isolate OS-specific instructions to their own routines when you must code them, or include logic that figures out which platform the script is running on and issue the appropriate OS commands based on that.

Of course, rehosting means working with legacy code. As far as following these portability suggestions, it's often too late — the deed is done, the code already exists. The real question is: how do you port existing scripts?

The first step in porting legacy code is to identify the kinds of machine-specific Rexx code we mention here. This can be a slow, manual process, requiring skilled personnel to look through the scripts to rehost.

Sometimes it is possible to speed the process and increase its accuracy by writing a Rexx script to scan the migrating scripts. This script identifies potential problems simply by printing the lines and/or line numbers in which nonportable code occurs. The script would scan for the extended language features of mainframe Rexx listed above. These would include mainframe-specific:

Instructions
Functions
External functions
Commands
Interfaces
I/O (such as the EXECIO command)
"Not" symbol ¬
Coding that depends on the EBCDIC character encoding scheme
The Double-Byte Character Set

Computer-assisted rehosting through a scanning script can be faster and more accurate than manual script rewrites. Different Rexx interpreters offer different degrees of compatibility with mainframe Rexx. If you are rehosting mainframe scripts, pick an interpreter that has extensions that support mainframe Rexx features. Whatever approach you take, the scope of the porting effort ultimately depends on the degree to which the scripts employ mainframe-only Rexx features.

Applying Your Rexx Skills to Other Platforms

Another aspect of migrating to a new platform concerns how much training personnel require to make the change. Rexx presents a major benefit. Mainframe professionals almost always know Rexx or are familiar with it. The strong Rexx standard and the language's ease of use give mainframers a tool that they can immediately use in their new environment. Instead of learning an entirely new language that mainframers most likely do not use (like Perl, the Unix shell languages, or Python), Rexx presents a point of commonality between the mainframe and the new platform. Leveraging Rexx lessens training needs and reduces the impact of migrating to the new environment. Mainframers who know Rexx can be instantly productive on any new platform simply by installing and using free Rexx.

"Skills portability" works in both directions. Few colleges today teach their computer science students about mainframes. Rexx presents a point of commonality whereby those who know it on Windows or Linux also know the language of mainframe scripting. Knowing how to script Rexx on Windows or Linux provides an immediately usable mainframe skill and provides an "access point" to the mainframe environment for these individuals.

Further Information

There are many good sources of additional information on mainframe Rexx scripting. We've already mentioned the key IBM manuals in this chapter. You can download them for free from www.RexxInfo.org. Appendix A lists some other online sources for further information on mainframe Rexx, including Web-based discussion groups where you can post questions and interact with peers.

Most mainframe Rexx books were published years ago, yet they are still quite useful today. You can download many of them for free from www.RexxInfo.org. Others can easily be purchased through an online used book site, such as www.amazon.com. Some good titles to look for include The Rexx Handbook (G. Goldberg, McGraw-Hill, ISBN 0070236828), Programming In REXX (C. Daney, McGraw-Hill, ISBN 0-07-015305-1), REXX in the TSO Environment (G. Gargiulo, QED, ISBN 0-89435-354-3), Rexx: Advanced Techniques for Programmers (P. Kiesel, McGraw-Hill, ISBN 0070346003), and REXX Tools and Techniques (B. Nirmal, QED, ISBN 0894354175).

Summary

This chapter summarizes some of the extended features of IBM mainframe Rexx. The goal was to give you background in case you need to:

Transfer your skills across mainframe and other platforms
Port or rehost scripts between mainframes and other platforms
Assess the differences between free and mainframe Rexx implementations
Assess the differences between mainframe Rexx and the ANSI Rexx standard

The chapter concentrates on VM and OS TSO/E Rexx. If you are interested in VSE Rexx, please see the resources listed in Appendix A.

This chapter also describes a few of the many interfaces with which Rexx interacts in the mainframe environment. IBM has long sought to leverage Rexx as its scripting language across all its mainframe tools and interfaces. On mainframes Rexx is truly a universal language that interfaces to all tools and products.

Test Your Understanding

- **1.** What language standards does mainframe Rexx meet? What manual should you obtain if you want to know the details of IBM's SAA command procedure language specification?
- **2.** What extra instructions does IBM mainframe Rexx add over the ANSI-1996 standard? What functions does it add? What features of the ANSI-1996 standard are missing from mainframe Rexx?
- **3.** What is the Double-Byte Character Set, and why would you use it? Does mainframe Rexx support DBCS?
- **4.** What are the extensions mainframe Rexx brings to file I/O? What functions support this?
- **5.** What are CMS *immediate commands*, and how are they used when running scripts?
- **6.** What are mainframe *function packages*, and how are they used from within scripts?
- **7.** What is the advantage to a Rexx compiler? When do you typically compile a Rexx script?
- **8.** What should you encode as the first line of a mainframe Rexx script?
- **9.** What are the VM file types for Rexx scripts?

NetRexx

Overview

NetRexx is an object-oriented Rexx-like language designed to bring the ease of use associated with Rexx to the Java environment. It can be used wherever you might otherwise employ Java. This includes server-side Java, in the form of *servlet programming* and dynamic *Java Server Pages*. You can even write *Java Beans* in NetRexx, components that fit into Java's reusable component architecture.

NetRexx scripts compile into Java byte code. They seamlessly use Java classes and create classes that can be used by either Java or NetRexx programs. NetRexx offers an alternative language in the Java environment, one that can be intermixed in any manner and to any degree with Java programs. The goal is to bring the ease of use, maintainability, and reliability of Rexx to the Java environment.

NetRexx is not a superset of classic Rexx. In this it differs from object-oriented Rexx interpreters like the Rexx Language Association's Open Object Rexx. But NetRexx is similar enough to classic Rexx that programmers can pick it up quickly. To port classic Rexx scripts to NetRexx, use a utility like *Rexx2Nrx*, the free classic Rexx to NetRexx automated conversion tool.

This chapter briefly summarizes the purpose and highlights of the NetRexx language.

Why NetRexx?

NetRexx is very different in its goals as opposed to either classic or object-oriented Rexx interpreters. Let's look at the language's key advantages:

☐ Ease of use and productivity — NetRexx brings the ease of use and productivity associated with Rexx to the Java environment. NetRexx is clear, powerful, and simple.

Java integration — NetRexx seamlessly integrates into the Java environment. NetRexx scripts use Java classes and can be used to create classes used by Java programs. You can write Java Beans in NetRexx. NetRexx also supports server-side development.
Portability — Any platform that runs Java runs NetRexx. Like Java, NetRexx provides machine- independence through the Java Virtual Machine, or JVM.
<i>Scripting</i> — NetRexx supports traditional scripting — quick, low-overhead coding — in Java environments. NetRexx automatically creates a class with a main method so that you can code simple scripts without overhead.
The Java alternative — NetRexx fits into the Java environment and provides a fully compatible language alternative. NetRexx requires fewer keystrokes than Java and eliminates Java's C-heritage syntax. NetRexx can generate formatted Java code, including original commentary, if desired.
Easy migration — Whether you're migrating classic Rexx scripts or transferring your skills, NetRexx eases migration into the Java environment.
Flexibility — The NetRexx translator can be used as a compiler or an interpreter. As an interpreter, it allows NetRexx programs to run without needing a compiler or generating .class files. NetRexx programs can be both compiled and interpreted in just one command. This is easy to do and machine-efficient.

Do You Have to Know Java to Use NetRexx?

To install NetRexx, the need for Java background is minimal. It's quite simple to download and install Java on almost any machine, whether or not you know Java. The process is similar to that of any other download and install. The package contains complete instructions on how to install NetRexx in the Java environment for most major operating systems.

NetRexx runs in the Java environment and NetRexx programs compile into Java byte code. It helps to know the role of components like the Java Runtime Environment, or JRE, and the Java Development Kit, or JDK. Java should be installed on the machine in order for NetRexx to compile and run.

The big question is: are you familiar with the *Java class libraries*? These are the modules of reusable code that come with Java and provide its power. Java and NetRexx are both object-oriented programming languages. NetRexx can be used as a simple scripting language, but leveraging the true power of the product means becoming familiar with the reusable code supplied in the Java class libraries. NetRexx uses Java class libraries; it does not come with its own or supply alternatives.

For example, if you want to create a NetRexx script with a graphical user interface, you would typically use the prebuilt components of the Java class library. NetRexx does not provide its own GUI; it allows you to leverage what Java already supplies.

Java classes you might use in NetRexx scripts include those for I/O, utilities, GUIs, images, TCP/IP connections, and wrappers. Java's collection classes are especially useful. Similar in function and purpose to the collection classes of the object-oriented Rexx interpreters, these provide for lists, maps, iterators, sorting and searching algorithms, and the like.

NetRexx is object-oriented. You need to know or learn object-oriented programming, just as you need to learn about the available class libraries. If you are comfortable with object-oriented programming (OOP) from Open Object Rexx or roo!, that's great. Experience with any other object-oriented programming language also provides a good background.

If you know classic Rexx, NetRexx is a good vehicle by which to learn about the Java environment and pick up object-oriented programming. For example, if you work on mainframes and your site adopts Java, NetRexx presents a nice vehicle by which you can easily segue into the new environment and OOP. NetRexx is an easier entry point into the Java environment than Java, due to its simpler syntax and likeness to classic Rexx.

While one typically thinks of NetRexx programming as object oriented, the latest versions do also offer *scripting mode* for procedural programming.

Downloading and Installation

To use NetRexx, you must first install Java on your computer. Java is free and downloadable from many sources on the internet. Perhaps the best spots are its official home at Oracle Corporation, at www.oracle.com, or the Java website at www.java.com.

The latest versions of NetRexx come with the Eclipse Java compiler included. But you may find it preferable to download a full software development toolkit, like the Java Development Toolkit (or JDK), or its open source equivalent, the OpenJDK. We recommend installing the toolkit, if space permits. The install is simple, and you'll have all the components you might want.

You can check to see if Java is already installed on your machine, and also verify its version, by this statement:

```
java -version
```

NetRexx requires an operating system that supports long filenames.

After installing and verifying that you have a valid Java environment, download and install NetRexx. NetRexx is freely downloadable from the Rexx Language Association. Go to their website at www.RexxlA.com. Or go directly to the NetRexx website at www.NetRexx.org.

The download includes a file containing the license terms you agree to by using NetRexx. It also contains a file named something like read.me.first that gives simple installation instructions.

The download comes with all the key NetRexx manuals. Start with the *NetRexx QuickStart Guide*. This contains complete installation instructions, as well as a very simple introduction to the language. Also included for further information are the *NetRexx Programming Guide* and the *NetRexx Language Reference*.

In a nutshell, the steps for installing NetRexx are:

- **1.** Decompress the NetRexx download file into an appropriate directory
- 2. Make the NetRexx translator visible to the Java Virtual Machine, or JVM, by adding the lib\NetRexxC.jar or lib\NetRexxF.jar file to the JVM's CLASSPATH environmental variable. Also add the '.' directory (the current directory).
- 3. Update the PATH variable to include the \NetRexx\bin directory.
- **4.** Test the install by running these commands exactly as given:

```
java COM.ibm.netrexx.process.NetRexxC hello
java hello
```

The first command runs the NetRexx compiler, which translates the NetRexx test script named hello.nrx into a Java program hello.java. Then the Java compiler javac automatically compiles the Java program into the binary class file named hello.class. The second command runs the program in the hello.class file, which displays: hello world!

Ways to Run NetRexx Programs

Once the environment is completely set up, there are several ways you can translate and run NetRexx scripts. For example, you can perform the script-translation and execution operations as separate steps, or you can run translate, compile, and run a NetRexx script in a single command. To get an understanding of what the NetRexx translator does, let's look at the multi-step approach first. From the operating system's command line, perform these actions:

Create a source file containing the NetRexx script (such as hello.nrx), and run the NetRexx translator against the NetRexx source script:

NetRexxC hello

or

nrc hello

2. Execute the program:

java hello

As an alternative approach, here is how to translate, compile, and run a NetRexx source script in a single command:

```
nrc -run hello
```

Keep in mind that Java development is case-sensitive. So this statement:

```
nrc -run HELLO
```


is not the same as:

nrc -run hello

This might come as a surprise to developers used to the Windows operating system and classic Rexx. Neither of these environments recognizes case differences.

Figure 30-1 pictorially summarizes the multi-step process of converting a NetRexx source script into a runable module.

Developing and Running NetRexx Scripts

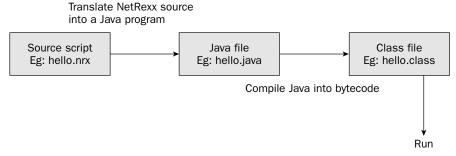

To translate, compile and run in one step enter: nrc -run hello

Figure 30-1

Features

This section describes ways in which NetRexx differs from classic Rexx. This goal is to give you an idea of what NetRexx offers and how it extends classic Rexx into the world of JVM-based, object-oriented programming.

Figure 30-2 summarizes what NetRexx adds beyond classic procedural Rexx and indicates some key differences between the two.

NetRexx Goes Beyond Classic Rexx...

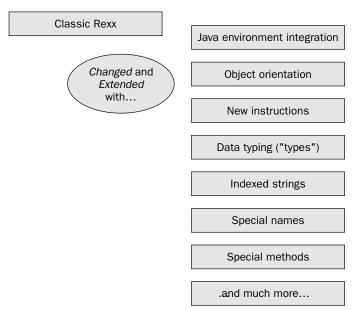


Figure 30-2

Let's discuss how NetRexx differs from classic Rexx in detail. Remember that NetRexx is not a superset of classic Rexx, but rather an entirely different, "Rexx-like" language that goes beyond standard Rexx and expands it into the world of Java.

First, NetRexx supports all object-oriented programming principles:

- ☐ Inheritance
- ☐ Abstraction
- □ Encapsulation
- □ Polymorphism

Methods are named routines or groups of instructions. They are always grouped into *classes*. Classes can be grouped into *class* libraries called *packages*. The variable definitions within classes are called *properties*.

The name and list of arguments for invoking each method is its *signature*. Overload operators by invoking the same method with different signatures. This ability to execute different code when referring to the same method name is also referred to as *polymorphism*.

NetRexx adds instructions for object-oriented programming. It also adds new instructions to provide "convenience features" beyond what's in classic Rexx. The new or enhanced instructions include:

New or Enhanced Instruction	Use
class	Defines a class
do	Enhanced with several new keywords:
	$\label{eq:protect} \begin{tabular}{ll} \tt protect gives the do loop exclusive access to an object \end{tabular}$
	$\verb"catch" and finally Java-style" exception handling$
import	Simplifies references when using classes from other packages.
loop	The new instruction for looping. It includes catch and finally for Java-style exception handling.
method	Defines a method within a class.
options	New options are introduced, including one for faster binary arithmetic.
package	Defines the package to which class(es) belong.
properties	Defines the attributes of <i>property</i> variables, variables defined within classes.
select	Enhanced with several new keywords:
	protect — gives the construct exclusive access to an object
	catch and finally—Java-style exception handling
trace	Enhanced for OOP by the methods keyword.

All NetRexx values have associated *types*. For example, NetRexx strings are of type *Rexx*, which defines string properties and the methods that apply to them. NetRexx provides built-in methods for *Rexx* strings, which largely correspond to the functions of classic Rexx. NetRexx implementations may also provide *primitive types* such as boolean, char, byte, short, int, long, float, and double, and *dimensioned types*, or arrays. NetRexx automates *type conversions* whenever necessary in order to simplify programming.

In its addition of data typing, NetRexx departs from classic Rexx in order to be more Java-oriented. NetRexx is similar to Java in other ways, too. For example, array sizes must be declared in advance, and a new feature called the *indexed string* supports the associative array of classic Rexx. And NetRexx's exception handling is modeled on the Java catch . . . finally construct. Let's continue with the language description, and you'll discover other similarities between NetRexx and Java, as well.

Chapter 30

Indexed strings are NetRexx strings by which subvalues are identified by an index string. This example shows how indexed strings work:

Multiple indexes create a hierarchy of strings. This can be used to create associative arrays or dictionary structures. Multiple indexes are referred to using comma notation:

Arrays are tables of fixed size that must be defined before use. Arrays may index elements of any type, and the elements are considered ordered. Arrays can be single or multidimensioned. Elements are referenced by a bracket notation similar to that of indexed strings. Here's sample code that defines an array, then refers to elements within it:

```
my_array = int[5,10] -- defines a 5 by 10 array of INT type objects
my_array[2,3] = 15 -- sets the value in array position '2, 3'
subb = my_array[2,3] -- sets variable SUBB to the value of array position '2, 3'
```

NetRexx includes a number of *special names* and *special methods* for commonly used concepts. For example, the ask special name reads a line from the user and returns it to the script as a string of type *Rexx*. Here are the special names:

Special Name	Use
ask	Reads a line from the default input stream and returns it as a string of type <i>Rexx</i> (also called a <i>NetRexx string</i>)
digits	Returns the current setting of numeric digits as a NetRexx string
form	Returns the current setting of numeric form as a NetRexx string
length	Returns an array's length (the number of elements)
null	Returns the null value (used in assignments and comparisons)
source	Returns a NetRexx string that identifies the source of the current class
super	Used to invoke a method or property overridden in the current class

Special Name	Use	
this	Returns a reference to the current object	
trace	Returns the current setting as a NetRexx string	
version	Returns the NetRexx language version as a NetRexx string	

The special methods are used to refer to particular objects:

Special Method	Use	
super	Constructor of the superclass	
this	Constructor of the current class	

NetRexx introduces back-to-back dashes for comments (--), and the continuation character for coding across lines is the single dash (-). By "dash" we mean the same character called a hyphen.

Sample Programs

Serious NetRexx scripting is beyond the scope of this book because it explores Java classes and methods more deeply than appropriate here. Nevertheless, here are a two very simple sample scripts. These will at least help you get started with NetRexx. The first example shows how to create a simple NetRexx application, while the second illustrates how to create a class with a few methods.

The script we named Squared simply prompts the user to enter numbers, which the script squares and displays. Here is a sample interaction with the squared.nrx script:

```
babcock@dell1:~/Desktop/nrx/examples$ nrc -run squared
NetRexx portable processor 4.06-GA build 152-20240304-0612
Copyright (c) RexxLA, 2011,2024. All rights reserved.
Parts Copyright (c) IBM Corporation, 1995,2008.
Program squared.nrx
Compilation of 'squared.nrx' successful
Running squared...
Please enter a number to square...
2
4
Please enter a number to square...
2.3
5.29
Please enter a number to square...
exit
```

The following command translates, compiles, and runs the squared.nrx script.

```
nrc -run squared
```

The first line the script displays is its prompt:

```
Please enter a number to square...
```

The script continues prompting the user and displaying the squares of the numbers he or she enters until the user enters the keyword:

```
exit
```

Here is the code of the script:

The first line of the script illustrates the new NetRexx loop instruction:

```
loop label square it forever
```

loop is very similar to the do instruction in classic Rexx. It has many of the same keywords including while, until, for, to, by, and forever. It also has some new keywords, such as catch and finally, which implement Java-like error catching.

loop refers to a label name, which matches the label on the matching end keyword. In this code, the label's name is square it:

```
loop label square_it forever
.
.
end square it
```

The prompt in this script employs the new ask *special name*. ask reads a line from the default input stream and returns it as a string of type *Rexx* (also called a *NetRexx string*):

```
say 'Please enter a number to square...'
the_number = ask
```

As the_number is an instance of the NetRexx string object, it has many methods that correspond to the string-related built-in functions of classic Rexx, such as the dataype function. This statement invokes the dataype method on the_number to check if the_number is numeric, and squares the value if so:

```
when the number.datatype('n') then say the number * the number
```

This statement compares the NetRexx string to a literal value and terminates the script when the user inputs the string exit:

```
when the number = 'EXIT' then leave square it
```

This simple script shows that NetRexx includes new instructions that are incompatible with classic Rexx, yet are quite as simple to use. NetRexx retains the spirit of classic Rexx, but it is not upwardly compatible. To port classic Rexx scripts to NetRexx, use a utility like *Rexx2Nrx*, the free classic Rexx to NetRexx automated conversion tool.

Creating a Class

Here's a simple program called Oblong which is distributed with NetRexx as an example. The program displays the size of an oblong shape, then resizes it. Here's the driving NetRexx program, followed by its output:

```
bobs@dell1:~/Desktop/nrx/examples/quicktour$ nrc -run tryOblong
NetRexx portable processor 4.06-GA build 152-20240304-0612
Copyright (c) RexxLA, 2011,2024. All rights reserved.
Parts Copyright (c) IBM Corporation, 1995,2008.
Program tryOblong.nrx
Compilation of 'tryOblong.nrx' successful
Running tryOblong...
Oblong 5 x 3
Oblong 6 x 4
Oblong 1 x 2
bobs@dell1:~/Desktop/nrx/examples/quicktour$
```

Here's the code of the Oblong class. You can see its constructor method named <code>Oblong</code>, which is used to create a new oblong shape to work with. Methods <code>size</code> and <code>relsize</code> manipulate the sizing of the oblong object. And the <code>print</code> method simply displays it to the user:

```
/* Oblong.nrx -- simple oblong class */
class Oblong
 width
              -- size (X dimension)
             -- size (Y dimension)
 height
 /* Constructor method to make a new oblong */
 method Oblong (new width, new height)
   -- when we get here, a new (uninitialized) object has been
   -- created. Copy the parameters we have been given to the
   -- four properties of the object:
   width=new width; height=new height
 /* Change the size of a Oblong */
 method size (new width, new height) returns Oblong
   width=new width; height=new height
   return this
                    -- return the resized object
 /* Change the size of a Oblong, relatively */
 method relsize(rel width, rel height) returns Oblong
   width=width+rel width; height=height+rel height
   return this
 /* 'Print' what we know about the oblong */
 method print()
   say 'Oblong' width 'x' height
```

Summary

This chapter describes the purpose and features of NetRexx, a free Rexx-like language for developing applications, Java Beans, and servlets that run in Java environments. Rely on NetRexx to any degree you like in intermixing its classes with those of Java. Invoke Java class libraries from NetRexx scripts, and write class libraries and Java Beans in NetRexx. NetRexx fully integrates into the Java environment and offers a fully compatible language alternative.

We reviewed at a couple simple scripts that used NetRexx instructions like <code>loop</code>, <code>class</code>, and <code>method</code>, and the special name <code>ask</code>, as well as how to create a class you could use from either NetRexx or Java.

The major benefit of NetRexx is that it makes available Rexx's ease of use and high productivity in Java environments. Those who know Rexx can learn NetRexx quickly. NetRexx eases the transition into the Java universe and makes you more productive once you get there.

Test Your Understanding

- **1.** Why use NetRexx instead of Java? What are its advantages? Can you intermix NetRexx and Java classes within a single application?
- **2.** What are the NetRexx translator's interpreter and compiler functions? Why is it useful to have both? Can you compile and run a NetRexx script in one command? Is it always necessary to have the Java Virtual Machine available to run NetRexx scripts?
- **3.** Are NetRexx scripts portable? What is required to run them on different machines?
- **4.** What are indexed strings and arrays? Describe how they differ. If you wanted to define the equivalent of an Open Object Rexx dictionary collection class in NetRexx, how could you do it?
- **5.** How does NetRexx capitalize on the Java class library? Where can you learn what classes and methods are available in that library?
- **6.** What are the roles of files with these extensions: *.nrx, *.java, *.class.
- 7. What are special names and special methods?
- **8.** How do you migrate classic Rexx scripts to NetRexx?

Part III



Resources

RexxInfo.org

The website www.RexxInfo.org is your one-stop shop for all things Rexx. It is an open source website that offers all free resources including:

Downloads of all Rexx interpreters
Downloads of hundreds of free tools
Sample code (including the scripts in this book)
All Rexx manuals (including IBM manuals)
Quick look-up for functions, instructions, classes, and methods
How-to's and articles
Free downloads of many Rexx books
Links to all other sources for Rexy information

Rexx Language Association

The primary user group that addresses Rexx in all its forms is the Rexx Language Association. The "Rexx LA" is a nonprofit international organization with worldwide membership and is open to everyone. At the time of writing, membership is free.

The Rexx LA home page is at www.rexxla.org. The website provides much information on the Rexx language, including standards, FAQs, interpreters, tools, and the annual Rexx symposium. The Rexx Language Association supports a forum at https://groups.io/g/rexxla-members, which is a great place to ask questions and get answers from Rexx users worldwide.

The IBM users group SHARE also covers Rexx scripting and related topics. Find it at www.share. org. Branches of SHARE/GUIDE in Europe also cover Rexx.

Web Forums

Rexx supports several active forums and emailing lists. These allow you to post any questions you might have and also learn from the comments of others.

The Rexx Language Association's forum is at https://groups.io/g/rexxlamembers
The IBM Mainframe's Expert Forum section on Rexx is at https://ibmmainframes.com/forum-41.html
The ooRexx Developers Mail Archive is at https://www.mail-archive.com/oorexx-devel@lists.sourceforge.net/
Ask questions on ooRexx on SourceForge at its discussion group at https://sourceforge.net/p/oorexx/discussion/408478/
The NetRexx Group forum is at https://groups.io/g/netrexx
Ask questions on Regina Rexx at SourceForge at https://sourceforge.net/p/regina-rexx/discussion/88574/
Tek-Tips Rexx Forum is at www.tek-tips.com/threadminder.cfm?pid=277 or just access their home page at www.tek-tips.com and search on the keyword Rexx.
The searchable Mail Archive is at https://www.mail-archive.com/

The Rexx Standards

The Rexx Language, second edition, by Michael Cowlishaw (Prentice-Hall, 1990) is known as TRL-2, and it defines the TRL-2 standard. The first edition is known as TRL-1, and it defines the TRL-1 standard. You can download TRL-2 for free at www.RexxInfo.org.

The ANSI standard is entitled *Programming Language Rexx Standard X3.274-1996*, and is from the American National Standards Institute (X3J18 Technical Committee). It is available in draft form as a free download from www.RexxInfo.org. The final document is available for purchase from ANSI at their Web site www.ansi.org.

Rexx Home Page at IBM

The Rexx home page for IBM is at

https://www.ibm.com/docs/en/zos/3.1.0?topic=programming-rexx-language. Or just search for "Rexx" at www.IBM.com.

All IBM Rexx manuals can be downloaded either through IBM's website, or from www.RexxInfo.org.

Free Rexx Books

New Rexx Books

You can freely download any number of Rexx books from the www.RexxInfo.org website. Here is just a sampling of what's available: The definitive book on Rexx by its inventor, Michael Cowlishaw, The Rexx Language (2nd Edition), aka TRL-2. The book you are reading, Rexx Programmer's Reference, 2nd Edition by Howard Fosdick Programming In Rexx by Charles Daney The Rexx Handbook by Gabriel Goldberg and Philip H. Smith Rexx Quick Reference Guide by Gabriel Gargiulo NetRexx 2 by its inventor, Michael Cowlishaw Learn Rexx in 56,479 Easy Steps by Jeff Glatt All manuals for all Rexx interpreters All IBM Rexx and Rexx-related manuals

The Rexx Language Association is publishing several new Rexx books including:

Current Rexx LA President René Jansen is writing a new Rexx book yet to be titled

Introduction to Rexx and ooRexx, by Dr Rony G. Flatscher



Instructions

This appendix provides a reference to all Rexx instructions, as defined by the ANSI-1996 standard. It also points out the major differences in the instructions between the ANSI-1996 standard and the earlier standard defined by TRL-2. This appendix is intended as a quick reference guide for developers, so please see the full ANSI-1996 and TRL-2 standards if more detailed information is required. Appendix A tells where to obtain the two standards.

Each entry is in this appendix identified by the instruction name. Entries contain the template for the instruction, which shows its operands, if any. The template is followed by a description of the instruction and its use, as well as an explanation of the operands. Coding examples show how to code each instruction.

In reading the instruction formats, operands that may optionally be encoded are surrounded by brackets ([]). The "or" bar (|) represents situations where you should encode either one set of operands or the other. Let's look at the address instruction template as an example:

Brackets surround the command operand, so this means that its encoding on the instruction is optional. The same pertains to the VALUE keyword. Note that as a hardcoded keyword, VALUE appears in capital letters. The "or" bars vertically surround each of the two lines above, so you would code either one group of operands or the other. In this example, you would choose either one of these two basic formats in which to encode the address instruction:

```
ADDRESS environment [ command ]
ADDRESS VALUE expression
```

ADDRESS

address directs commands to the proper external environments for execution.

Appendix B

An address instruction with both environment and command coded specifies to which external environment that command is sent. An address instruction with an environment but no command specifies the default external environment for subsequent commands. An address instruction with neither environment nor command coded toggles the target environment between the last two specified or used.

The value format defines the target environment by way of the resolved expression for subsequent commands. value and command cannot be coded in the same statement. The purpose of the value format is to provide for programmability in determining the target environment for subsequent commands.

The environments that may be specified for command execution are system-dependent. You may use the address() function to find out what the current environment is.

Example

```
say address() /* displays the current command environment */
address system dir /* send DIR command to the SYSTEM environment */
address command /* send all subsequent commands to the COMMAND
environment */
'dir' /* 'dir' is sent to the COMMAND environment */
```

The ANSI-1996 standard added a new format for the address instruction. Here is the template for this new format:

```
[ environment ] [ command ] [ redirection ] ]
ADDRESS
            [ [ VALUE ] expression [ redirection ] ]
redirection is: WITH INPUT
                            input redirection
and/or:
               WITH OUTPUT output_redirection
and/or:
                WITH ERROR output_rediection
input_redirection is: [ NORMAL
                                  STREAM | STEM ] symbol
output_redirection is: [ APPEND |
                                 REPLACE ]
                           [ NORMAL | STREAM
    plus a destination:
                                                 STEM ] symbol
```

Optional extensions for the ANSI standard are fifo and lifo for the with input, with output and with error options.

Any, all or none of the three clauses with input, with output, and with error may be specified. They may be specified in any order. append or replace specify whether an output or error file will be appended to or over-written. replace is the default.

stream or stem specify whether an I/O stream or compound variable stem (an array) will provide the input or be written to as output or error. When using an array, element 0 should state the number of elements for input. Element 0 tells how many lines of output there are for output or error.

```
/* First, send an operating system SORT command to the SYSTEM environment.
    Use file sortin.txt for input with output going to file sortout.txt. */
address SYSTEM sort WITH INPUT STREAM 'sortin.txt' ,
```

ARG

```
ARG [template]
```

This instruction parses arguments in the template in the same manner as: parse upper arg [template].

arg automatically translates all input arguments to uppercase.

Example

```
/* function invoked by: testsub('a',3,'c') */
arg string_1, number_1, string_2
/* string_1 contains 'A', number_1 contains '3', string_2 contains 'C' */
```

CALL

```
name [expression] [, [expression]]... |

CALL | ON condition [ NAME trapname ] |

OFF condition |
```

call either invokes a routine or enables an error condition. If on is specified, call enables the error condition and optionally specifies the name of the exception routine that will be invoked when it is raised. The condition must be one of error, failure, halt, and notready. Specifying off disables an error condition.

If neither on nor off is specified, call invokes an internal, built-in or external routine. Coding the routine name in quotes prevents searching for an internal routine. Zero, one, or more expression arguments may be passed to the routine.

If the routine returns a result, the special variable result is set to that value. Otherwise result is set to uninitialized.

Example

DO

The do-end instruction groups multiple instructions together and executes them 0, 1, or more times. to, by, and for are optional and can be coded in any order. by expression_b is an increment that defaults to 1. for expression_f sets a limit for loop iterations if not terminated by some other constraint. forever defines an endless loop that must be terminated or exited by some internal instruction. while is a top-driven structured loop, while until defines a bottom-driven unstructured loop. Loop control variables can be altered from within the loop and the leave, iterate, signal, return, and exit instructions may also modify loop behavior.

DROP

```
DROP symbol [ symbol ... ]
```

drop "unassigns" one or more variables or stems by setting them to uninitialized.

Example

EXIT

```
EXIT [ expression ]
```

exit unconditionally terminates a program and optionally returns the single value defined by expression to the caller.

Example

```
exit 1 /* unconditional termination, sends '1' to environment */
exit /* unconditional termination with no return code */
```

IF

```
IF expression [;] THEN [;] instruction [ ELSE [;] instruction ]
```

if conditionally executes a "branch" of instruction(s). The expression must evaluate to either 0 or 1. The else always matches to the nearest unmatched if. To execute more than one instruction after the then or else, use a do-end pair: then do . . . end or else do . . . end. To code a branch with no instructions, use the nop instruction.

```
if b = 1 then say 'B is 1'
                                  /* a simple IF instruction
                                                                         * /
           else say 'B is not 1'
if b = 1 then do
                                  /* THEN DO and ELSE DO are required
                                  /* to execute more than 1 instruction */
   say 'B is 1'
   say 'TRUE branch taken'
                                  /* in a branch.
                                  /* END terminates a logical branch.
   end
else do
   say 'B is not 1'
    say 'FALSE branch taken'
end
```

INTERPRET

```
INTERPRET expression
```

interpret executes instructions that may be built dynamically within the expression. The expression is evaluated, then executed. The expression must be *syntactically complete*; for example, a do must include a matched end. interpret is useful for creating *self-modifying scripts*. Set trace r or trace i if experiencing problems with interpret.

Example

```
interpret say 'Hi there' /* interprets (executes) the SAY instruction */
```

ITERATE

```
ITERATE [ symbol ]
```

iterate alters the flow of control within a do loop by passing control directly back to the do instruction of that loop. This skips any subsequent instructions encoded south of the iterate instruction within that execution of the do loop.

Example

LEAVE

```
LEAVE [ symbol ]
```

leave alters the flow of control within a do loop by immediately passing control directly to the instruction following the end clause. This causes an unstructured exit from the do loop. Whereas iterate sets the loop to start on a new iteration, leave exits the loop.

NOP

```
NOP
```

nop means no operation. It can be used within an if statement to code a branch with no action taken.

Example

NUMERIC

```
NUMERIC DIGITS [ expression ]

FORM [ SCIENTIFIC | ENGINEERING | [ VALUE ] expression ]

FUZZ [ expression ]
```

The numeric instruction controls various aspects of numeric calculation. digits set the number of significant digits; it defaults to 9. form sets the form in which exponential numbers are written; it defaults to scientific. fuzz controls how many digits will be ignored during comparisons; it defaults to 0.

Use the digits (), form() and fuzz() functions to find out the current values for these numeric settings.

Example

```
numeric digits 12 /* Set precision to 12 significant digits. */
say digits() /* This will now display: 12. */
numeric form engineering /* Display exponential numbers in engineering format. */
say form() /* This will now display: ENGINEERING. */
numeric fuzz 1 /* 1 digit will be ignored during comparisons. */
say fuzz() /* will now display: 1 */
```

Note that the example code is run in sequence.

OPTIONS

```
OPTIONS expression
```

options passes commands to the interpreter. It can be used to alter the behavior of the Rexx interpreter or its defaults. *The options allowable are strictly implementation-dependent*. Interpreters ignore any options they do not recognize. This is good because it means implementation-dependent coding on this statement runs under other interpreters. But it also means that you must check to see whether the options you coded were implemented or ignored.

Example

PARSE

```
PARSE [ UPPER ] type [ template ]

type is: [ ARG | LINEIN | PULL | SOURCE | VERSION ]

VALUE [ expression ] WITH

VAR symbol
```

parse assigns values to one or more variables from various data sources according to parsing rules and its template. If upper is specified, all input values are translated to uppercase.

- ☐ ARG—Parses input values to this routine
- ☐ LINEIN—Reads a line from the default input stream and parses it into ariable(s)
- □ PULL Reads a line from the stack, or it is empty, from the default input stream and parses this string into variable(s)
- □ SOURCE Reads three words of system-dependent information:

```
system how_the_script_was_invoked filename_of_the_script
```

- VERSION Reads five words of system-dependent information: language level date month year
- □ VALUE expression WITH Evaluates the expression and then parses it
- ☐ VAR symbol Parses the string in symbol

```
/* internal routine reads its parameters
parse arg a, b
                    /* reads a line from default input stream
parse linein
parse pull a
                     /* reads A from the stack or input stream
                     /* parse the return from the DATE function */
parse value date() with dd mmm yyyy
say dd mmm yyyy
                    /* displays something like: 15 Jun 2005
string = ' a b' /* parses STRING, displays: a b
                                                               */
parse var string c d
                      /* retrieve and display system information */
parse source system how_called filename
say system how_called filename
parse version language level date month year
say language level date month year
```

PROCEDURE

```
PROCEDURE [ EXPOSE variable_list ]
```

The procedure instruction makes all variables of the caller unavailable to this one. If it is not coded, all the caller's variables are available to this routine (they are global). If procedure is coded with the expose keyword, only the variables listed after the expose keyword are available to this routine. Exposed variables are accessible for both reading and updating by the routine.

Example

PULL

```
PULL [ template ]
```

pull reads a line from the stack, or if none is available, reads a line from the default input stream. pull parses the input according to the template and always translates all arguments to uppercase. pull is equivalent to: parse upper pull [template].

Example

PUSH

```
PUSH [ expression ]
```

Adds a line to the external data queue or stack, in the order last-in, first-out (LIFO). Use the queued() function to determine how many elements are on the stack at any time.

Example

```
push line /* pushes LINE onto the stack LIFO */
```

QUEUE

```
QUEUE [ expression ]
```

Appendix B

Adds a line to the external data queue or stack, in the order first-in, first-out (FIFO). Use the queued() function to determine how many elements are on the stack at any time.

Example

```
queue line /* places LINE onto the stack FIFO */
```

RETURN

```
RETURN [ expression ]
```

Returns control from a program or internal routine to its caller, optionally passing the single result of expression.

Example

```
return /* return with no result */
return 4 /* return with result of: 4 */
```

SAY

```
SAY [ expression ]
```

Writes a line to the default output stream, after evaluating expression. Using say is the same as coding: call lineout, [expression].

Example

```
say 'Hi' /* displays: Hi */
say 'Hi' 'there' /* displays: Hi there */
```

SELECT

```
SELECT ; when_part [ when_part ... ] [ OTHERWISE [;] [ statement ... ] ] END ;

when_part is: WHEN expression [;] THEN [;] statement
```

select implements the Case construct for determining the flow of control. Only the first when condition that evaluates to true (1) executes. otherwise executes if none of the when conditions are true. If no otherwise is provided and none of the when conditions is true, a syntax error results. We recommend always coding an otherwise clause.

Example

```
select
  when input = 'yes' then do
    say 'YES!'
    say 'branch 1'
  end
  when input = 'no' then do
    say 'NO!'
    say 'branch 2'
  end
  otherwise
    say 'user is crazy'
    exit 99
end /* select */
```

SIGNAL

```
| label_name
| SIGNAL | [ VALUE ] expression
| ON condition [ NAME trapname ] |
| OFF condition
```

signal either causes an immediate unstructured transfer of control to the label at label_name, or enables or disables an error condition. If on is specified, signal enables the error condition and optionally specifies the name of the routine invoked when it is raised. The condition must be one of error, failure, halt, novalue, notready, or syntax. The ANSI-1996 standard adds the new condition lostdigits. Specifying off disables an error condition.

If neither on nor off is specified, signal directly transfers control to the label of label_name, rather like the goto of other computer languages. Any active do, if, select, and interpret instructions are terminated. The value keyword allows transfer of control to a label whose name is determined at execution time.

Example

```
signal on error /* enables ERROR trap with routine of ERROR: */
signal on error name error_handler /* enables ERROR to ERROR_HANDLER: */
signal off error /* disables ERROR trap */
signal goto_place /* immediately goes to the label goto_place: */
```

TRACE

```
TRACE trace_setting | [ VALUE ] expression
```

Appendix B

trace_setting is any of these flags:

- □ A—All
- □ C—Commands
- □ E—Errors
- ☐ F—Failure
- □ I Intermediates
- □ L—Labels
- □ N—Normal
- □ o—Off
- □ R—Results
- □ ? —Toggles *interactive tracing* on or off; can be followed by any letter in this list only.
- ☐ A positive whole number If in interactive trace, skips the number of pauses specified
- ☐ A negative whole number Inhibits tracing for the number of clauses specified

Sets the *trace level* for debugging. Multiple trace instructions may be placed within a script, altering the trace level at will. Setting it to a positive or negative whole number during interactive tracing skips or inhibits tracing for that number of pauses or clauses.

Use the trace() function to retrieve the current setting for the trace level.

```
say trace() /* displays the current trace setting */
trace a /* turn on TRACE ALL */
trace ?I /* turn on interactive trace with setting of I */
```



Functions

This appendix provides a reference to all Rexx functions, as defined by the ANSI-1996 standard. It also points out the important differences between the ANSI-1996 standard and the earlier standard defined by TRL-2. As this appendix is intended as a quick reference guide for developers, please see the full ANSI-1996 and TRL-2 standards if more detailed information is required. Appendix A tells where to obtain the two standards.

Each entry is identified by the name of the function. Entries contain a template of the function, showing its arguments, if any. Optional arguments are enclosed in brackets ([]). The template is followed by a description of the function and its use, the function's arguments, and possible return codes. Coding examples show how to code each function.

ABBREV

```
ABBREV(information, info [,length])
```

Returns 1 if info is equal to the leading characters of information and info is not less than the minimum length. Otherwise returns 0. If not specified, length defaults to the length of info.

Example

```
abbrev('Hello','He') == 1
abbrev('Hello','Hi') == 0
abbrev('Hello','Hi',3) == 0 /* INFO does not meet minimum LENGTH. */
```

ABS

```
ABS (number)
```

Returns the absolute value of number, formatted according to the current setting of numeric digits and without a leading sign.

Appendix C

Example

```
abs(-0.47) == 0.47

abs(0) == 0
```

ADDRESS

```
ADDRESS()
```

Returns the name of the environment to which commands are currently directed.

The ANSI-1996 standard allows a new format for this function that specifies an option. The option returns information on the targets of command output and the sources of command input. Here is the coding template with the option specified:

```
ADDRESS([option])
```

option may be any one of the following:

- □ N (Normal) Returns the current default environment
- ☐ I (Input) Returns the target details for input as three words: position type resource
- □ (Output) Returns the target details for output as three words: position type resource
- ☐ E (Error) Returns the target details for errors as three words: position type resource

Example

ARG

```
ARG([argnum [,option]])
```

If argnum and option are not specified, returns the number of arguments passed to the program or internal routine. If *only* argnum is specified, returns the *n*th argument string, or the null string if the argument does not exist. The option may be either:

- \square E or e (Exists) Returns 1 if the *n*th argument exists.
- \bigcirc or \circ (**O**mitted) Returns 1 if the *n*th argument was omitted.

Example

```
/* If issued from a routine invoked by: call routine 1, 2 */
arg() == 2
arg(1) == 1
arg(2) == 2
arg(3) == '' /* the null string */
arg(1,'e') == 1
arg(1,'E') == 1
arg(1,'o') == 0
arg(3,'o') == 1
```

BITAND

```
BITAND(string1 [,[string2] [,pad]])
```

Returns a string derived from logically ANDing two input strings, bit by bit.

If pad is omitted, ANDing terminates when the shorter string ends, and the remaining portion of the longer string is appended to the result. If pad is specified, the shorter string is padded on the right prior to the ANDing.

Example

```
bitand('00110011','00001111') == 00000011
```

BITOR

```
BITOR(string1 [,[string2] [,pad]])
```

Returns a string derived from logically ORing two strings, bit by bit.

If pad is omitted, ORing terminates when the shorter string ends, and the remaining portion of the longer string is appended to the result. If pad is specified, the shorter string is padded on the right prior to the ORing.

```
Examples: -- bitor('00110011','00001111') == 00111111
```

BITXOR

```
BITXOR(string1 [,[string2] [,pad]])
```

Returns a string derived from logically EXCLUSIVE ORing two strings, bit by bit.

Appendix C

If pad is omitted, EXCLUSIVE ORing terminates when the shorter string ends, and the remaining portion of the longer string is appended to the result. If pad is specified, the shorter string is padded on the right prior to the EXCLUSIVE ORing.

Example

```
bitxor('123456'x,'3456'x) == '266256'x
```

See this result on the display screen by entering:

```
say c2x(bitxor('123456'x,'3456'x))
```

B2X

```
B2X(binary_string)
```

Converts a binary string to its hexadecimal (base 16) equivalent. The hex string will consist of digits 0 to 9 and uppercase letters A through F.

Example

```
b2x('11000010') == C2

b2x('111') == 7
```

CENTER or CENTRE

```
CENTER(string, length [,pad])
--or--
CENTRE(string, length [,pad])
```

Returns a string of the length specified by length with the string centered within it. Characters of type pad are added to achieve the required length pad defaults to blanks.

Example

```
center('HELP!',9) == ' HELP!' /* 2 spaces are on each side of HELP! */ center('HELP!',9,'x') == 'xxHELP!xx' /* 2 x's are added on each side. */
```

CHANGESTR

```
CHANGESTR(needle, haystack, newneedle)
```

This function was added by the ANSI-1996 standard. It replaces all occurrences of string needle in string haystack with string newneedle. Returns the haystack if needle is not found.

Example

CHARIN

```
CHARIN([name] [,[start] [,length]])
```

Returns up to length characters from the character input stream name. The default length is 1, and the default character stream is the default input stream.

start may be coded to move the read pointer of a persistent stream and explicitly specify where to start the read. A start position of 1 is the first character in the persistent stream. To move the read pointer for a persistent stream without reading any input, specify a read length of 0.

If length number of characters cannot be returned, the program waits until they become available, or else the NOTREADY condition is raised and charin returns with fewer characters than requested.

Example

CHAROUT

```
CHAROUT([name] [,[string] [,start]])
```

Writes the characters of string to the output stream specified by name, starting at position start. Returns the number of characters remaining after the output attempt; a return of 0 means a successful write.

If start is omitted, characters are written at the current write pointer position (for example, appended to the end of the persistent stream or output file). If name is omitted, characters are written to the default output stream (normally the display screen).

To position the write pointer, specify start and omit string. A start value of 1 is the beginning of an output file.

The NOTREADY condition is raised if all characters cannot be written.

CHARS

```
CHARS([name])
```

Returns the number of characters remaining to be read in stream name. In the ANSI-1996 standard, chars may alternatively return 1 when *any number* of characters remain to be read. Always returns 0 if there are no characters left to read. If name is omitted, the function applies to the default input stream.

Example

COMPARE

```
COMPARE(string1, string2 [,pad])
```

Returns 0 if the strings are the same. Otherwise, it returns the position of the first character that is not the same in both strings. If one string is shorter, pad is used to pad it for comparison. pad defaults to blanks.

Example

```
compare('Hello','Hello') == 0
compare('Hello','He') == 3
compare('Hello','He','x') == 3
```

CONDITION

```
CONDITION([option])
```

Returns condition information concerning the current trapped condition, or the null string if no condition has been trapped. The option may be coded as follows:

- □ C (Condition name) Name of the currently trapped condition
- □ D (Description) Descriptive string for the condition
- ☐ I (Instruction) Returns the invoking instruction, either call or signal. This is the default if no option is specified.
- □ S (State) Returns state of the trapped condition, either ON, OFF, or DELAY.

Example

```
condition() == CALL  /* if the trap was enabled by CALL  */
condition('C') == FAILURE  /* if the condition trapped was FAILURE */
condition('I') == CALL  /* if the trap was enabled by CALL  */
condition('S') == OFF  /* if the state is now OFF  */
```

COPIES

```
COPIES(string, times)
```

Returns a string copied the number of times specified by times.

Example

```
copies('Hello',3) == HelloHelloHello
```

COUNTSTR

```
COUNTSTR(needle, haystack)
```

This function was added by the ANSI-1996 standard. It returns the count of the number of times needle occurs within haystack. Returns 0 if the needle is not found.

Example

```
countstr('a','abracadabra') == 5
```

C₂D

```
C2D(string [,length])
```

Character to decimal conversion. Returns the decimal representation of a character string. Optional length specifies the number of characters of string to be converted. length defaults to the full string length, and string is considered an unsigned number.

```
c2d('14'x) == 20 /* hexadecimal 14 converted to decimal is 20 */ c2d('hi') == 26729 /* on ASCII machines only */
```

C2X

```
C2X(string)
```

Character to hexadecimal conversion. Returns the string of hex digits that represent string.

Example

```
c2x('123'x) == 0123

c2x('abc') == 616263 /* on ASCII machines only */
```

DATATYPE

```
DATATYPE(string [,type])
```

If type is omitted, returns NUM if string is a valid Rexx number; returns CHAR otherwise.

If type is specified, returns 1 if the string matches the type; returns 0 otherwise. Allowable type specifications are:

- ☐ A (Alphanumeric) Returns 1 if string consists solely of alphanumeric characters 0–9, a–z, and A–Z
- ☐ B (Binary) Returns 1 if string contains only 0's and 1's
- ☐ L(Lowercase) Returns 1 if string consists solely of characters a-z
- ☐ M (Mixed case) Returns 1 if string consists of characters a–z and A–Z
- □ N (Number) Returns 1 if string is a valid Rexx number
- ☐ S (Symbol) Returns 1 if string consists of characters valid in Rexx symbols
- ☐ U (Uppercase) Returns 1 if string consists of characters A–Z
- ☐ W (Whole number) Returns 1 if string is a Rexx whole number
- □ X (HeXadecimal) Returns 1 if string is a hex number, containing only characters a–f, A–F, and digits 0–9

DATE

```
DATE( [option_out [,date [,option_in]]] )
```

If all options are omitted, returns the date in the format dd Mmm yyyy, for example: 14 Jun 2005.

If the first argument is supplied, it defines the format of the return string. The list below shows possible encodings for the option_out parameter:

- B (Base) Returns the number of complete days since the base date of January 1, 0001.
- □ D(Days) Returns the number of days so far in the year (includes the current day)
- ☐ E (European) Returns the date in EU format, dd/mm/yy
- ☐ M (Month) Returns the full English name of the current month, for example: June
- □ N (Normal) Returns the date in the default format (see above)
- □ (Ordered) Returns the date in a sort-friendly format yy/mm/dd
- □ S (Standard) Returns the date in the sort-friendly format yyyymmdd
- □ U (USA) Returns the date in American format, mm/dd/yy
- □ W (Weekday) Returns the English name for the day of the week, for example: Monday

If the date option is encoded, the function converts that date. The parameter option_in specifies the format in which the date is supplied and option_out is the target format to which the date is converted.

The TRL-2 form of this function only allows for coding the first argument. ANSI-1996 adds the other two arguments.

Example

DELSTR

```
DELSTR(string, start [,length])
```

Deletes the substring of string that starts at position start for the specified length. If length is omitted, the rest of the string is deleted from position start to the end.

```
delstr('abcd',2) == a
delstr('abcd',2,1) == acd
```

DELWORD

```
DELWORD(string, start [,length])
```

Deletes the substring of string that starts at position start and is of length length blank-delimited words. If length is omitted, it defaults to removing the rest of the words in string.

Example

```
delword('Roses are Red',2) == Roses /* deletes from word 2 to end */
delword('Roses are Red',2,1) == Roses Red /* deletes 1 word at position 2 */
```

DIGITS

```
DIGITS()
```

Returns the current setting of numeric digits (which dictates the precision of calculations).

Example

D₂C

```
D2C(integer [,length])
```

Decimal-to-character conversion. Returns the character string representation of integer. If length is specified, the returned string will be length bytes long with sign extension.

Example

```
d2c(127) == '7F'x /* to display a result enter: say c2x(d2c(127)) */
d2c(0) == '' /* returns the null string */
```

D2X

```
D2X(integer [,length])
```

Decimal-to-hexadecimal conversion. Returns the hex representation of integer. length specifies the length of the resulting string.

```
d2x(127) == 7F

d2x(0) == 0
```

ERRORTEXT

```
ERRORTEXT (error_no)
```

Returns the textual error message associated with the given error number, error_no. The ANSI-1996 standard adds the ability to retrieve the text from error submessages. For example, you could retrieve the textual equivalent of error submessage 14.1.

Example

```
say errortext(14) == Incomplete DO/SELECT/IF
```

FORM

```
FORM()
```

Returns the current form in which numbers are exponentially represented, either scientific or engineering.

Example

```
say form() == SCIENTIFIC /* this is the default if not altered by NUMERIC FORM */
```

FORMAT

```
FORMAT(number [,[before] [,[after]]])
```

Rounds and formats a number. before and after control the number of characters used for the integer and decimal parts, respectively.

Example

```
format('1',4) == ' 1' /* 3 blanks precede the 1. */
format('1.22',4,0) == ' 1' /* 3 blanks precede the 1. */
format('1.22',4,2) == ' 1.22' /* 3 blanks precede the 1. */
format('00.00') == '0'
```

FORMAT

```
FORMAT(number [,[before] [,[after] [,[expp] [,expt]]]])
```

In this version of the format function, expp and expt control the formatting of the exponential part of the result. expp is the number of digits used for the exponential part, while expt sets the trigger for the use of exponential notation.

Appendix C

Example

```
format('12345.67',,,2,3) == '1.234567E+04'
format('12345.67',,4,4) == '1.234567E+0004'
format('12345.67',,2,,0) == '1.23E+4'
format('12345.67',,3,,0) == '1.235E+4'
```

FUZZ

```
FUZZ()
```

Returns the current setting of numeric fuzz.

Example

```
fuzz() == 0 /* if the default of NUMERIC FUZZ was not altered */
```

INSERT

```
INSERT(string, target [,[position] [,length] [,pad]])
```

Returns the result of inserting string into the target string. position specifies where the insertion occurs, with a default of 0 (prior to any characters of the target string). length pads with the pad character or truncates string before it is inserted into the target string, as necessary.

Example

```
insert('J.','Felix Unger',6,3) == 'Felix J. Unger'
insert('Happy!','I am',5) == 'I am Happy!'
```

LASTPOS

```
LASTPOS(needle, haystack [,start])
```

Returns the last occurrence of one string, the needle, within another, the haystack. The search starts at the last position within the haystack, or may be set by start. Returns 0 if the needle string is not found in the haystack.

```
lastpos('abc','abcdef') == 1
lastpos('abc','abcabcabc') == 7
lastpos('abcd',abcabcabc') == 0 /* The needle was not found in the haystack. */
```

LEFT

```
LEFT(string, length [,pad])
```

Returns the length leftmost characters in string. Pads with the pad character if length is greater than the length of string.

Example

LENGTH

```
LENGTH(string)
```

Returns the length of string.

Example

```
length('Me first!') == 9
length('') == 0 /* length of the null string is 0 */
```

LINEIN

```
LINEIN([name] [,[line] [,count]])
```

Returns lines from the input stream name. count may be 0 or 1, and it defaults to 1. name defaults to the default input stream. line positions to the given line number prior to the read. count may be specified as 0 with a line number to position the read pointer to a particular line in a persistent input file without reading data.

Example

LINEOUT

```
LINEOUT([name] [,[string] [,line]])
```

Writes string to output stream name and returns either 0 on a successful write or 1 on failure.

Appendix C

May be used to position the write pointer before a specified line number on persistent streams or files. If string and line are omitted, the write position is set to the end of stream. In most Rexxes, this closes the file specified by name.

Example

LINES

```
LINES([name])
```

Returns 0 if no lines remain to be read from the name input stream. Otherwise, it returns 1 or the actual number of lines in the input stream.

Example

```
lines('text_file') == 0  /* end of file, no lines left to read */
lines('text_file') == 127  /* 127 lines left to read on input  */
lines('text_file') == 1  /* 1 (or more) lines left to read  */
```

This is a new format for the lines function added by the ANSI-1996 standard. This new format adds an option to control whether or not the user wants the interpreter to return an exact line count at the cost of performance overhead:

```
LINES([name] [,option])
```

In this format, the option may be either:

- ☐ C (Count) Returns the exact number of lines left in the input stream
- □ N (Normal) Default. Returns 1 if there are one or more lines left in input stream

Example

```
lines('text_file') == 1 /* 1 (or more) lines left to read */
lines('text_file','N') == 1 /* 1 (or more) lines left to read */
lines('text_file','C') == 1 /* EXACTLY 1 line left to read */
```

MAX

```
MAX(number1 [,number2]...)
```

Returns the largest number from the list of numbers.

```
\max(-9,14,0) == 14
```

MIN

```
MIN(number1 [,number2]...)
```

Returns the smallest number from the list of numbers.

Example

```
min(-9,14,0) == -9
```

OVERLAY

```
OVERLAY(string1, string2 [,[start] [,[length] [,pad]]])
```

Returns a copy of string2, partially or fully overwritten by string1. start specifies the starting position of the overlay, and defaults to the first position, 1. length truncates or pads string1 prior to the operation, using pad as the pad character.

Example

```
overlay('not','this is really right',9,6,'.') == 'this is not... right'
overlay('eous','this is right',14) == 'this is righteous'
```

POS

```
POS(needle, haystack [,start])
```

Returns the first position of the string needle within the string haystack. The scan starts at the first position in the haystack, unless start is coded as some number other than 1. Returns 0 if needle does not occur within haystack.

```
pos('abc','abcdef') == 1
pos('ab','abracadabra') == 1
pos('abd','abracadabra') == 0 /* needle was not found in the haystack */
```

QUALIFY

```
QUALIFY([streamid])
```

This function was added by the ANSI-1996 standard. It returns a name for the streamid that will be associated with the persistent stream or file and can be used in future references to that resource.

Example

QUEUED

```
QUEUED()
```

Returns the number of lines remaining in the external data queue (the stack).

Example

```
queued() == 5 /* five reads will process the stack */
```

RANDOM

```
RANDOM(max) or RANDOM([min] [,[max] [,seed]])
```

Returns a pseudo-random integer. In the first format, this number will be between 0 and max. The second format allows the dictating of the eligible range of numbers and the seeding of the operation.

Example

```
random(5) /* returns a pseudo-random number between 0 and 5 */ random(1,6) /* simulate the roll of one die */
```

REVERSE

```
REVERSE(string)
```

Returns a copy of a string with its characters reversed.

```
reverse('abc') == 'cba'
```

RIGHT

```
RIGHT(string, length [,pad])
```

Returns a string of length length containing the rightmost characters of string, padded with the pad character or truncated to fit the length.

Example

```
right('abc',7) == ' abc' /* 4 spaces precede: abc */
right('abc',7,'x') == 'xxxxabc' /* 4 x's precede: abc */
```

SIGN

```
SIGN(number)
```

Returns 1 if the number is positive, 0 if the number is 0, and -1 if the number is negative.

Example

```
sign(-88) == -1

sign(88) == 1

sign(+0) == 0
```

SOURCELINE

```
SOURCELINE([line_number])
```

With no argument, sourceline returns the number of lines in the script. If line_number is given, that specific line is returned from the script.

Example

```
sourceline(2)  /* returns the second line in the script */
sourceline()  /* returns the line number of the last line in the script */
```

SPACE

```
SPACE(string [,[length] [,pad]])
```

Formats a string by replacing internal blanks with length occurrences of the pad character. The default pad character is blank and the default length is 1. Leading and trailing blanks are always removed. If length is 0, all blanks are removed.

```
space('abc abc') == 'abc abc' /* reduces 3 internal spaces to 1 */
space('abc abc',1,'x') == 'abcxabc' /* reduces 3 internal spaces to one x */
space('abc abc',0) == 'abcabc' /* LENGTH of 0 removes spaces */
```

STREAM

```
STREAM(name [,option [,command]])
```

name is the stream to which to apply an option and optionally a command. The options are:

- ☐ C (Command) Issues the command (implementation-dependent)
- □ D (Description) Returns textual description of the stream's state
- □ S (State)—Returns the stream's state, which will be either: ERROR, NOTREADY, READY, or UNKNOWN.

The commands that can be encoded on the stream function depend on the interpreter. See your interpreter's reference guide to see what commands it supports. Many interpreters permit such operations as explicitly opening, closing, and flushing files; moving the file position pointers; returning detailed stream information; and setting and/or changing the file's processing mode.

Example

STRIP

```
STRIP(string [,option] [,char]])
```

Returns string stripped of leading and/or trailing blanks or any other char specified. Option values determine the action:

- ☐ L (Leading) Strip off leading blanks or char if specified.
- ☐ T (Trailing)—Strip off trailing blanks or char if specified.
- □ B (Both) Strip off both leading and trailing blanks or char if specified. This is the default.

```
strip(' abc ') == 'abc' /* strip off both leading & trailing blanks */
strip('xxxabcxxx',,'x') == 'abc' /* strip off both leading & trailing x's */
strip('xxxabcxxx','t','x')== 'xxxabc' /* strip off only trailing x's */
```

SUBSTR

```
SUBSTR(string, start [,[length] [,pad]])
```

Returns a substring from string. start is the starting character position in string, defaulting to 1. length is how many characters to take, defaulting to the remainder of the string from start. If length is longer than the string, padding occurs with the pad character, which defaults to the blank.

Example

SUBWORD

```
SUBWORD(string, start [,length])
```

Returns the substring that begins at blank-delimited word start. If length is omitted, it defaults to the remainder of the string.

Example

```
subword('Violets are due',3) == 'due'
subword('Violets are due',4) == '' /* null string, no fourth word */
```

SYMBOL

```
SYMBOL(name)
```

Returns the state of symbol name. Returns:

- ☐ BAD—name is not a valid symbol.
- □ VAR name is a symbol and has been assigned a value.
- □ LIT—name is valid symbol but is assigned no value (or it is a constant symbol).

```
a = 'valid!'
symbol('a') == VAR
symbol('b') == LIT  /* b has not been assigned. */
```

TIME

```
TIME( [option_out [,time [option_in]] ] )
```

The TRL-2 form of this function allows for coding the first argument only. ANSI-1996 adds the other two arguments.

If only the first parameter is encoded, the function returns the system time in 24-hour clock format: hh:mm:ss, for example: 19:19:50. Options include:

- □ C (Civil)—Returns hh:mmxx civil-format time. xx is am or pm.
- □ E (Elapsed) Returns elapsed time since the clock was started or reset, in the format sssssssss.uuuuuu
- ☐ H (Hours) Returns the number of completed hours since midnight in the format hh. Values range from 0 to 23.
- ☐ L (Long) Returns the time in long format: hh:mm:ss.uuuuuu
- ☐ M (Minutes)—Returns the number of completed minutes since midnight in the format mmmm
- □ N (Normal) Returns the time in the default format (hh:mm:ss)
- Reset)—Returns elapsed time since the clock was started or reset in the format ssssssss.uuuuuu
- □ S (Seconds) Returns the number of complete seconds since midnight

Example

```
time('C') == 7:25pm /* for example */
time('m') == 1166 /* for example */
```

To use the elapsed timer, make a first call to time('e') or time('r'). This returns 0. Subsequent calls to time('e') and time('r') will return the elapsed interval since the first call or since the last call to time('r').

Example

```
time('e') == 0 /* first call always returns 0 */ time('e') == 46.172000 /* time elapsed since first call */
```

In the ANSI-1996 version of this function, if the time option is encoded, the function converts that time. The parameter <code>option_in</code> specifies the format in which the time is supplied and <code>option_out</code> is the target format to which the time is converted.

TRACE

```
TRACE([setting])
```

Returns the trace setting. If setting is specified, it sets the trace to that level (and returns the old trace value). The settings are:

- □ A (All) Trace all clauses before execution.
- ☐ C (Commands) Trace all host commands before execution.
- □ E (Errors) Trace host commands that result in error or failure.
- ☐ F (Failure) Trace host commands that fail.
- ☐ I (Intermediates) Trace all clauses before execution, with intermediate results.
- □ L (Labels) Trace labels.
- □ N (Normal) Default, trace only host commands that fail.
- \Box \circ (Off) Trace nothing.
- ☐ R (Results) Trace clauses before execution and expression results.
- ? (interactive) Toggles the interactive trace on or off. May precede any of the preceding letters.

Unlike the trace instruction, whole numbers may not be coded on the trace function.

Example

TRANSLATE

```
TRANSLATE(string [,[tableout] [,[tablein] [,pad]]])
```

Returns a translated copy of string. Characters are translated according to the input translation table tablein and its output equivalent, tableout. If tablein and tableout are not coded, all characters in string are translated to uppercase. If tableout is shorter than tablein, it is padded with the pad character or its default, blanks.

Example

```
translate('abc') == 'ABC' /* translates to uppercase */
translate('abc','xy','ab') == 'xyc' /* a and b were translated */
```

TRUNC

```
TRUNC(number [,length])
```

Returns number truncated to length decimal places. If not specified, length is 0, meaning that a whole number is returned.

```
trunc(27.33) == 27 /* returns a whole number */
trunc(27.23,1) == 27.2 /* truncated to 1 decimal place */
trunc(27.23,3) == 27.230 /* 3 places past decimal place */
```

VALUE

```
VALUE(symbol [,[newvalue] [,pool]])
```

Returns the value of the variable specified by symbol. If newvalue is specified, this value is assigned to the named variable. pool references an implementation-dependent variable collection or pool to search for the symbol. This function performs an extra level of variable interpretation.

Example

```
/* assume these statements are executed in sequence */
a = 2
b = 'a'
value('b') == a /* looks up b */
value(b) == 2 /* looks up a */

/* this second example shows updating an environmental variable via VALUE */
/* The variable to update is called REXXPATH, and the value it will be */
/* assigned is in the second argument. ENVIRONMENT is the pool name. */
call value 'REXXPATH','/afs/slac/www/slac/www/tool/cgi-rexx','ENVIRONMENT'
```

VERIFY

```
VERIFY(string, reference [,[option] [,start]])
```

Verifies that all characters in string are members of the reference string. Returns the position of the first character in string that is not in reference, or 0 if all characters in string are in reference.

start specifies where in string to start the search, the default is 1. The option may be:

- □ N (Nomatch) Default. Works as described earlier.
- ☐ M(Match)—Returns the position of the first character in string that *is* in reference.

```
verify('ab12','abcdefgh') == 3 /* 1 is the first character not in REFERENCE */
verify('dg','abcdefgh') == 0 /* all STRING characters are in REFERENCE */
verify('dg','abcdefgh','m') == 1 /* d is first character found in REFERENCE */
```

WORD

```
WORD(string, wordno)
```

Returns the blank-delimited word number wordno from the string string, or the null string, if the word does not exist in string.

Example

```
word('tis the time',2) == 'the'
word('tis the time,4) == '' /* The null string is returned. */
```

WORDINDEX

```
WORDINDEX(string, wordno)
```

Returns the character position of the first character of the blank-delimited word given by word number wordno within string. Returns 0 if the word numbered wordno does not exist in the string.

Example

```
wordindex('tis the time',2) == 5 /* 'the' starts in position 5 */
```

WORDLENGTH

```
WORDLENGTH(string, wordno)
```

Returns the length of blank-delimited word wordno within the string. Returns 0 for a nonexistent word.

Example

```
wordlength('tis the time',2) == 3 /* 'the' has three characters */
```

WORDPOS

```
WORDPOS(phrase, string [,start])
```

If phrase is a substring of string, returns the word number position at which it begins. Otherwise returns 0. start is an optional word number within string at which the search starts. It defaults to 1.

```
wordpos('time of','tis the time of the season') == 3
wordpos('never','tis the time of the season') == 0 /* phrase not found */
```

Appendix C

WORDS

```
WORDS (string)
```

Returns the number of blank-delimited words within the string.

Example

```
words('tis the time of the season for love') == 8
words('tis the time of the season for love') == 8
```

XRANGE

```
XRANGE([start] [,end])
```

Returns a string composed of all the characters between start and end inclusive. start defaults to '00'x, and end defaults to 'FF'x.

Example

```
xrange('a','d') == 'abcd'
xrange() /* returns the entire character set from '00'x thru 'FF'x */
```

X₂B

```
X2B(hexstring)
```

Hexadecimal to binary string conversion.

Example

```
x2b('ff') == '111111111'
x2b('ff') == '11111111'
x2b('0d0a') == '0000110100001010'
```

X2C

```
X2C(hexstring)
```

Hexadecimal-to--character string conversion.

X2D

```
X2D(hexstring [,length])
```

Hexadecimal-to-decimal conversion. Returns the whole number string that is the decimal representation of hexstring. Omitting length means hexstring will be interpreted as an unsigned number. Coding length means the leftmost bit of hexstring determines the sign.

```
x2d('FFFF') == 65535
 x2d('FFFF',4) == -1 /* LENGTH means signed interpretation */
```



Regina Extended Functions

This appendix provides a reference to all functions Regina Rexx provides beyond the ANSI-1996 and TRL-2 standards. This appendix as intended as a quick reference guide for developers, so please see the Regina documentation if more detailed information is required. The Regina documentation is easily downloaded with the product itself, as described in Chapter 20.

Each of the following entries is identified by the name of the function. Entries contain a template of the function, showing its arguments, if any. Optional arguments are enclosed in brackets ([]). The vertical "or" bar (|) means to choose exactly one option from among the choices listed. The template is followed by a description of the function and its use, the function's arguments, and possible return codes. Coding examples show how to code each function.

To make some of the extended functions available, you must issue the options instruction with appropriate operands. Here are a few key examples.

To enable the VM buffer functions buftype, desbuf, dropbuf, and makebuf, encode:

```
options buffers
```

To enable the Amiga Rexx (AREXX) functions, encode this instruction. Note that *bifs* is a popular acronym that stands for "built-in functions:"

```
options arexx_bifs
```

If you want the open, close, and eof functions to use AREXX semantics instead of standard Regina semantics encode:

```
options arexx_semantics
```

B₂C

```
B2C(binstring)
```

Converts a binary string of 0s and 1s into its corresponding character representation.

Appendix D

Example

```
b2c('01100011') == c /* displays the character the bitstring represents */ <math>b2c('00110011') == 3
```

BEEP

```
BEEP(frequency [,duration])
```

Sounds a tone through the default speaker. The duration is in milliseconds.

Example

```
beep(40,1000) /* generates a brief tone through the system speaker */
beep(70,1000) /* generates a higher pitched tone than example 1 */
beep(70,2000) /* generates a tone for twice as long */
```

BITCHG

```
BITCHG(string, bit)
```

Toggles (reverses) the state of the specified bit in the string. Bit 0 is the low-order bit of the rightmost byte of the string.

Example

```
bitchg('0313'x,4) == '0303'x
```

To display this result, encode:

```
say c2x(bitchg('0313'x,4))
```

BITCLR

```
BITCLR(string, bit)
```

Sets the specified bit in the string to 0. Bit 0 is the low-order bit of the rightmost byte of the string. This is the inverse of the bitset (bit set) function.

```
bitclr('0313'x,4) == '0303'x
```

To display this result, encode:

```
say c2x(bitclr('0313'x,4))
```

BITCOMP

```
BITCOMP(string1, string2, bit [,pad] )
```

Bit-compares the two strings, starting at bit 0. Bit 0 is the low-order bit of the rightmost byte of the string. Returns the bit number of the first bit by which the two strings differ, or -1 if the two strings are identical.

Example

```
bitcomp('ff'x, 'ff',x) == -1
bitcomp('aa'x,'ab'x) == 0
bitcomp('aa'x,'ba'x) == 4
bitcomp('FF'x,'F7'x) == 3
bitcomp('FF'x,'7F'x) == 7
```

BITSET

```
BITSET(string, bit)
```

Sets the specified bit in the string to 1. Bit 0 is the low-order bit of the rightmost byte of the string. This is the inverse of the bitclr (bit clear) function.

Example

```
bitset('0313'x,2) == '0317'x
```

To display this result, encode:

```
say c2x(bitset('0313'x,2))
```

BITTST

```
BITTST(string, bit)
```

Returns a Boolean value of 0 or 1 to indicate the setting of the specified bit in the string. Bit 0 is the low-order bit of the rightmost byte of the string.

Appendix D

Example

```
bittst('0313'x,4) == 1
bittst('0313'x,2) == 0
bittst('0000'x,1) == 0
```

BUFTYPE

```
BUFTYPE()
```

Displays stack contents (usually used for debugging).

Example

```
say buftype() /* displays number of lines and stack buffers */
```

C₂B

```
C2B(string)
```

Converts the character string into a binary string (of 0s and 1s).

Example

```
say c2b('a') == 01100001
say c2b('b') == 01100010
say c2b('A') == 01000001
```

CD or CHDIR

```
CD(directory) or CHDIR(directory)
```

Changes the current directory to the one specified. Return code is 0 if successful; otherwise, the current directory is unchanged and the return code is 1.

```
cd('c:\')  /* changes to C:\ directory under Windows */
rc = cd('xxxxx')  /* assuming directory 'xxxxx' does not exist, displays */
say rc  /* the return code of 1. Current directory not changed */
```

CLOSE

```
CLOSE(file)
```

Closes the file specified by the logical name file. Returns 1 if successful, 0 otherwise (for example, if the file was not open).

Example

```
close('infile') == 1 /* closes the open file */
close('infile') == 0 /* The file was not open when CLOSE was issued. */
```

COMPRESS

```
COMPRESS(string [,list] )
```

Removes all occurrences of the characters specified by list from the string.

If list is omitted, removes all blanks from the string.

Example

```
compress(' a b c d') == 'abcd'
compress('12a3b45c6712d','1234567') == 'abcd'
```

CRYPT

```
CRYPT(string, salt)
```

Returns string as encrypted according to the first two characters of salt. Not supported under all operating systems — in this case, the original string is returned unchanged. The encrypted string is not portable across platforms.

Example

DESBUF

```
DESBUF()
```

Clears the entire stack by removing both lines and buffers. Returns the number of buffers on the stack after the function executes, which should always be 0.

```
say desbuf()     /* all buffers are removed and 0 is returned */
```

DIRECTORY

```
DIRECTORY( [new_directory] )
```

If issued without an input parameter, this function returns the current working directory.

If the new_directory is specified, the current directory of the process is changed to it and the new_directory is returned. If the new_directory does not exist, the current directory is unchanged and the null string is returned.

Example

DROPBUF

```
DROPBUF([number])
```

If called without a parameter, this removes the topmost buffer from the stack. If no buffers were in the stack, it removes all strings from the stack.

If called with a number that identifies a valid buffer number, that buffer and all strings and buffers above it are removed. Strings and buffers below the buffer number are not changed.

If called with a number that does not identify a valid buffer number, no strings or buffers in the stack are changed.

Returns the number of buffers on the stack, *after* any removal it performs. (This differs from CMS, where the return code is always 0).

EOF

```
EOF(file)
```

Returns 1 if the file is at end of file, 0 otherwise. file is the logical filename assigned at open.

Example

```
say eof('infile') == 1 /* file is open and at EOF */
say eof('infile') == 0 /* file is at not at eof, or not open, etc */
```

EXISTS

```
EXISTS(filename)
```

Tests to see whether the file specified by filename exists. Returns 1 is it does, 0 otherwise.

Example

```
say exists('input.txt') == 1 /* The file exists. */
say exists('none_such.txt') == 0 /* The file does not exist. */
```

EXPORT

```
EXPORT(address, [string] , [length] [,pad] )
```

Overwrites the memory beginning at the 4-byte address in a previously allocated memory area with the string. Returns the number of characters copied.

If length is omitted, the number of characters copied will be the length of string. If length is specified, it determines the number of characters copied. If length is less than the string length, pad is used to specify the pad characters copied.

Be aware that this function attempts to directly overwrite memory at direct addresses. If used improperly it could cause unpredictable effects including program or even operating system failure (depending on the operating system).

WARNING — this function could overwrite and destroy memory contents if improperly used!

```
export('0004 0000'x,'new string') == 10 /* The 10 bytes beginning at address '0004 0000'x are now set to: 'new string'. */
```

FIND

```
FIND(string, phrase)
```

Returns the word number of the first occurrence of phrase in string. Returns 0 if phrase is not found. Multiple blanks between words are treated as one in comparisons. The standard function wordpos performs the same work and should be used instead if possible.

Example

```
find('now is the time','the') == 3
find('now is the time','xxx') == 0
find('now is the time','the time') == 3
```

FORK

```
FORK()
```

Spawns a new child process, which then runs in parallel to the parent.

If successful, it returns the child process ID to the parent and 0 to the child process. If unsuccessful or unsupported on your operating system, it returns 1 to the parent.

Example

FREESPACE

```
FREESPACE(address, length)
```

getspace allocates a block of memory from the interpreter's internal memory pool. freespace returns that space to the system. Returns 1 if successful, 0 otherwise.

GETENV

```
GETENV(environment_variable)
```

Returns the value of the environment_variable or the null string if the variable is not set. This function is obsolete, use the equivalent value function instead. Here is its template:

```
VALUE(environmental_variable,,'SYSTEM')
```

Example

```
/* these two examples retrieve and display the values of the PROMPT and */
/* SYSTEMDRIVE environmental variables, respectively */
say value(PROMPT,,'SYSTEM') == $P$G /* for example */
say value(SYSTEMDRIVE,,'SYSTEM') == C: /* for example */
```

The value function has some operating system dependencies. See system-specific documentation for any differences from the operation shown here.

GETPID

```
GETPID()
```

Returns the process id or PID of the currently running process.

Example

```
say getpid() == 588 /* displays the script's PID, whatever it might be */
```

GETSPACE

```
GETSPACE(length)
```

getspace allocates a block of memory of the given length from the interpreter's internal memory pool. It returns the address of the memory block. freespace returns that space to the system.

GETTID

```
GETTID()
```

Returns the thread id or TID of the currently running process.

Example

```
say gettid() == 1756 /* displays the script's TID, whatever it might be */
```

HASH

```
HASH(string)
```

Returns the hash value of the string as a decimal number.

Example

```
say hash('abc') == 38
say hash('abd') == 39
```

IMPORT

```
IMPORT(address [,length] )
```

Returns a string of the given length by copying data from the 4-byte address. If length is omitted, copies until the null byte is encountered. Coding the length is highly recommended.

Example

```
import('0004 0000'x,8) /* returns the 8-byte string at address '0004 0000'x */
```

INDEX

```
INDEX(haystack, needle [,start])
```

Returns the character position of needle within string haystack. Returns 0 if needle is not found.

If specified, start tells where in haystack to initiate the search. It defaults to 1 if not specified.

The standard pos function should be used instead of index if possible.

JUSTIFY

```
JUSTIFY(string, length [,pad])
```

Evenly justifies words within a string. The length specifies the length of the returned string, while pad specifies what padding to insert (if necessary). pad defaults to blank.

Example

MAKEBUF

```
MAKEBUF()
```

Creates a new buffer at the top of the current stack. Buffers are assigned numbers as created, starting at 1. Returns the number of the newly created buffer.

Example

OPEN

```
OPEN(file, filename, ['Append' | 'Read' | 'Write'] )
```

Opens the filename for the specified processing type. Returns 1 if successful, 0 otherwise.

file is a logical name by which the opened file will be referenced in subsequent functions (for example, readch, readln, writech, writeln, seek, and close).

POOLID

```
POOLID()
```

Returns the current variable pool level at the same depth as the call stack. This function enables you to get directly at unexposed variables from a subroutine from the parent hierarchy using the value built-in function. Using it, you can get or set variables.

Example

POPEN

```
POPEN(command [,stem])
```

Runs the operating system <code>command</code> and optionally places its results (from standard output) into the array denoted by <code>stem</code>. Note that the <code>stem</code> should be specified with its trailing period. <code>stem.0</code> will be set to the number of output lines in the array.

The ANSI-1996 address instruction should be used instead if possible. address with can also capture standard error from the command, which popen does not do.

Example

```
popen('dir', 'dir_list.') /* returns DIR results in dir_list array */
```

Use instead:

```
ddress system 'dir' with output stem dir_list. /* stem name ends w/ period */

/* dir_list.0 tells how many items were placed in the array by the command */
/* to process the command's output (in the array), run this code.... */
do j = 1 to dir_list.0
    say dir_list.j
end
```

RANDU

```
RANDU([seed])
```

Returns a pseudo-random number between 0 and 1. seed optionally initializes the random generator.

Example

```
randu() /* returns a random number between 0 and 1
with precision equal to the current value
of NUMERIC DIGITS */
```

Use the ANSI-1996 function random instead for greater portability and standards compliance.

READCH

```
READCH(file, length)
```

Reads and returns length number of characters from the logical filename file. Fewer characters than length could be returned if end of file is reached.

Example

```
readch('infile',10) /* returns the next 10 characters from the file */
```

READLN

```
READLN(file)
```

Reads the next line from the input file. The line read does not include any end of line character(s) (aka the *newline*).

Example

```
readln('infile') /* returns the next of line data, sans newline */
```

RXFUNCADD

```
RXFUNCADD(external_name, library, internal_name)
```

Registers an external function for use by the script. library is the name of the external function library. Under Windows, this will be a *dynamic link library* or DLL. Under Linux, Unix, and BSD, this will be a *shared library* file.

Appendix D

Make sure that the operating system can locate the library file. For Windows, library must reside in a folder within the PATH. For Linux, Unix, and BSD, the name of the environmental variable that points to the shared library file will vary by the specific operating system. LD_LIBRARY_PATH, LIBPATH, and SHLIB_PATH are most common. Check your operating system documentation if necessary to determine the name of this environmental variable.

Returns 0 if registration was successful.

Example

```
/* this registers external function SQLLoadFuncs from REXXSQL library for use */
rxfuncadd('SQLLoadFuncs', 'rexxsql', 'SQLLoadFuncs')
```

RXFUNCDROP

```
RXFUNCDROP(external_name)
```

Removes the external function name from use. Returns 0 if successful.

Example

```
rxfuncdrop('SQLLoadFuncs') /* done using this external library */
```

RXFUNCERRMSG

```
RXFUNCERRMSG()
```

Returns the error message from the most recently issued call to rxfuncadd.

Use this function to determine what went wrong in issuing a rxfuncadd.

Example

```
rxfuncerrmsg() /* returns the rxfuncadd error message */
```

RXFUNCQUERY

```
RXFUNCQUERY(external_name)
```

If the external_name is already registered for use, returns 0. Otherwise returns 1.

```
rxfuncquery('SQLLoadfuncs') /* returns 0 if registered and usable */
```

RXQUEUE

```
RXQUEUE(command [,queue])
```

Gives control commands to the external data queue or stack. This controls Regina's extended external data queue facility.

Commands:

- □ C—Creates a named queue and returns its name. Queue names are not case-sensitive.
- □ Deletes the named queue.
- ☐ G—Gets the current queue name.
- □ S—Sets the current queue to the one named. Returns the name of the *previously current* queue.
- □ T—Sets the timeout period to wait for something to appear in the named queue. If 0, the interpreter never times out . . . it waits forever for something to appear in the queue. Time is expressed in milliseconds.

Please refer to the Regina documentation for further information and examples.

SEEK

```
SEEK(file, offset, ['Begin' | 'Current' | 'End'] )
```

Moves the file position pointer on the logical file specified by file, specified as an offset from an anchor position. Returns the new file pointer position. Note that Rexx starts numbering bytes in a file at 1 (not 0), but AREXX-based functions like seek start numbering bytes from 0. The first byte in a file according to the seek function is byte 0!

Example

```
seek('infile',0,'E') /* returns number of bytes in file    */
seek('infile',0,'B') /* positions to beginning of the file */
seek('infile',5,'B') /* positions to character 5 off the file's beginning */
```

SHOW

```
SHOW(option, [name] , [pad] )
```

Returns the names in the resource list specified by option. Or, tests to see if an entry with the specified name is available.

Appendix D

Possible options are:

- ☐ Clip The Clip list
- ☐ Files—Names of currently open logical files
- ☐ Libraries Function libraries or function hosts
- ☐ Ports—System Ports list

Files is available on all platforms; other options are valid only for the Amiga and AROS.

Example

```
say show('F') == F STDIN infile STDERR STDOUT
/* this shows that the file referred to by the logical name INFILE is open */
```

SLEEP

```
SLEEP(seconds)
```

Puts the script to sleep (in a wait state) for the specified time in seconds. Useful to pause a script.

Example

```
sleep(3) /* script sleeps for 3 seconds */
sleep(10) /* script sleeps for 10 seconds */
```

STATE

```
STATE(streamid)
```

If the ${\tt streamid}$ exists, returns 0. Otherwise returns 1.

Better portability is possible with the command:

```
stream(streamid, 'C', 'QUERY EXISTS')
```

```
state('xxxx') == 1 /* assuming this STREAMID does not exist */
state('infile') == 0 /* assuming this STREAMID exists */
```

STORAGE

```
STORAGE([address], [string], [length], [pad])
```

With no arguments, returns the amount of available system memory. If address is specified (as a 4-byte address), copies the string into memory at that address. The number of bytes copied is specified by length, or else it defaults to the length of the string. pad is used if length is greater than the length of string. Returns the previous contents of the memory before it is overwritten.

Be aware that this function attempts to directly overwrite memory at direct addresses. If used improperly it could cause unpredictable effects including program or operating system failure (depending on the operating system).

Example

```
say storage()  /* displays the amount of available system memory */
storage('0004 0000'x,'new string')
/* the memory at location '0004 0000'x is overwritten with 'new string'
and its previous contents are returned */
```

WARNING — this function could overwrite and destroy memory contents if improperly used!

STREAM

```
STREAM(streamid, [,option [,command]])
```

stream is part of the ANSI-1996 standard, but Regina adds dozens of commands to it. These commands permit opening, closing, and flushing files; positioning read or write file pointers; setting file access modes; and, returning information about the file or its status. See the Regina documentation for full details.

TRIM

```
TRIM(string)
```

Returns string with any trailing blanks removed. The strip function can achieve the same result and is more standard.

```
trim('abc ') == 'abc'
```

UNAME

```
UNAME([option])
```

Returns platform identification information, similar to the uname command of Linux, Unix, and BSD.

Options:

- □ A (All) Returns all information. The default.
- ☐ S (System) Returns the name of the operating system
- □ N (Nodename) Returns the machine or node name
- R (Release) Returns the release of the operating system
- □ V (Version) Returns the version of the operating system
- ☐ M (Machine) Returns the hardware type

Example

UNIXERROR

```
UNIXERROR (error_number)
```

Returns the textual error message associated with the error_number. Since this function interfaces to operating system services, the error text returned is operating-system-dependent.

Example

```
unixerror(5) == Input/output error  /* under Windows XP, */
unixerror(7) == Arg list too long  /* for example */
```

UPPER

```
UPPER(string)
```

Returns string translated to uppercase. Duplicates the function of the standard function translate(string).

Example

```
say upper('abc') == 'ABC'
say upper('AbCd') == 'ABCD'
```

USERID

```
USERID()
```

Returns the name of the current user (his or her userid). If the platform cannot provide it, this function returns the null string.

Example

```
/* here's a Windows example, running under the Administrator */
userid() == Administrator

/* here's a Linux example for regular userid: bossman */
userid() == bossman
```

WRITECH

```
WRITECH(file, string)
```

Writes the string to the logical filename file and returns the number of bytes written.

Example

```
writech('outfile','hi') /* writes string 'hi' to the file and returns 2 */
```

WRITELN

```
WRITELN(file)
```

Writes the string to the logical file specified by file with the end of line character(s) or *newline* appended. Returns the number of bytes written, including the newline.

Example

```
writeln('outfile','hi2') /* writes string 'hi2' to the file and returns 4 (since this value includes the newline) */
```



Mainframe Extended Functions

This appendix provides a reference to the extended functions of VM/CMS and OS TSO/E Rexx. It excludes the dozen or so Double-Byte Character Set (DBCS) functions. This appendix as intended as a quick reference guide for developers, so please see the IBM mainframe Rexx manuals for full details: VM REXX Reference, or TSO/E REXX Reference. You can download them from www.RexxInfo.org.

Each entry is identified by the name of the function. Entries contain a template of the function, showing its arguments, if any. Optional arguments are enclosed in brackets ([]). The template is followed by a description of the function and its use, the function's arguments, and possible return codes.

Coding examples show how to code each function. We have noted where the functions differ under VM/CMS versus TSO/E Rexx.

EXTERNALS

EXTERNALS ()

For VM, returns the number of lines (or elements) in the terminal input buffer. This is the number of logical typed-ahead lines.

Example

externals() == 0 /* if no lines are present */

For OS TSO/E, this function has no meaning since there is no terminal input buffer. Under OS TSO/E, this function always returns 0.

Example

externals() == 0 /* Under OS/TSO, 0 is ALWAYS returned */

FIND

```
FIND(string, phrase)
```

Returns the word number of the first occurrence of phrase in string. Returns 0 if phrase is not found. Multiple blanks between words are treated as one in comparisons. The ANSI-1996 standard function wordpos performs the same work and should be used instead when possible.

Example

```
find('now is the time','the') == 3
find('now is the time','xxx') == 0
find('now is the time','the time') == 3
```

INDEX

```
INDEX(haystack, needle [,start])
```

Returns the character position of needle within string haystack. Returns 0 if needle is not found. If specified, start tells where in haystack to initiate the search. It defaults to 1 if not specified. The ANSI-1996 standard pos function is preferred over index.

Example

```
index('this','x') == 0  /* not found */
index('this','hi') == 2
index('thisthisthis','hi') == 2  /* returns position of first occurrence */
```

JUSTIFY

```
JUSTIFY(string, length [,pad])
```

Evenly justifies words within a string. The length specifies the length of the returned string, while pad specifies what padding to insert (if necessary). pad defaults to blank. The ANSI-1996 standard right and left functions can be used as alternatives to justify.

Example

LINESIZE

```
LINESIZE()
```

Under VM, returns the current terminal line width (the point at which the language processor breaks lines displayed by the say instruction). It returns 0 in these cases:

- ☐ Terminal line size cannot be determined.
- □ Virtual machine is disconnected.
- ☐ The command CP TERMINAL LINESIZE OFF is in effect.

Example

Under OS TSO/E, if the script runs in foreground, returns the current terminal line width minus 1 (the point at which the language processor breaks lines displayed by the say instruction). If the script runs in background, this function always returns 131. In non-TSO/E address spaces, this function returns the logical record length of the OUTDD file (default is SYSTSPRT).

Example

```
linesize()  /* if the script is running in foreground, returns terminal width */
linesize() == 131 /* script is running in background */
```

USERID

```
USERID()
```

Returns the name of the current user (his or her userid).

Example

```
userid() == ZHBF01 /* if the login id were ZHBF01 */
```

Under OS, if the script is running in a non-TSO/E address space, this function returns either the userid specified, the stepname, or the jobname.



Rexx/SQL Functions

This appendix provides a reference to all Rexx/SQL functions, as defined by the product documentation for Rexx/SQL version 2.4. This appendix is intended as a quick reference guide for developers, so see the product documentation if more detailed information is required. Chapter 15 tells where to obtain this documentation.

Each of the following entries is identified by the name of the function. Entries contain a template of the function, showing its arguments, if any. Optional arguments are enclosed in brackets ([]). The template is followed by a description of the function and its use and the function's arguments. Coding examples show how to code each function. All Rexx/SQL functions return 0 upon success unless otherwise noted.

SQLCLOSE

```
SQLCLOSE ( statement_name )
```

Closes a cursor. Frees associated locks and resources.

statement_name — The statement identifier

Example

```
if SQLClose(s1) <> 0 then call sqlerr 'During close'
```

SQLCOMMAND

```
SQLCOMMAND( statement_name, sql_statement [,bind1[,bind2[,...[,bindN]]]] )
```

Immediately executes an SQL statement.

Appendix F

Bind values may optionally be passed for DML statements, if the database permits them. Bind values may not be passed for DDL statements. The format for bind variables is database-dependent.

 $statement_name - Names$ the SQL statement. For SELECTs, names a stem for an array that will receive statement results

```
sql_statement — A SQL DDL or DML statement
bindl...bindN — The bind variables
```

Variable sqlca.rowcount is set by this function to the number of rows affected by DML statements.

Example

For a SELECT statement:

```
rc = sqlcommand(s1, "select deptno, dept_desc from dept_table")
```

Variables s1.deptno.0 and s1.dept_desc.0 will both be set to the number of rows returned. Variables s1.deptno.1 and s1.dept_desc.1 will contain values retrieved for these respective columns for the first row, variables s1.deptno.2 and s1.dept_desc.2 will contain values retrieved for these respective columns from the second row, and so on.

Example

For a DDL statement:

```
sqlstr = 'create table phonedir (lname char(10), phone char(8))'
if SQLCommand(c1,sqlstr) <> 0 then call sqlerr 'During create table'
```

SQLCOMMIT

```
SQLCOMMIT()
```

Permanently applies (or commits) the pending update to the database.

Example

```
if SQLCommit() <> 0 then call sqlerr 'On commit'
```

SQLCONNECT

```
SQLCONNECT( [connection_name], [username], [password], [database], [host] )
```

Creates a new connection to the database. This becomes the default database connection. Which parameters are required, and what their values are, is database-dependent.

connection_name — Names the connection. Required if more than one connection will be open simultaneously.

username — User ID for the connection.

password—User ID's password.

database — Name of the database to connect to.

host — Host on which the database resides. This string is system-dependent.

Example

Oracle — All parameters are optional:

DB2—Only the database name is required:

```
rc = sqlconnect('MYCON',,,'SAMPLE')
```

MySQL—Only the database name is required:

```
if SQLConnect(,,,'mysql') <> 0 then call sqlerr 'During connect'
```

SQLDEFAULT

```
SQLDEFAULT( [connection_name] )
```

If connection_name is specified, sets the default database connection to it.

If connection_name is not specified, returns the current connection name.

connection name — The name of the database connection to set the default to. Optional.

SQLDESCRIBE

```
SQLDESCRIBE( statement_name [,stem_name] )
```

Run after a SQLPREPARE statement, describes the expressions returned by a SELECT statement. Creates a compound variable for each column in the select list of the SQL statement. The stem consists of statement_name, followed by the constant "COLUMN" and one of the following attributes:

- □ NAME Column name
- ☐ TYPE Column's datatype (a database-specific string)

Appendix F

- ☐ SIZE—Column's size
- □ SCALE The overall size of the column
- ☐ PRECISION—Column's precision (the number of decimal places)
- □ NULLABLE 1 if the column is nullable, 0 otherwise

The values returned are database-dependent.

```
statement_name — The statement identifier
```

stem_name — Optional stem name for any variables created to return the information

Note that the columns returned by this function can be determined by calling the SQLGETINFO function with the DESCRIBECOLUMNS argument.

Example

```
rc = sqlprepare(s1,"select deptno, dept_desc from dept_table")
rc = sqldescribe(s1,"fd")
```

This code sequence might result in the following Rexx variables:

SQLDISCONNECT

```
SQLDISCONNECT( [connection_name] )
```

Closes a database connection and all open cursors for that connection.

connection_name — The name of the connection specified in SQLCONNECT, if any.

Example

```
if SQLDisconnect() <> 0 then call sqlerr 'During disconnect'
```

SQLDISPOSE

```
SQLDISPOSE( statement_name )
```

Deallocates a work area originally allocated by a SQLPREPARE statement. Implicitly closes any associated cursor.

statement_name — The SQL statement identifier

Example

```
if SQLDispose(s1) <> 0 then call sqlerr 'During dispose'
```

SQLDROPFUNCS

```
SQLDROPFUNCS(['UNLOAD'])
```

Terminates use of Rexx/SQL and frees resources. The inverse of SQLLOADFUNCS. If the UNLOAD string is coded as the only argument, all Rexx/SQL functions are removed from memory. Use this function with caution as this can affect other running Rexx/SQL programs or other running threads in the current program.

Example

```
if SQLDropFuncs('UNLOAD') <> 0 then
    say 'sqldropfuncs failed, rc: ' rc
```

SQLEXECUTE

```
SQLEXECUTE( statement_name [,bind1[,bind2[,...[,bindN]]]] )
```

Executes a previously "prepared" INSERT, UPDATE, or DELETE statement. The sequence of Rexx/SQL functions to execute these SQL statements in discrete steps would therefore be: SQLPREPARE, SQLEXECUTE, and SQLDISPOSE.

 $\verb|statement_name| - Identifies the SQL statement.$

bind1...bindN—Bind variables. Notation is database-dependent.

Variable sqlca.rowcount is set to the number of rows affected by the DML statement.

SQLFETCH

```
SQLFETCH( statement_name, [number_rows] )
```

Fetches the next row for an open cursor. If number_rows is specified, it can return more than one row.

For one-row fetches, a compound variable is created for each column name identified in the SQL statement. The stem is the statement name, and the tail is the column name.

For multiple-row fetches, a Rexx array is created for each column name in the SQL statement.

```
\verb|statement_name| - The statement identifier
```

number_rows — An optional parameter that specifies how many rows to fetch

Returns 0 when there are no more rows to fetch. Otherwise, returns a positive integer.

Example

Here is a complete example of preparing a cursor, opening the cursor, fetching all rows from the cursor SELECT, and closing the cursor:

```
sqlstr = 'select * from phonedir order by lname'
if SQLPrepare(s1,sqlstr) <> 0 then call sqlerr 'During prepare'

if SQLOpen(s1) <> 0 then call sqlerr 'During open'

/* this loop displays all rows from the SELECT statement  */

do while SQLFetch(s1) > 0
    say 'Name:' s1.lname 'Phone:' s1.phone
end
if SQLClose(s1)  <> 0 then call sqlerr 'During close'
```

SQLGETDATA

```
SQLGETDATA(statement_name, column_name, [start_byte], [number_bytes] [,file_name])
```

Extracts column data from column_name in the fetched row. The data is returned in a Rexx compound variable, unless file_name is specified, in which case it is written to a file.

```
statement_name — Identifies the SQL statement
column_name — Specifies to column data to return
start_byte — Optionally specifies the starting byte from which to return column data
number_bytes — Optionally specifies the number of bytes to retrieve
```

file_name — If specified, names the file into which complete column contents are written

Returns 0 when there is no more data to retrieve. Otherwise, returns the number of bytes retrieved.

You can usually code SQLFETCH and then reference columns by their compound or stem variable names without explicitly invoking SQLGETDATA. See the entry under "SQLFETCH" earlier in this appendix for a complete example. Please see the Rexx/SQL documentation to see an example of the SQLGETDATA function.

SQLGETINFO

```
SQLGETINFO( [connection_name], variable_name [,stem_name] )
```

Returns information about the database referred to by the connection identified by connection_name.

connection_name — The database connection name. If not present, uses the current connection.

variable_name — Specifies the data to return. Valid values are:

- □ DATATYPES Lists column datatypes supported by the database.
- □ DESCRIBECOLUMNS Lists column attributes supported by the database.
- □ SUPPORTSTRANSACTIONS Returns 1 if the database supports transactions, 0 otherwise.
- \square Supports SQLGETDATA Returns 1 if the database supports the SQLGETDATA function, otherwise returns 0.
- □ DBMSNAME Returns the database name and version.

stem_name — If provided, the information is returned in variables that use this name as their stem. If the information is not provided, this returns a data string.

Example

Get the database version information:

```
if SQLGetinfo(,'DBMSVERSION','desc.') <> 0
    then call sqlerr 'Error getting db version'
    else say 'The database Version is: ' desc.1
```

SQLLOADFUNCS

```
SQLLOADFUNCS()
```

Loads all external Rexx/SQL functions. Call this function after loading it with RXFUNCADD.

Example

Here is a typical code sequence to load and execute the SQLLOADFUNCS function to access the entire Rexx/SQL function library. Be sure that the operating system can locate the external functions by setting the proper environmental variable first:

```
if RxFuncAdd('SQLLoadFuncs','rexxsql', 'SQLLoadFuncs') <> 0 then
    say 'rxfuncadd failed, rc: ' rc

if SQLLoadFuncs() <> 0 then
    say 'sqlloadfuncs failed, rc: ' rc
```

SQLOPEN

```
SQLOPEN( statement_name [,bind1[,bind2[,...[,bindN]]]] )
```

Opens and instantiates a cursor for SELECT processing. The statement must have previously been prepared by a SQLPREPARE statement.

```
statement_name — The statement identifier.
```

bind1...bindN—Bind variables. Notation is database-dependent.

Example

See the entry under "SQLFETCH" for a complete SELECT cursor-processing example.

```
if SQLOpen(s1) <> 0 then call sqlerr 'During open'
```

SQLPREPARE

```
SQLPREPARE( statement_name, sql_statement )
```

Allocates a work area for a SQL DDL or DML statement and prepares it for processing. A SELECT statement will subsequently be executed by cursor processing (SQLOPEN, SQLFETCH, and SQLCLOSE). All other statements are executed by a subsequent SQLEXECUTE.

```
statement_name — The SQL statement identifier.
```

sql_statement — The SQL statement to prepare. Bind variable notation is database-dependent.

Example

See the entry under "SQLFETCH" for a complete SELECT cursor-processing example.

```
sqlstr = 'select * from phonedir order by lname'
if SQLPrepare(s1,sqlstr) <> 0 then call sqlerr 'During prepare'
```

SQLROLLBACK

```
SQLROLLBACK()
```

Discards and does not apply (rolls back) any pending database updates.

Example

```
if SQLRollback() <> 0 then call sqlerr 'On rollback'
```

SQLVARIABLE

```
SQLVARIABLE( variable_name [,variable_value] )
```

Either returns or sets the specified variable. If variable_value is not present, returns the value of variable_name. If variable_value is present, sets variable_name to that value. Can be used to set various aspects of database behavior.

variable_name — The variable to be set or retrieved. May be implementation-dependent.

variable_value — If coded, the value to set the variable to.

Allowable variable_name codings are:

- □ VERSION (a read-only value) The version of Rexx/SQL with:
 - Package name
 - □ Rexx/SQL version
 - □ Rexx/SQL date
 - □ OS platform
 - Database
- □ DEBUG debugging level:
 - □ 0—No debugging info (default)
 - ☐ 1—Rexx variables are displayed when set
 - □ 2—Displays function entry/exit info
 - ☐ The debugging feature traces internal Rexx/SQL functions and is only useful for Rexx/SQL developers.
- ☐ ROWLIMIT Limits the number of rows fetched by SELECTs run via SQLCOMMAND. The default, 0, means no limit.
- □ LONGLIMIT Maximum number of bytes retrievable via SELECT. Default is 32,786.
- □ SAVESQL—If 1, the variable sqlca.sqltext contains the text of last SQL statement. Defaults to 1.

Appendix F

- □ AUTOCOMMIT Sets database auto-commit ON or OFF (1 is ON, 0 is OFF). Results depend on how the database auto-commit feature works.
- ☐ IGNORETRUNCATE Dictates what action occurs when a column value gets truncated. Default (OFF) results in function failure and error message. ON truncates data with no error.
- □ NULLSTRINGOUT Returns a user-specified string instead of the null string for a NULL column value.
- □ NULLSTRINGIN Enables a user-specified string to represent null columns. Defaults to the null string.
- □ SUPPORTSPLACEMARKERS (a read-only value) Returns 1 if the database supports bind place-holders, 0 otherwise.
- □ STANDARDPLACEMARKERS if 1, enables use of the question mark (?) as the placeholder for databases that support placeholders other than the question mark (?).
- □ SUPPORTSDMLROWCOUNT (a read-only value) Returns 1 if the database returns the number of rows affected by INSERT, UPDATE, and DELETE statements, 0 otherwise.

Example

```
if SQLVariable('AUTOCOMMIT') = 1
    then say 'Autocommit is ON'
    else say 'Autocommit is OFF'

if SQLVariable('SUPPORTSPLACEMARKERS') = 1
    then say 'Database supports bind placeholders'
    else say 'Database does not support bind placeholders'

if SQLVariable('SUPPORTSDMLROWCOUNT') = 1
    then say 'Database supports SQL Row Counts'
    else say 'Database does not support SQL Row Counts'
```



Rexx/Tk Functions

The following table lists the standard Rexx/Tk functions. The table is reproduced from the Rexx/Tk documentation at http://rexxtk.sourceforge.net/functions.html. For further details, please see the Rexx/Tk home page at: http://rexxtk.sourceforge.net/index.html.

Rexx/Tk Function	Tcl/Tk Command
TkActivate(pathName, index)	activate command in various widgets
TkAdd(pathName, type [,options])	menu add
TkAfter(time 'cancel', 'command' id)	after
TkBbox(pathName [,arg])	bbox command in various widgets
TkBind(tag [,sequence [,[+ *]command]]])	bind
TkButton(pathName [,options])	button
TkCanvas(pathName [,options])	canvas
TkCanvasAddtag(pathName, tag [,searchSpec [,arg])	canvas addtag
TkCanvasArc(pathName, x1, y1, x2, y2 [,options])	canvas create arc
$TkCanvasBind(pathName, tagOrId\ [,sequence\ [,[+\ \ ^*]command]]\)$	canvas bind
TkCanvasBitmap(pathName, x, y [,options])	canvas create bitmap
TkCanvasCanvasx(pathName, screenx [,gridspacing])	canvas canvasx
TkCanvasCanvasy(pathName, screeny [,gridspacing])	canvas canvasy
TkCanvasCoords(pathName, tagOrId [,x0, y0,])	canvas coords
TkCanvasDchars(pathName, tagOrId, first [,last])	canvas dchars
TkCanvasDtag(pathName, tagOrId [,deleteTagOrId])	canvas dtag

Table continued on following page

Rexx/Tk Function	Tcl/Tk Command
TkCanvasDelete(pathName [,tagOrId [,tagOrId]])	canvas delete
TkCanvasFind(pathName, searchCommand [,arg])	canvas find
TkCanvasFocus(pathName [,tagOrId])	canvas focus
TkCanvasImage(pathName, x, y [,option])	canvas create image
TkCanvasLine(pathName, x1, y1, x2, y2 [xn, yn [,options]])	canvas create line
TkCanvasOval(pathName, x1, y1, x2, y2 [,options]])	canvas create oval
TkCanvasPolygon(pathName, x1, y1, x2, y2 [xn, yn [,options]])	canvas create polygon
TkCanvasPosctscript(pathName [options])	canvas postscript
TkCanvasRectangle(pathName, x1, y1, x2, y2 [,options]])	canvas create rectangle
TkCanvasText(pathName, x, y [,options]])	canvas create text
TkCanvasType(pathName, tagOrId)	canvas type
TkCanvasWindow(pathName, x, y [,options]])	canvas create window
TkCget(pathName [,arg])	cget command in various widgets
TkCheckButton(pathName [,arg])	checkbutton
TkChooseColor(option [,options])	tk_chooseColor
TkChooseDirectory(option [,options])	tk_chooseDirectory
TkConfig(pathName [,options])	configure command in most all widgets
TkCurSelection(pathName [,arg])	curselection command in various widgets
TkDelete(pathName, start, end)	delete command in various widgets
TkDestroy(pathName)	destroy
TkEntry(pathName [,options])	entry
TkError()	new command — return Rexx/Tk error details
TkEvent(arg [,arg] [,options])	event
TkFocus(pathName [,arg])	focus
TkFontActual(font [,'-displayof', window], arg [,arg])	font actual
TkFontConfig(font [,options])	font configure
TkFontCreate(font [,options])	font create
TkFontDelete(font [,font])	font delete

Rexx/Tk Function	Tcl/Tk Command
TkFontFamilies(['-displayof', window])	font families
TkFontMeasure(font [,'-displayof', window], text)	font measure
TkFontMetrics(font [,'-displayof', window], arg [,arg])	font metrics
TkFontNames()	font names
TkFrame(pathName [,options])	frame
TkGet(pathName)	get command in various widgets
TkGetOpenFile(option [,options])	tk_getOpenFile
TkGetSaveFile(option [,options])	tk_getSaveFile
TkGrab(type, pathName)	grab
TkGrid(pathName [,pathName] [,options])	grid configure
TkGridBbox(pathName [,x, y [,x1, y1]])	grid bbox
TkGridColumnConfig(pathName, index [,options])	grid columnconfigure
TkGridConfig(pathName [,pathName] [,options])	grid configure
TkGridForget(pathName [,pathName])	grid forget
TkGridInfo(pathName)	grid info
TkGridLocation(pathName, x, y)	grid location
TkGridPropagate(pathName [,boolean])	grid propagate
TkGridRowConfig(pathName, index [,options])	grid rowconfigure
TkGridRemove(pathName [,pathName])	grid remove
TkGridSize(pathName)	grid size
TkGridSlaves(pathName [,options])	grid slaves
TkImageBitmap(pathName [,options])	image create bit map
TkImagePhoto(pathName [,options])	image create photo
TkIndex(pathName arg)	index command in various widgets
TkInsert(pathName [,arg])	insert command in various widgets
TkItemConfig(pathName, tagOrId index [,options])	itemconfig command in various widgets
TkLabel(pathName [,options])	label
TkListbox(pathName [,options])	listbox

Appendix G

Rexx/Tk Function	TcI/Tk Command
TkLower(pathName [,belowThis])	lower
TkMenu(pathName [,options])	menu
TkMenuEntryCget(pathName, index, option)	menu entrycget
TkMenuEntryConfig(pathName, index [,options])	menu entryconfigure
TkMenuInvoke(pathName, index)	menu invoke
TkMenuPost(pathName [,arg])	menu post
TkMenuPostCascade(pathName, index)	menu postcascade
TkMenuType(pathName, index)	menu type
TkMenuUnPost(pathName [,arg])	menu unpost
TkMenuYPosition(pathName, index)	menu yposition
TkMessageBox(message,title,type,icon,default,parent)	tk_messageBox
TkNearest(pathName, xOry)	nearest command in various widgets
TkPack(option [,arg,])	pack
TkPopup(arg [,arg])	tk_popup
TkRadioButton(pathName [,arg])	radiobutton
TkRaise(pathName [,aboveThis])	raise
TkScale(pathName [,options])	scale
TkScan(pathName [,args])	scan command in various widgets
TkScrollbar(pathName [,options])	scrollbar
TkSee(pathName, index)	see command in various widgets
TkSelection(pathName [,args])	selection command in various widgets
TkSet(pathName, value)	set command in various widgets
TkSetFileType(type, extension[s])	sets the rtFiletypes Tk variable for use in both TkGetSaveFile() and TkGetOpenFile() as the -filetypes option
TkTcl(arg [,arg])	any tcl command
TkText(pathName [,options])	text

Rexx/Tk Function	TcI/Tk Command
TkTextTagBind(pathName, tagName Amount of the command of t	text tag bind
TkTextTagConfig(pathName, tagName [,option])	text tag configure
TkTopLevel(pathName)	toplevel
TkVar(varName [,value])	Tcl set command — set and retrieve Tk variables
TkVariable(varName [,value])	new command — set/query internal variables
TkWait()	new command — returns the Rexx "command" from widgets when pressed/used
TkWinfo(command [,arg])	winfo
TkWm(option, window [,arg])	wm
TkXView(pathName [,arg])	xview command of various widgets
TkYView(pathName [,arg])	yview command of various widgets
TkLoadFuncs()	N/A
TkDropFuncs()	N/A

The Rexx/Tk library is distributed under the LGPL.

Rexx/Tk Extensions

Rexx/Tk is supplied with a number of extension packages. These extensions enable access to additional Tk widgets written in Tcl and are dynamically loaded by Tcl programmers as required. These widgets are included in the base Rexx/Tk package. They are listed in the following tables.

The tables that follow are reproduced from the Rexx/Tk documentation at http://rexxtk.sourceforge.net/extensions.html. For further details, please see the Rexx/Tk home page at http://rexxtk.sourceforge.net/index.html.

Rexx/Tk Tree Function	Tree widget command	
TkTree(pathName [,options])	Tree:create	
TkTreeAddNode(pathName, name [,options])	Tree:newitem	
TkTreeClose(pathName, name)	Tree:close	
TkTreeDNode(pathName, name)	Tree:delitem	

Table continued on following page

Appendix G

Rexx/Tk Tree Function	Tree widget command	
TkTreeGetSelection(pathName)	Tree:getselection	
TkTreeGetLabel(pathName, x, y)	Tree:labelat	
TkTreeNodeConfig(pathName, name [,options])	Tree:nodeconfig	
TkTreeOpen(pathName, name)	Tree:open	
TkTreeSetSelection(pathName, label)	Tree:setselection	
Items marked with * are base Rexx/Tk functions that can be used with Rexx/Tk extensions.		

Rexx/Tk Combobox Function	
TkCombobox(pathname [,options])	combobox::combobox
*TkBbox(pathName, index)	combobox bbox
TkComboboxICursor(pathName, index)	combobox icursor
TkComboboxListDelete(pathName, first [,last])	combobox list delete
TkComboboxListGet(pathName, first [,last])	combobox list get
TkComboboxListIndex(pathName, index)	combobox list index
TkComboboxListInsert(pathName, index [,args])	combobox list insert
TkComboboxListSize(pathName)	combobox list size
TkComboboxSelect(pathName, index)	combobox select
TkComboboxSubwidget(pathName [name])	combobox subwidget
*TkConfig(pathName [,options])	combobox configure
*TkCurselection(pathName)	combobox curselection
*TkDelete(pathName, first [,last])	combobox delete
*TkGet(pathName)	combobox get
*TkIndex(pathName, index)	combobox index
*TkInsert(pathName, index, string)	combobox insert
*TkScan(pathName [,args])	combobox scan
*TkSelection(pathName [,args])	combobox selection
Items marked with * are base Rexx/Tk functions that can	be used with Rexx/Tk extensions.

Rexx/Tk MCListbox Function	MCListbox widget command
TkMCListbox(pathname [,options])	mclistbox::mclistbox
*TkActivate(pathName, index)	mclistbox activate
*TkBbox(pathName [,arg])	mclistbox bbox
*TkCget(pathName [,arg])	mclistbox cget
*TkConfig(pathName [,options])	mclistbox configure
*TkCurSelection(pathName [,arg])	mclistbox curselection
*TkDelete(pathName, start, end)	mclistbox delete
*TkGet(pathName)	mclistbox get
*TkIndex(pathName arg)	mclistbox index
*TkInsert(pathName [,arg])	mclistbox insert
TkMCListboxColumnAdd(pathName, name [,options])	mclistbox column add
TkMCListboxColumnCget(pathName, name, option)	mclistbox column cget
TkMCL is tbox Column Config (path Name, name~[, options])	mclistbox column configure
TkMCListboxColumnDelete(pathName, name)	mclistbox column delete
TkMCListboxColumnNames(pathName)	mclistbox column names
TkMCListboxColumnNearest(pathName,x)	mclistbox column nearest
TkMCListboxLabelBind(pathName,name,sequence, [* +]command)	mclistbox label bind
*TkNearest(pathName, xOry)	mclistbox nearest
*TkScan(pathName [,args])	mclistbox scan
*TkSee(pathName ???[,options])	mclistbox see
*TkSelection(pathName [,args])	mclistbox selection
*TkXView(pathName [,arg])	mclistbox xview
*TkYView(pathName [,arg])	mclistbox yview
Items marked with * are base Rexx/Tk functions that can be u	used with Rexx/Tk extensions.

The Rexx/Tk Library Extensions are distributed under the LGPL.



Tools, Interfaces, and Packages

As a universal scripting language with worldwide use, Rexx has spawned a large collection of open source and free tools. There are literally too many Rexx tools, utilities, extensions, and interfaces to track them all. This partial list shows some of the available tools and hints at their breadth.

All tools listed here are either open source or free software. Most reside either at SourceForge at www.SourceForge.net or GitHub at www.GitHub.com. Access www.RexxInfo.org for a complete, up-to-date list of tools with links to download them all for free.

Package or Product	Uses
Administration Tool	A "programmer's GUI" and administration aid designed to assist in the development and debugging of Rexx scripts.
Associative Arrays 4 Rexx	Routines that manipulate associative arrays.
Bean Scripting Framework	Allows Java programs to call Rexx scripts, and for Rexx scripts to create and manipulate Java objects.
cgi-lib.rxx (also known as CGI / Rexx)	A library of Common Gateway Interface, or CGI, functions from Stanford Linear Accelerator Center (SLAC). These functions make it easy to retrieve and decode input, send output back to the client, and report the results of diagnostics and errors.

Table continued on following page

Appendix H

Package or Product	Uses
CUR for Rexx	A version of "ObjectCUR for Object REXX" for classic Rexx.
FileRexx Function Library	Functions with new file I/O commands specific to Windows.
FileUt	Scripting interface for standard I/O.
GTK+	Modal dialog manager for Object REXX.
Hack	Hexadecimal editor for Windows with Rexx script capabilities.
HtmlGadgets	Generates code snippets to support HTML coding.
HtmlStrings	Generates HTML code.
HtmlToolBar	Generates code snippets for HTML gadgets.
Internet/REXX HHNS Workbench	A Common Gateway Interface external function library from Henri Henault & Sons, France.
MacroEd	Manages RexxEd macros.
MIDI I/O Function Library	Enables input/output to MIDI ports.
MIDI Rexx Function Library	Read, write, play and record MIDI files.
Mod_Rexx	Applies Rexx to Apache Web page development. Controls all Apache features through Rexx scripts.
ObjectCUR for Object REXX	A cross-platform class library that includes functions for system information, logging, file system control, FTP, Win32 calls, and text file support.
ODBC Drivers	Open Database Connectivity (ODBC) drivers for Microsoft Access databases, dBASE files, or Excel files.
Regular Expressions	Regular expressions for Rexx scripts.
REXREF3	Produces Rexx script cross-reference listings.
Rexx 2 Exe	Converts scripts into a self-running * . exe files.
Rexx Dialog	Creates GUI interfaces for Windows.
Rexx Math Bumper Pack	Math libraries.
Rexx/CURL	Interface to the cURL package for access to URL-addressable resources.
Rexx/Curses	Interface to the curses library for portable character- based user interfaces.
Rexx/DW	Provides a cross-platform GUI toolset, based on the <i>Dynamic Windows</i> package.

Package or Product	Uses
Rexx/gd	Create and manipulate graphics images using the gd library.
Rexx/ISAM	Interface to Indexed Sequential Access Method (ISAM) files.
Rexx/SQL	Interface to all major open-source and commercial SQL databases.
Rexx/Tk	The Tk GUI interface toolkit for cross-platform GUIs for Rexx scripts.
Rexx/Trans	Translates Rexx API calls from an external function package into API calls specific to a particular Rexx interpreter.
Rexx/Wrapper	"Wraps" Rexx scripts into a closed-source, standalone executables.
Rexx2Nrx	Classic Rexx to NetRexx converter.
RexxED	A Rexx-aware editor.
RexxMail	Email client that uses only WPS and Rexx scripts.
RexxRE	Regular expression library for Rexx scripts.
RexxTags	Rexx Server Pages (RSP) compiler for prototyping XML tags in Rexx; an easy way to write XML tags in Rexx.
RexxUtil	IBM's function library for interaction with the environment.
RegUtil	Another implementation of RexxUtil (the Windows version of RexxUtil).
RexxXML	Provides support for XML and HTML files.
RxAcc	Generates code snippets through a keyboard accelerator.
RxBlowFish	Callable DLL implements Blowfish encryption.
RxCalibur	Creates a library of code snippets; aids in reusing this code.
RxComm Serial Add-on	Control/access serial ports from Rexx scripts.
RXDDE	DDE client functions for Rexx under Windows.
RxDlgIDE	An Interactive Development Environment (IDE) designed to work with Rexx Dialog under Windows.
rxJava	Rexx functions for Java.

Table continued on following page

Appendix H

Package or Product	Uses
RxProject	A Rexx script preprocessor that aids in managing scripting projects.
RxRSync	Callable DLL implements Rsync compession/differencing.
RxSock	Interface for TCP/IP sockets.
RxWav	Create and manipulate audio files.
Script Launcher	GUI panel for launching Rexx scripts under Windows.
Speech Function Library	Pronounces synthesized voice.
THE	The Hessling Editor, a cross-platform, Rexx-aware text editor.
W32 Funcs	Functions for Windows Registry access.
Wegina	Windows front end for the Regina interpreter.

Open Object Rexx Classes

These tables list the classes of Open Object Rexx. They are from the section *The Builtin Classes* in the manual *Open Object Rexx Reference*.

Fundamental Classes	
Object Class	The Object class is the root of the class hierarchy. The instance methods of the Object class are, therefore, available on all objects.
Class Class	The Class class is like a factory that produces the factories that produce objects. It is a subclass of the Object class (). The instance methods of the Class class are also the class methods of all classes.
String Class	String objects represent character-string data values. A character string value can have any length and contain any characters.
Method Class	The Method class creates method objects from Rexx source code. It is a subclass of the Object class ().
Routine Class	The Routine class creates routine objects from Rexx source code. It is a subclass of the Object class ().
Package Class	The Package class contains the source code for a package of Rexx code. A package instance holds all of the routines, classes, and methods created from a source code unit and also manages external dependencies referenced by ::REQUIRES directives. The files loaded by ::REQUIRES are also contained in Package class instances. It is a subclass of the Object class ().
Message Class	A message object provides for the deferred or asynchronous sending of a message. You can create a message object by using the new method of the Message class or the start () method of the Object class ().

Appendix I

Stream Classes	
InputStream Class	This class is defined as an abstract mixin class. It must be implemented by subclassing it or inheriting from it as a mixin. Many of the methods in this class are abstract and must be overridden or they will throw a syntax error when invoked.
OutputStream Class	This class is defined as an abstract mixin class. It must be implemented by subclassing it or inheriting from it as a mixin. Many of the methods in this class are abstract and must be overridden or they will throw a syntax error when invoked.
InputOutputStream Class This class is defined as an abstract mixin class. It must be implemented by subclass inheriting from it as a mixin. Many of the methods in this class are abstract and mu overridden or they will throw a syntax error when invoked.	
Stream Class	A stream object allows external communication from Rexx. (See a discussion of ooRexx input and output.)

Collection Classes		
Collection Class	The Collection class is a mixin class that defines the basic set of methods implemented by all Collections. Many of the Collection class methods are abstract and must be implemented the inheriting subclasses.	
MapCollection Class	The MapCollection class is a mixin class that defines the basic set of methods implemented by all collections that use create a mapping from an index object to a value.	
OrderedCollection Class	The OrderedCollection class is a mixin class that defines the basic set of methods implemented by all collections that have an inherent index ordering, such as an array or a list.	
SetCollection Class	This is a tagging mixin class only and does not define any methods of its own. Collections that implement SetCollection are MapCollections that constrain the index and item to be the same object.	
Array Class	An array is a possibly sparse collection with indexes that are positive whole numbers. You can reference array items by using one or more indexes. The number of indexes is the same as the number of dimensions of the array. This number is called the dimensionality of the array.	
Bag Class	A bag is a non-sparse collection that restricts the elements to having an item that is the same as the index. Any object can be placed in a bag, and the same object can be placed in a bag several times.	
The CircularQueue class allows for storing objects in a circular queue of a predefined size the end of the queue has been reached, new item objects are inserted from the beginning replacing earlier entries. Any object can be placed in the queue and the same object can be more than one position in the queue.		
Directory Class	A Directory is a MapCollection using unique character string indexes. The items of the collection can be any valid Rexx object.	
List Class	A list is a non-sparse sequenced collection similar to the Array class () to which you can add new items at any position in the sequence. The List creates a new index value whenever an item is added to the list and the associated index value remains valid for that item regardless of other additions or removals. Only indexes the list object generates are valid i.e. the list is never a sparse list and the list object will not modify indexes for items in the list.	

Properties Class	A properties object is a collection with unique indexes that are character strings representing names and items that are also restricted to character string values. Properties objects are useful for processing bundles of application option values.	
Queue Class	A queue is a non-sparse sequenced collection with whole-number indexes. The indexes specify the position of an item relative to the head (first item) of the queue. Adding/removing an item changes the association of an index to its queue item. You can add items at either the tail or head of the queue.	
Relation Class	A relation is a collection with indexes that can be any object. In a relation, each item is associated with a single index, but there can be more than one item with the same index (unlike a table, which can contain only one item for any index).	
Set Class	A Set is a collection containing member items where the index is the same as the item (similar to a Bag collection). Any object can be placed in a set. There can be only one occurrence of any object in a set (unlike a Bag collection). Item equality is determined by using the == method.	
Stem Class	A stem object is a collection with unique indexes that are character strings.	
Table Class	A table is a collection with indexes that can be any object. In a table, each item is associated with a single index, and there can be only one item for each index (unlike a relation, which can contain more than one item with the same index). Index equality is determined by using the == method.	
Identity Table Class	An identity table is a collection with indexes that can be any object. In an identity table, each item is associated with a single index, and there can be only one item for each index. Index and item matche in an identity table are made using an object identity comparison. That is, an index will only match it the same instance is used in the collection.	

Utility Classes		
DateTime Class	A DateTime object represents a point in between 1 January 0001 at 00:00.000000 and 31 December 9999 at 23:59:59.999999. A DateTime object has methods to allow formatting a date or time in various formats, as well as allowing arithmetic operations between dates.	
Alarm Class	An alarm object provides timing & notification capability by supplying a facility to send any message to any object at a given time. Alarms are cancellable before messaging.	
TimeSpan Class	A TimeSpan object represents a point in between 1 January 0001 at 00:00.000000 and 31 December 9999 at 23:59:59.999999. A TimeSpan object has methods to allow formatting a date or time in various formats, as well as allowing arithmetic operations between dates.	
Comparable Class	This class is defined as a mixin class.	
Orderable Class	The Orderable class can be inherited by classes which wish to provide each of the comparison operator methods without needing to implement each of the individual methods. The inheriting class need only implement the Comparable compareTo() method (). This class is defined as a mixin class.	
Comparator Class	The Comparator class is the base class for implementing Comparator objects that can be used with the Array sortWith() () or stableSortWith() method (). The compare() method implements some form of comparison that determines the relative ordering of two objects. Many Comparator implementations are specific to particular object types.	
CaselessComparator Class	The CaselessComparator class performs caseless orderings of String objects.	
ColumnComparator Class	The ColumnComparator class performs orderings based on specific substrings of String objects.	

CaselessColumn- Comparator Class	The CaselessColumnComparator class performs caseless orderings of specific substrings of String objects.	
DescendingComparator Class	The DescendingComparator class performs sort orderings in descending order. This is the inverse of a Comparator () sort order.	
CaselessDescending- Comparator Class	The CaselessDescendingComparator class performs caseless string sort orderings in descending order. This is the inverse of a CaselessComparator () sort order.	
InvertingComparator Class	The InvertingComparator class inverts the comparison results of another Comparator object to reverse the resulting sort order.	
Monitor Class	The Monitor class acts as a proxy for other objects. Messages sent to the Monitor object are forwarded to a different target object. The message target can be changed dynamically.	
MutableBuffer Class	The MutableBuffer class is a buffer on which certain string operations such as concatenation can be performed very efficiently. Unlike String objects, MutableBuffers can be altered without requiring a new object allocation. A MutableBuffer object can provide better performance for algorithms that involve frequent concatenations to build up longer string objects because it creates fewer intermediate objects.	
RegularExpression Class	This class provides support for regular expressions. A regular expression is a pattern you can use to match strings.	
RexxQueue Class	The RexxQueue class provides object-style access to Rexx external data queues.	
Supplier Class	You can use a supplier object to iterate over items of a collection. Supplier objects are created from a snapshot of a collection. The iteration results are not affected by later changes to the source collection object.	
StreamSupplier Class	A subclass of the Supplier class () that will provided stream lines using supplier semantics. This allows the programmer to iterate over the remaining lines in a stream. A StreamSupplier object provides a snapshot of the stream at the point in time it is created, including the current line read position. In general, the iteration is not effected by later changes to the read and write positioning of the stream. However, forces external to the iteration may change the content of the remaining lines as the iteration progresses.	
RexxContext Class	Gives access to context information about the currently executing Rexx code. Instances of the RexxContext class can only be obtained via the .CONTEXT environment symbol. They cannot be directly created by the user. It is a subclass of the Object class ().	
A WeakReference instance maintains a non-pinning reference to another object. A pinning reference does not prevent an object from getting garbage collected or have uninit method run when there are no longer normal references maintained to the Once the referenced object is eligible for garbage collection, the reference inside the WeakReference instance will be cleared and the VALUE method will return initiately subsequent calls. WeakReferences are useful for maintaining caches of objects with preventing the objects from being reclaimed by the garbage collector when needed		
Pointer Class	A Pointer instance is a wrapper around a native pointer value. This class is designed for writing methods and functions in native code and can only be created using the native code application programming interfaces. This class new method will raise an error if invoked.	
Buffer Class	A Buffer instance is a Rexx interpreter managed block of storage. This class is designed primarily for writing methods and functions in native code and can only be created using the native code APIs. The Buffer class new method will raise an error if invoked.	
File Class	The File class provides services which are common to all the filesystems supported by ooRexx. A File object represents a path to a file or directory. Path is relative or absolute.	

Mod_Rexx: Functions and Special Variables

This appendix lists the Mod_Rexx functions and special variables. Mod_Rexx is the package that permits Rexx scripts to control all aspects of the popular open source Apache Web server product. Chapter 17 describes Mod_Rexx and demonstrates how to script it. See that chapter for a full product description and sample program.

General Functions

These functions provide a base level of services necessary to work with the Apache Web server. They manage cookies and the error log, retrieve environmental information, and handle URLs.

General Function	Use
WWWAddCookie	Set a new cookie for the browser
WWWConstruct_URL	Return a URL for the specified path
WWWEscape_Path	Convert a path name to an escaped URL
WWWGetArgs	Get the GET/POST arguments
WWWGetCookies	Get the GET/POST cookies
WWWGetVersion	Get the Mod_Rexx version
WWWHTTP_time	Get the current RFC 822/1123 time
WWWInternal_Redirect	Create a new request from the specified URI
WWWLogError	Log an error message to Apache log file
WWWLogInfo	Log an informational message to Apache log file

Table continued on following page

Appendix J

General Function	Use
WWWLogWarning	Log a warning message to Apache log file
WWWRun_Sub_Req	Run an Apache subrequest
WWWSendHTTPHeader	Set the MIME content, and send HTTP header
WWWSetHeaderValue	Set a new value for a cookie.
WWWSub_Req_Lookup_File	Run subrequest on a filename
WWWSub_Req_Lookup_URI	Run subrequest on a URI

Apache Request Record Functions

These functions provide information about and manage the request record pointer, information coming into the script from Apache and the Web.

Apache Request Record Function	Use
WWWReqRecConnection	Return connection record pointer
WWWReqRecNext	Return next request record pointer
WWWReqRecPrev	Return previous request record pointer
WWWReqRecMain	Return main request record pointer
WWReqRecIsMain	Return 1 if this is the main request
WWWReqRecThe_request	Return the request
WWWReqRecProxyreq	Return 1 if this is a proxy request
WWWReqRecServer	Return the server record pointer
WWWReqRecHeader_only	Always returns 0
WWWReqRecProtocol	Return request HTTP protocol
WWWReqRecBytes_sent	Return bytes sent field
WWWReqRecArgs	Return args field
WWWReqRecFinfo_stmode	Return finfo stmode field
WWWReqRecUsern	Return user's login name
WWWReqRecAuth_type	Return authentication type

Updatable Apache Request Record Functions

These functions manage the request record pointer and allow updating values as well as retrieving them.

Updateable Request Record Function	Use
WWWReqRecStatus_line	Return or set status line field
WWWReqRecStatus	Return or set status field
WWWReqRecMethod	Return or set method field
WWWReqRecMethod_number	Return or set method number field
WWWReqRecAllowed	Return or set allowed field
WWWReqRecHeader_in	Return or set values in bytes headers in field
WWWReqRecHeader_out	Return or set values in bytes headers out field
WWWReqRecErr_header_out	Return or set values in bytes error headers out field
WWWReqRecSubprocess_env	Return or set values in subprocess environment
WWWReqRecNotes	Return or set values in the notes
WWWReqRecContent_type	Return or set content type field
WWWReqRecContent_encoding	Return or set content encoding field
WWWReqRecHandler	Return or set handler field
WWWReqRecContent_languages	Return or set content languages field
WWWReqRecNo_cache	Return or set no_cache field
WWWReqRecUri	Return or set URI field
WWWReqRecFilename	Return or set filename field
WWWReqRecPath_info	Return or set path_info field

Apache Server Record Functions

These functions manage server-side concerns pertaining to Apache and its environment.

Server Record Function	Use
WWWSrvRecServer_admin	Return server admin email address
WWWSrvRecServer_hostname	Return server hostname
WWWSrvRecPort	Return server listening port
WWWSrvRecIs_virtual	Return non-zero for a virtual server
WWWCnxRecAborted	Return non-zero for a virtual server

Special Variables

Mod_Rexx uses a set of three dozen *special variables* to communicate information to Rexx scripts. The names of these variables all begin with the letters www. These special variables are set either before the script starts, or after the script executes a function call. Their purpose is to communicate information to the script either about the environment or the results of function calls. Here are the Mod_Rexx special variables:

Special Variable	Use
WWWARGS.0	Number of arguments passed to the script for GET or PUT requests (set by invoking function WWWGetArgs)
WWWARGS.n.!NAME and WWWARGS.n.!VALUE	Argument list passed to the script, formatted as per GET or POST (set by invoking function WWWGetArgs)
WWWAUTH_TYPE	Authentication method
WWWCONTENT_LENGTH	Length of client data buffer
WWWCONTENT_TYPE	Content type of data
WWWCOOKIES.0	Number of cookies passed to the script (set by invoking function WWWGetCookies)
WWWCOOKIES.n.!NAME and WWWCOOKIES.n.!VALUE	List of name=value cookie pairs passed to the script (set by invoking function WWWGetCookies)
WWWDEFAULT_TYPE	Value of DefaultType directive or text/plain if not configured
WWWFILENAME	Fully qualified filename, translated from the server's URI
WWWFNAMETEMPLATE	Temporary filename template that will be passed to Mod_Rexx
WWWGATEWAY_INTERFACE	Name and version of gateway interface
WWWHOSTNAME	Hostname in the URI
WWWHTTP_USER_ACCEPT	List of acceptable MIME types
WWWHTTP_USER_AGENT	Client browser type and version
WWWIS_MAIN_REQUEST	Always 1
WWWPATH_INFO	Script's file name
WWWPATH_TRANSLATED	Script's fully qualified path and file name
WWWPOST_STRING	Unparsed name/value pairs from browser if POST request (set by invoking function WWWGetArgs)

Mod_Rexx: Functions and Special Variables

Special Variable	Use
WWWQUERY_STRING	Unparsed QUERY_STRING portion of the URI for ${\tt GETS}$
WWWREMOTE_ADDR	Host's TCP/IP address
WWWREMOTE_HOST	Host's DNS name (if available)
WWWREMOTE_IDENT	Remote user name
WWWREMOTE_USER	Authenticated username
WWWREQUEST_METHOD	Request method, either GET or POST
WWWRSPCOMPILER	REXX RSP compiler program name
WWWSCRIPT_NAME	Fully qualified URI path and name of the script or RSP file
WWWSERVER_NAME	Server host name
WWWSERVER_ROOT	Server's root path
WWWSERVER_PORT	Server's port number
WWWSERVER_PROTOCOL	Request HTTP protocol version
WWWSERVER_SOFTWARE	Name and version of the WWW server software
WWWUNPARSEDURI	Unparsed portion of the request URI
WWWURI	Full request URI



NetRexx: Quick Reference

This appendix provides a quick summary of NetRexx. For full authoritative reference, see the book *The NetRexx Language* by Michael Cowlishaw (Prentice-Hall, 1997). Also refer to the manuals that download with the product: *NetRexx Language Reference; NetRexx Programming Guide; The NetRexx Language: Specification;* and the *NetRexx Language Supplement*.

NetRexx Special Names

Special Name	Function	
ask	Reads a line from the default input stream and returns it as a string of type <i>Rexx</i> (also called a <i>NetRexx string</i>)	
digits	Returns the current setting of numeric digits as a NetRexx string	
form	Returns the current setting of numeric form as a NetRexx string	
length	Returns an array's length (the number of elements)	
null	Returns the null value (used in assignments and comparisons)	
source	Returns a NetRexx string that identifies the source of the current class	
super	Used to invoke a method or property overridden in the current class	
this	Returns a reference to the current object	
trace	Returns the current setting as a NetRexx string	
version	Returns the NetRexx language version as a NetRexx string	

Special Methods

Special Method	Use
super	Constructor of the superclass
this	Constructor of the current class

Instruction Syntax

This section lists the NetRexx instructions. Each consists of a coding template with allowable operands. Optionally coded operands are surrounded by brackets ([]). Operands in italicized boldface are to be replaced by an appropriate term or list. This is intended as a quick programmer's reference. For greater detail, please see the NetRexx documentation cited in the introduction to this appendix.

CLASS

visibility is either private or public.

modifier is either abstract, final, or interface.

DO

```
do [ label name ] [ protect term ] ;
    instruction_list
    [ catch [vare = ] exception ; instruction_list ] . . .
    [ finally [;] instruction_list ]
end [ name ] ;
```

EXIT

```
exit [ expression ] ;
```

IF

```
if expression [;]
  then [;] instruction
  [ else [;] instruction ]
```

IMPORT

```
import name ;
```

ITERATE

```
iterate [ name ] ;
```

LEAVE

```
leave [ name ] ;
```

LO_{OP}

```
loop [ label name ] [ protect termp ] [ repetitor ] [ conditional ] ;
    instruction_list
    [ catch [vare = ] exception ; instruction_list ] . . .
    [ finally [;] instruction_list ]
    end [ name ] ;

repetitor is one of:

varc = expression_t [ to expression_t ] [ by expression_b ] [ for expression_f ]

varo over termo

for expression_r

forever

conditional is either: while expression_w or until expression_u
```

METHOD

argument_list is a list of one or more assignments separated by commas

visibility is one of: inheritable, private, or public

modifier is one of: abstract, constant, final, native, or static

signal_list is a list of one or more terms, separated by commas

NOP

```
nop ;
```

NUMERIC

```
numeric digits [expression_d];
or
   numeric form [form_setting];
form_setting is either scientific or engineering.
```

OPTIONS

```
options options_list ;
```

PACKAGE

```
package name
```

PARSE

```
parse term template ;
```

template consists of non-numeric symbols separated by blanks or patterns.

PROPERTIES

```
properties [ visibility ] [ modifier ] ;
visibility is one of: inheritable, private, or public.
modifier is one of: constant, static, or volatile.
```

RETURN

```
return [ expression ] ;
```

SAY

```
say [ expression ] ;
```

SELECT

```
select [ label name ] [ protect termp ] ;
    when expression [;] then [;] instruction . . .
    [ otherwise [;] instruction_list ]
    [ catch [vare = ] exception ; instruction_list ] . . .
    [ finally [;] instruction_list ]
end [ name ] ;
```

SIGNAL

```
signal term;
```

TRACE

```
trace trace_term ;
```

trace_term is one of: all, methods, off, or results.

Retrieving System Information

Table L-1 parse source system Strings

This table lists some example *system information strings* returned by the instructions:

```
parse source system .
say 'The system string is:' system
```

Since this information is system-dependent and subject to change, readers should retrieve this information for their own environments. You can use the sample script on the next page.

Interpreter	Platform	System Information String
Regina Rexx	Windows	WIN64 or WIN32
Regina Rexx	Linux	UNIX
BRexx	Linux	UNIX
Rexx/imc	Unix	UNIX
Rexx/imc	Linux	UNIX
ooRexx (Open Object Rexx)	Linux	LINUX
ooRexx (Open Object Rexx)	Windows	WindowsNT
Reginald	Windows	WIN64 or WIN32
r4	Windows	WIN64 or WIN32
roo!	Windows	WIN64 or WIN32
IBM REXX	z/OS TSO/E	TSO
IBM REXX	z/VM CMS	CMS
IBM REXX	VSE/n	VSE

Table L-2 Default Environment Strings

This table lists the *default command environments* for the Rexx interpreters and platforms listed. Since this information is system-dependent and subject to change, verify the default command environment for your platform by running this Rexx statement:

```
say 'The default command environment is:' address()
```

Interpreter	Platform	Default Environment String
Regina Rexx	All platforms	SYSTEM
BRexx	Windows and Linux	SYSTEM
Rexx/imc	Unix	UNIX
Rexx/imc	Linux	UNIX
ooRexx (Open Object Rexx)	Windows	CMD
ooRexx (Open Object Rexx)	Linux	sh
Reginald	Windows	SYSTEM
r4	Windows	system
roo!	Windows	system
IBM REXX	z/OS TSO/E	TSO
IBM REXX	z/VM CMS	CMS
IBM REXX	VSE/n	VSE
IBM REXX	z/OS CICS	REXXCICS

Here's a script you can run called rexx_info.rexx that executes the above statements and displays their outputs:

Here's example output from this script:

```
REXX_INFO executed on: 1 Jul 2024 at: 09:16:19

PARSE VERSION output is: REXX-Regina_3.9.6 5.00 29 Apr 2024

PARSE SOURCE interpreter output is --

The system is: UNIX

The script was invoked by: COMMAND

The script file name is: /home/babs/Desktop/rexx_tests/rexx_info.rexx

The default command environment is: SYSTEM
```



- **1.** Rexx is a *higher-level language* in that each line of code accomplishes more than does code written in traditional languages like C++, Java, or Pascal. Rexx derives its power from the fact it is a *glue language* a language that ties together existing components such as other programs, routines, filters, objects, and the like. The industry-wide trend towards scripting languages is based on the higher productivity these languages yield.
- **2.** Rexx is a *free-format language*. There are no requirements to code in particular columns or lines or in uppercase, lowercase, or mixed case.
- **3.** Expert programmers sometimes mistakenly think that they don't need an easy-to-use language. Nothing could be farther from the truth. Expert programmers become wildly productive with easy-to-use languages. Their code lasts longer as well, because less skilled individuals can easily enhance and maintain it.
- **4.** The two free object-oriented Rexx interpreters are roo! from Kilowatt Software and Open Object Rexx from the Rexx Language Association (formerly known as IBM's Object REXX). Both run standard or classic Rexx scripts without any alterations.
- One outstanding feature of Rexx is that it runs on all sizes of computer, from cell phones and handhelds running Android, to personal computers, to midrange machines and departmental servers, to mainframes.
- **6.** One of the two current Rexx standards was established by the book *The Rexx Language*, second edition, by Michael Cowlishaw, published in 1990. The other was promulgated by the American National Standards Institute, or ANSI, in 1996. There is little difference between these two standards. Chapter 13 lists the exact differences between these two similar standards.

Appendix M

7. Rexx bridges the traditional gap between ease of use and power through: simple syntax; free formatting; consistent, reliable behavior; a small instruction set surrounded by a large set of functions; few language rules; support for modularity and structured programming; and standardization.

Chapter 2

- **1.** Comments are encoded between the starting identifier /* and the ending identifier */. They may span as many lines as you like. They may also appear as *trailing comments*, comments written on the same lines as Rexx code.
- 2. Rexx recognizes functions as keywords immediately followed by a left parenthesis: function _name() or function_name(parameter). The call instruction can also be used to invoke functions. In this case, the function is encoded just like a call to a subroutine, and parentheses do not immediately follow the function name. Chapter 8 fully discusses how to invoke functions and subroutines.
- **3.** Variables do not have to be predefined or declared in Rexx. They are automatically defined the first time they are used or referred to. If a variable is equal to its name in uppercase, it is uninitialized.
- **4.** The basic instruction for screen output is say. The basic instruction for keyboard input is pull. Rexx also offers more sophisticated ways to perform input and output, described in subsequent chapters.
- **5.** *Comparisons* determine if two values are equal (such as character strings or numbers). *Strict comparisons* only apply to character strings. They determine if two strings are identical (including any preceding and/or trailing blanks). The strings are not altered in any way prior to a strict comparison. For example, the shorter string is not blank-padded as in regular or "nonstrict" character string comparison.
- **6.** Define a numeric variable in the same way you define any other Rexx variable. The only difference is that a numeric variable contains a value recognized as a number (such as a string of digits, optionally preceded by a plus or minus sign and optionally containing a decimal place, or in exponential notation).

- Structured programming is recommended because it leads to more understandable code, and therefore higher productivity. The first table in the chapter lists the structured programming constructs and the Rexx instructions that implement them. Subroutines and functions support modularity, the key structured programming concept of breaking code up into discrete, smaller routines.
- **2.** Rexx matches an unmatched else with the nearest unmatched if.
- 3. Test for the end of input by testing for the user's entry of a null string or by inspecting input for some special character string denoting the end of file in the input (such as end or exit or x). Chapter 5 introduces functions that can test for the end of an input file, such as chars and lines.

- **4.** Built-in functions are provided as part of the Rexx language. The code of internal routines resides in the same file as that of the calling routine; external routines reside in separate files. A Rexx function always returns a single value; a subroutine may optionally return a value. Chapter 8 gives full details on how to pass information into and out of functions and subroutines.
- **5.** TRUE tests to 1. FALSE tests to 0. Standard Rexx does not accept "any nonzero value" for TRUE. (However, some specific Rexx interpreters will accept any nonzero value as TRUE).
- **6.** The danger of a do forever loop is that it will be an *endless loop* and never terminate. Avoid coding the do forever loop; use structured programming's do-while loop instead. If you do code a do forever loop, be sure to code a manual exit of some sort. For example, the leave, signal, and exit instructions can end the otherwise endless loop.
- **7.** The signal instruction either causes an unconditional branch of control, or aids in processing special errors or *conditions*. signal differs from the GOTO of other languages in that it terminates all active control structures in which it is encoded.
- **8.** do while tests the condition at the top of the loop, while do until is a bottom-driven loop (it tests the condition at the bottom of the loop). Only the do while is structured. Its use is preferred. Any do until can be recoded as do while.

- **1.** Any number of subscripts can be applied to array elements. An array may have any desired dimensionality. The only limit is typically that imposed by memory. Array elements do not have to been referenced by numbers; they may be referenced by arbitrary character strings also. This is known as an *associative array*.
- 2. All elements in an array can be initialized to some value by a single assignment statement, but other operations cannot be applied to an entire array. For example, it is not possible to add some value to all numeric elements in an array in a single statement. Use a simple loop to accomplish this. A few Rexx interpreters do allow additional or extended array operations. The chapters on specific interpreters in Section II of this book cover this.
- **3.** Rexx does not automatically keep track of the number of elements in an array. To process all elements in an array, keep track of the number of elements in the array. Then process all array elements by a loop using the number of array elements as the loop control variable. Alternatively, initialize the entire array to some unused value (such as the null string or 0), prior to filling it with data elements. Then process the array elements using a loop until you encounter the default value. These two array processing techniques assume you use a numeric array subscript, and that contiguous array positions are all used. To process all elements in an array subscripted by character strings, one technique is to store the index strings in a list, then process that list against the array, one item at a time.
- **4.** Arrays form the basis of many data structures including lists, key-value pairs, and balanced and unbalanced trees. Create a list with a one-dimensional array (an array in which elements are referenced by a single subscript). Create key-value pairs by matching subscripts with their corresponding values. Create tree structures by implementing an element hierarchy through the array.

- 1. The two types of input/output are *line-oriented* and *character-oriented*. Use the former to read and write lines of information, and the latter to read and write individual characters. Line-oriented I/O is typically more portable across operating systems. Character-oriented is useful in reading all bytes in the input stream, regardless of any special meaning they might have to the operating system.
- 2. The stream function is used either to return information about a character stream or file, or to perform some action upon it. The stream function definition allows Rexx interpreters to offer many implementation-dependent file commands, and most do. Look the function up in your product documentation to learn what it offers for I/O and file manipulation. The statuses it returns are ERROR, NOTREADY, READY, and UNKNOWN.
- 3. Encode the I/O functions immediately followed by parentheses for example, feedback = linein(filein) or through a call instruction (for example, call linein filein). Capture the return code as shown in the example for the first method, or through the result special variable for the call method. It is important to check the return code for I/O operations because this informs your program about the result of that I/O and whether or not it succeeded.
- **4.** Rexx does not require explicitly closing a file after using it. Program end automatically closes any open files. This is convenient for short scripts, but for longer or more complex scripts, explicitly closing files is a good programming practice. This prevents running out of memory (because each open file uses memory) and may also be necessary if a program needs to "reprocess" a file. The typical way to close a file is either to encode a lineout or charout function that writes no data, or to encode the stream function with a command parameter that closes the file.
- **5.** Rexx offers several options beyond standard I/O for sophisticated I/O needs. One option is to use a database package, such as one of those described in Chapter 15. Another option is to use Rexx interpreter I/O extensions (discussed in Chapters 20 through 30 on the specific Rexx interpreters).

- **1.** String processing is the ability to process text. It is critically important because so many programming problems require this capability. Examples include report writing and the building and issuing of operating system commands.
- **2.** Concatenation can be performed implicitly, by encoding variables with a single space between them; by abuttal, which means coding variables together without an intervening blank; or explicitly, by using the string concatenation operator: ||.
- **3.** The three methods of template parsing are: by *words*, in which case each word is identified; by *pattern*, which scans for a specified character or pattern; and by *numeric pattern*, which processes by column position.
- **4.** The functions to use are: verify, datatype, pos, delstr, right and left, and strip. Given the flexibility of the string functions, you might choose other string functions and combine them in various ways to achieve these same operations.
- **5.** wordindex returns the character position of the nth word in a string, while wordpos returns the word position of the first word of a phrase within a string.

- **6.** Hex characters each represent strings of four bits; character strings are composed of consecutive individual characters of variable length, where each character is internally made up of 8 bits; bit strings consist solely of 0s and 1s. Rexx includes a full set of *conversion functions*, including: b2x, c2d, c2x, d2c, d2x, x2b, x2c, and x2d.
- **7.** Bit strings can be used for a wide variety of tasks. Examples mentioned in the chapter include bit map indexes, character folding, and key folding.

Chapter 7

- 1. numeric digits determines how many significant digits are in a number. This affects accuracy in computation and output display. numeric fuzz determines the number of significant digits used in comparisons. You might set fuzz in order to affect just a single comparison, while keeping the numeric precision of a number unchanged.
- **2.** Scientific notation has one digit to the left of the decimal place, followed by fractional and exponential components. Engineering notation expresses the integer component by a number between 1 and 999. Rexx uses scientific notation by default. Change this by the numeric form instruction.
- **3.** There are several ways to right-justify a number; one of them is the format function.
- **4.** The datatype function allows you to check many data conditions, including whether a value is alphanumeric, a bit string, all lower- or uppercase, mixed case, a valid number or symbol, a whole number, or a hexadecimal number.

```
-22 valid
' -22 ' valid- the blanks are ignored
2.2. invalid- has a trailing period
2.2.2 invalid- more than one decimal point
222b2 invalid- contains an internal character
2.34e+13 valid
123.E -2 invalid- no blanks allowed in exponential portion
123.2 E + 7 invalid- no blanks allowed in exponential portion
```

- **1.** Modularity is important because it underlies *structured programming*. Modularity reduces errors and enhances program maintenance. Rexx supports modularity through its full set of structured control constructs, plus internal and external subroutines and functions.
- 2. A function always returns a single string through the return instruction. A subroutine may or may not return a value. Functions return their single value such that it is placed right into the statement where the function is coded, effectively replacing the function call. Get the value returned by a subroutine through the result special variable. Functions can be coded as embedded within a statement or invoked through the call instruction. Subroutines can only be invoked via the call instruction.
- **3.** Internal subroutines reside in the same file as the main routine or driver. External subroutines reside in separate files. procedure can be used to selectively protect or expose variables for an internal routine. External routines always have an implicit procedure so that all the caller's variables are hidden.

Appendix M

- **4.** The *function search order* determines where Rexx searches for called functions. It is: internal function, built-in function, external function. If you code a function with the same name as a Rexx built-in function, Rexx uses your function. Override this behavior by coding the function name as uppercase within quotes.
- **5.** Information can be passed from a caller to a routine by several methods, including: passing arguments as input parameters, procedure expose, and using global variables. Updated variables can be passed back to the calling routine by the return instruction, changing expose'd variables, and changing global variables.
- **6.** A procedure instruction without an expose keyword hides all the caller's variables. procedure expose allows updating the variables, whereas those read in through arg are read-only.
- **7.** In standard Rexx condition testing, expressions must resolve to either 1 or 0, otherwise an error occurs. Some Rexx interpreters are extended to accept any nonzero value as TRUE.

Chapter 9

- 1. The default setting for the trace facility is trace n (or Normal). trace r is recommended for general-purpose debugging. It traces clauses before they execute and the final results of expression evaluation. It also shows when values change by pull, arg, and parse instructions. trace 1 lists all labels program execution passes through and shows which internal routines are entered and run. trace i shows intermediate results.
- **2.** The trace facility is the basic tool you would use to figure out any problems that occur while issuing operating system commands from within a script. The trace flags C, E, and F would be useful for tracing OS commands.
- **3.** To start interactive tracing, code the trace instruction with a question mark (?) preceding its argument. The ? is a toggle switch. If tracing is off, it turns it on; if tracing is on, it turns it off. The first trace instruction or function you execute with ? encoded turns tracing on. The next one that executes with the question mark will turn it off.
- **4.** When in *interactive mode*, the Rexx interpreter pauses after each statement or clause. Use it to single-step through code.

- The purpose of error or exception trapping is to manage certain kinds of commonly occurring errors in a systematic manner. The conditions are ERROR, FAILURE, HALT, NOVALUE, NOTREADY, SYNTAX and LOSTDIGITS. The ANSI-1996 standard added LOSTDIGITS.
- **2.** To handle a control interrupt, enable an error trap for the HALT condition. Enable this exception condition, then Rexx automatically invokes your error routine when this condition occurs.
- **3.** signal applies to all seven error conditions. call does *not* apply to SYNTAX, NOVALUE, and LOSTDIGITS errors. signal forces an *abnormal change* in the flow of control. It terminates any do, if or select instruction in force and unconditionally transfers control to a specified label.

call provides for normal invocation of an internal subroutine to handle an error condition. The result special variable is not set when returning from a called condition trap; any value coded on the return instruction is ignored.

- **4.** Use the interpret instruction to dynamically evaluate and execute an expression.
- **5.** Enable a condition routine through a signal or call instruction. You can have multiple routines to handle a condition by coding signal or call multiple times, but only one condition routine is active for each kind of error trap at any one time.
- **6.** If the error trap was initiated by the signal instruction, after executing the condition trap routine, you must reactivate the error condition by executing the signal instruction again.
- **7.** Whether it is better to write one generic error routine to handle all kinds or errors, or to write a separate routine for each different kind of error, depends on what you're trying to do and the nature of your program. Both approaches have advantages. Sometimes it is convenient to consolidate all error handling into a single routine, other times, it may be preferable to have detailed, separate routines for each condition.

Chapter 11

- **1.** All Rexx implementations covered in this book have a stack; however, how the stack is implemented varies. Review the product documentation if you need to know how the stack is supported within your version of Rexx.
- **2.** Stacks are last-in, first-out structures, while queues are first-in, first-out. Instructions like push and queue place data into the stack, and instructions like pull and parse pull extract data from it. The queued built-in function reports how many items are in the stack.
- **3.** The limit on the number of items the stack can hold is usually a function of available memory.
- **4.** The answer to this question depends on the Rexx interpreter(s) you use and the platforms to which you wish to port. Check the documentation for the platforms and interpreters for which you intend to port.
- **5.** Some Rexx interpreters support more than one stack, and more than one memory area or buffer within each stack. Functions or commands like newstack and delstack manage stacks, while makebuf, dropbuf, and desbuf manage buffers. Check the documentation for your specific Rexx interpreter regarding these features, as they do vary by interpreter.

- Consistency in coding is a virtue because it renders code easier to understand, enhance, and maintain.
- 2. Some programmers deeply nest functions because this makes for more compact code. Some developers find it an intellectually interesting way to code, and others even use it to demonstrate their cleverness. If overdone, it makes code indecipherable and result in slower execution of the program.

Appendix M

- A good comment imparts information beyond what the code shows. It explains the code further, in clear English. Rexx comments may appear on the end of a line, in stand-alone lines, or in comment boxes.
- **4.** Modularity and structured programming permit a limited number of entry and exit points from discrete blocks of code. This makes code easier to understand and follow, and restricts interactions between different parts of programs. The result is higher productivity, and more easily understood code that is easier to maintain.
- **5.** do until and signal are unstructured control instructions. Any code using them can be rewritten as structured code by use of the do while and if statements.
- **6.** A good variable name is descriptive. It is not short or cryptic but long and self-explanatory. It does not employ cryptic abbreviations but instead fully spells out words. Good variable naming makes a program much more readable.
- Global variables can be highly convenient when coding. But best programming practice limits their use in larger and more complex programs. Structured programming involves carefully defined interfaces between routines, functions, and modules. Variables should be localized to routines and their use across routines should be carefully defined and limited. Global variables do not follow these principles. Different programmers and sites may have their own standards or opinions on this matter.

Chapter 13

- 1. No. Writing portable code typically takes more effort than writing nonportable code. In some cases, where the goal is quick coding, a nonportable solution may meet the goal more effectively.
- **2.** Scripts can learn about their environment in several ways. Key instructions for this purpose include parse version and parse source. The chapter also lists many other instructions and functions that help scripts learn about their environment.
- **3.** arg automatically translates input to uppercase, while parse arg does not.
- **4.** The sourceline function either returns the number of lines in the source script, or a specific line if a line number is supplied as an argument
- **5.** The appendix of the TRL-2 book lists all its differences from TRL-1.

- 1. Rexx sends a command string to the environment when it does not recognize it as valid Rexx code. The default environment, the environment to which external commands are directed by default, is typically the operating system's shell or command interface.
- 2. Enclose commands in quotation marks when their contents will otherwise be incorrectly interpreted or evaluated by the Rexx interpreter. For example: dir > output.txt will not work because the > symbol will be interpreted as a "greater than" symbol by Rexx, rather than as a valid part of the OS command. So, this OS command would fail unless enclosed within quotation marks. Some developers like to enclose *all* of the OS command string in quotes, except the parts they specifically want Rexx to evaluate. Others quote only those parts of the

command that must not be evaluated. We generally follow the latter approach in this book. Either technique works fine; it is a matter of preference as to which you use.

To prepare a command in advance, assign the command string to a Rexx variable prior to issuing it to the operating system. You can easily inspect the variable's contents merely by displaying it.

- **3.** Basic ways to get error information from OS commands include inspecting their command return codes, capturing their textual error output, and intercepting raised condition traps within error routines. Look up return code information for OS commands in the operating system documentation.
- **4.** Two ways to redirect command input/output from within a script are the address instruction or through the operating system's redirection symbols. Command I/O redirection works on operating systems in the Windows, Linux, Unix, BSD, and DOS families, among others. Not all operating systems support I/O redirection.
- **5.** Sources and targets can be specified as arrays or streams (files). They may be intermixed within the same address command.
- **6.** To direct all subsequent external commands to the same interface, specify address with a system target only (without any external command encoded on the same instruction). Repeated coding of address without any environment operand effectively "toggles" the target for commands back and forth between two target environments.

- **1.** Rexx/SQL is free, open source, universal, and standardized. Database programming provides sophisticated I/O for multiuser environments. Advantages to database management systems include backup/recovery, database utilities, central data administration, transaction control, and many other features.
- Scripts typically start by loading the Rexx/SQL function library for use through the RxFuncAdd and SQLLoadFuncs functions.
- **3.** Connect to a database by SQLConnect, and disconnect through the SQLDisconnect function. Check connection status by SQLGetInfo. You can also check the return code for any Rexx/SQL function to verify its success or failure.
- **4.** Consolidating error handling in a single routine is typical in database programming. It allows consistent error handling, while minimizing code. Here are the SQLCA variables set by Rexx/SQL:

SQLCA.SQLCODE — SQL return code
SQLCA.SQLERRM $-$ SQL error message text
SQLCA.SQLSTATE $-$ Detailed status string (N/A on some ports)
SQLCA.SQLTEXT $-$ Text of the last SQL statement
SQLCA.ROWCOUNT $-$ Number of rows affected by the SQL operation
${ t SQLCA.FUNCTION }-{ t The last Rexx external function called}$
SQLCA.INTCODE — The Rexx/SQL interface error number
SOLCA INTERPR - Text of the Revy/SOL interface error

Appendix M

- **5.** Assigning a SQL statement to a Rexx variable makes its coding clearer. It can also be verified simplifying by displaying the variable's value via a simple say instruction.
- **6.** SQLDisconnect terminates a connection with a database and closes any open database cursor(s) for that connection. SQLDispose releases the work area (memory) resources originally allocated by a SQLPrepare function.
- **7.** Rexx/SQL is a database-neutral product that is free, open source, very capable, and widely used. It offers both generic and native database interfaces to nearly any available database. Database-specific Rexx interfaces are also available from a few relational database companies. These products are proprietary and support only that company's database. In exchange, they often offer access to database-unique features, for example, the ability to write Rexx scripts for database administration or for controlling database utilities. An example of a proprietary interface is IBM Corporation's DB2 UDB interface described in this chapter.

Chapter 16

- **1.** Both Rexx/Tk and Rexx/DW are free, open source interfaces that allow you to create portable graphical user interfaces for Rexx scripts. Rexx/Tk is based on the widely used Tk toolkit and provides Rexx programmers entree into the Tcl/Tk universe. Rexx/DW is a lightweight protocol; it does not have the overhead that Rexx/Tk does. Both products offer very large libraries of GUI functions and features.
- **2.** Rexx Dialog was designed specifically for scripting Windows GUIs. It works with both the Reginald and Regina Rexx interpreters.
- **3.** A widget is a control or object placed on a window with which users interact. Widgets are added in Rexx/Tk by functions like TkAdd and TkConfig and others. Widgets are packed onto DW window layouts.
- **4.** The basic logic of GUI scripts is the same, regardless of whether Rexx/Tk or Rexx/DW is used. Register and load the function library; create the controls or widgets for the topmost window; display the top-level window; wait for user interaction with the widgets, handle the interactions requested through event-handling routines; and terminate the window and the program when requested by the user.
- **5.** Tcl/Tk GUI toolkit has achieved worldwide use because it renders inherently complex windows programming relatively simple. It is also portable and runs on almost any platform.
- **6.** Rexx/gd creates graphical images, not GUIs. These images can be used as part of a GUI (for example, as components placed on a Web page). Rexx/gd creates its images in memory work areas. The images are typically stored on disk after developed, then the script releases the image memory area and terminates.

Chapter 17

1. Yes, you could write Web programs without using any of the packages described in the chapter. However, you would be doing a lot more work, and essentially duplicating code and routines that already exist and that you can freely use.

- **2.** Functions htmltop and htmlbot write standard headers and footers, respectively. Scripts write the *Content Type header* by the PrintHeader function. The content type header must be the first statement written to the browser. It tells the browser the kind of data it will receive in subsequent statements. Read user input through the ReadForm function, among others.
- **3.** Function CgiInit initializes and sets up the CGI header, while CgiEnd typically ends a script. CgiHref generates a hyperlink.
- **4.** Mod_Rexx makes the Apache open source Web server completely programmable by Rexx scripts. Apache scales better than traditional CGI Web server programming because Apache handles incoming connections much more efficiently. Mod_Rexx gives the same capabilities to Rexx scripts as Perl programs get from mod_perl and PHP scripts from mod_php.
- **5.** Rexx Server Pages are analogous to Java Server Pages or embedded PHP scripting, in that RSPs permit embedding Rexx code directly into the HTML of Web pages. This permits "dynamic pages" that are tailored or customized in real time.
- **6.** Short- and long-form delimiters identify and surround Rexx code within HTML pages. They are used with Rexx Server Pages, or RSPs. There is no functional difference between short- and long-form delimiters.
- **7.** To customize Apache's log processing, use the Mod_Rexx package. It enables you to code Rexx scripts that control any of the 14 or so processing steps of the Apache Web server, including the one that manages log processing.

Chapter 18

- XML is a self-describing data language. XML files contain both data and tags that describe the data. They are textual files. XML is useful for data interchange between applications or companies. XPath is a standard for identifying and extracting parts of XML files. XSLT applies definitional templates called stylesheets to XML files. It can be used to transform XML files. HTML is a language that defines Web pages.
- **2.** Function xmlParseXML can be used to load and optionally validate a document. Function xmlSaveDoc saves a document, while function xmlFreeDoc frees resources.
- **3.** Function xmlParseHTML can parse or scan a Web page written in HTML. xmlFindNode and xmlNodesetCount may also be useful, as per the example in the chapter.
- **4.** Rexx does not include regular expressions. However, many packages are freely available that add this facility to the language, including *RexxRE* and *Regular Expressions*. Appendix H lists many of the free and open source packages, tools, and interfaces for Rexx programmers.
- **5.** Apply an XSLT stylesheet to a document by the xmlApplyStylesheet function. xmlParseXSLT parses and compiles an XSLT stylesheet, while xmlFreeStylesheet frees a compiled stylesheet. xmlOutputMethod reports the output method of a stylesheet.

Chapter 19

BRexx runs fast on limited resource computers. Regina and BRexx run under virtually any imaginable platform. Rexx interpreters that are extended specifically for Windows include Regina, r4, and Reginald. Several interpreters offer extensions for Unix, Linux, and BSD, especially Rexx/imc, BRexx, and Regina.

Appendix M

- 2. The major Rexx standards are TRL-1, TRL-2, ANSI-1996, and SAA. Most Rexx interpreters adhere to TRL-2, while Regina is the primary offering that implements full ANSI-1996. SAA was IBM's attempt to rationalize its diverse operating systems in the 1990s. SAA declared Rexx its common procedures language. The practical effect was that IBM ported Rexx to all its operating systems and established more rigorous standardization for the language across platforms.
- **3.** Open Object Rexx and roo! are fully object-oriented Rexx interpreters. Both are supersets of standard or classic Rexx. This means that you can take a standard Rexx script and run it under either Open Object Rexx or roo! without any changes to that script. roo! is free under Windows, while Open Object Rexx is free under Windows, Linux, Unix, BSD, macOS, and Android.
- **4.** NetRexx runs under the Java Virtual Machine (JVM). So, it runs anywhere Java runs. It presents an easy-to-use alternative to Java and may be freely intermixed with Java scripts. So, for example, NetRexx can make full use of the Java class libraries. You can write applications, classes, Java Beans, and servlets in NetRexx. NetRexx is a Rexx-like language; it does not meet the Rexx standards such as TRL-2 or ANSI-1996.
- **5.** Regina is the open source Rexx that it includes many of the extended functions offered in other Rexx interpreters.
- **6.** BRexx, ooRexx for Android, and Rexx for Android (or Rexxoid) all run on Android cell phones. Chapter 25 covers them in detail.
- **7.** Emulation is slower and less efficient than running in native mode. However, emulation has the immediate benefit that it ports applications without code changes.

- **1.** Regina is open source, widely popular, well supported, and meets all standards. It runs on virtually every platform, including any version of Windows, Linux, Unix, macOS, and BSD. It also runs natively under a very wide variety of lesser-used operating systems.
- 2. Use the stack to manage command I/O and pass information between routines. Regina also has a unique stack facility that permits communications between different processes on the same machine, and even between different processes on different machines. Regina also supports sending and receiving I/O to/from commands using the address instruction with standard keywords like input, output, and error.
- **3.** Use readch and writech to read and write character strings, and readln and writeln to read and write lines. Use open to explicitly open a file, close to explicitly close a file, eof to test for end of file, and seek to move the file pointers.

- **4.** The SAA API is an interface definition that allows programs written in languages like C to use Regina as a set of services or a function library. Regina uses offers SAA-compatible functions for loading external function libraries. These include rxfundadd to register an external function and rxfundrop to remove external functions from use.
- **5.** Regina supports a wide variety of parameters on the options instruction, including CMS, UNIX, BUFFERS, AREXX_BIFS, REGINA, ANSI, SAA, TRL2, and TRL1. See the Regina documentation for full details on these and other options instruction parameters.

Chapter 21

- **1.** Rexx/imc runs under all forms of Linux, Unix, and BSD. Rexx/imc meets the TRL-2 standards. Its advantages include its strong Unix heritage and orientation, extra Unix functions, good documentation, and a strong track record of support.
- **2.** Rexx/imc includes C-like I/O functions such as open, close, stream, and ftell. This I/O model provides more explicit control than Rexx's standard I/O. Use the standard I/O functions for portability and standardization, and use the C-like I/O functions for more explicit file control.
- **3.** select can key off the values in a variable in Rexx/imc, rather than requiring condition tests. This is useful in implementing a CASE construct based on the value of a variable.
- **4.** Use rxfuncadd to load and register and external function for use, and rxfuncdrop to drop an external function. Use rxfuncquery to determine if a function is already loaded.
- **5.** Rexx/imc accepts any nonzero value as TRUE, whereas standard Rexx only accepts 1 as TRUE. In this respect, any standard Rexx script will run under Rexx/imc, but a script written for Rexx/imc's approach to TRUE conditions might fail when run under standard Rexx.

- **1.** BRexx's advantages include its high performance, small footprint, wide array of built-in functions, and extra function libraries. It runs on a wide variety of platforms and in addition is uniquely positioned among Rexx interpreters to run on smaller, limited-resource environments. It also runs on mainframes or in mainframe emulation in its download called BRexx/370.
- Position a file pointer through the seek function. Using seek, you can position to anywhere in the file including its beginning or end. The seek function can also return current file pointer positions. Use it to determine the size of a file by this statement: filesize = seek (file pointer, 0, "EOF").
- **3.** The EBCDIC functions convert data between ASCII and EBCDIC (these are the two predominant coding schemes, with the former being used on PCs and midrange machines, and the latter being used for mainframes). The Date Functions external function library can handle date arithmetic.
- **4.** The stack buffer functions include makebuf (create a new system stack), desbuf (destroy all system stacks), and dropbuf (destroy the top n stacks).

- **5.** BRexx supports standard Rexx I/O, C-like I/O, and database I/O through MySQL. Standard Rexx I/O is for general use in standards-based, portable programs; C-like I/O is nonstandard but offers more explicit file control; and the MySQL functions provide the full power of a relational database. The latest releases also support SQLite, a database alternative to MySQL.
- **6.** Code operating system commands in the same manner as with any standard Rexx interpreter. You can also encode them as if they were functions, if they use standard I/O. Capture command output through the stack, or code a command as if it were a function and capture its return string through an assignment statement.

- **1.** Reginald's biggest advantage is that it is specifically tailored and customized for Windows. Furthermore, it offers many add-on tools, provides great documentation on how to use its extended features and functions, permits use of *any* Windows DLL, meets the Rexx TRL-2 standards, and supports the SAA API.
- **2.** Reginald comes with complete documentation that includes examples of every new function and feature. You shouldn't require any information other than what comes with Reginald to use it.
- **3.** Use Reginald's SAA-compliant functions like rxfuncadd, rxfuncquery, and rxfuncdrop to access external function libraries. Use funcdef to access DLLs that were not written to Rexx's specifications. You can autoload many function libraries through Reginald's Administration Tool and thereby avoid explicitly loading them in every script. This is very convenient and also reduces the amount of code you must write.
- **4.** Reginald accesses virtually any external data source, including office products like Microsoft Excel and Access, and databases like SQL Server, MySQL, and PostgreSQL. The Open Database Connectivity or ODBC drivers are the means to accomplish this.
- **5.** Reginald offers a freely downloadable tutorial on how to use Reginald with the Common Gateway Interface, or CGI. Other tutorials address subjects like mailslots, Internet access, sockets, and GUI programming.
- **6.** DriveInfo and MatchName are two functions (among others) that supply information about disk drives. MatchName also provides attribute information. A file does not have to be open to retrieve information about it, but it must exist.
- 7. Valuein reads binary values in as numeric values.
- **8.** The LoadText function reads lines of a text file into a stem variable, or saves a stem variable's lines to a text file.
- **9.** The RxDlgIDE add-on product helps generate GUI code.
- **10.** RXErr establishes how GUI-related errors will be handled; RXCreate creates a new window with its controls; RXMsg controls user interaction with a window. The key values scripts check to determine how a user interacted with a window and its controls are rxid and rxsubid.
- **11.** The Speech library allows the computer to synthesize speech. The MIDI function library controls the MIDI interface, which connects a computer to external instrumentation. Use MIDI to send information to a musical instrument, and the Speech library to read a document aloud.

- **1.** SBCs typically lack human interface devices like displays, keyboards, touchpads, mice, etc. They also usually have lesser processor and memory resources, which directly affects how you go about programming them.
- **2.** SBCs are often sold without cases because they're often embedded in other systems. They don't need to be "dressed up" like consumer laptops and desktops.
- **3.** NetRexx requires Java support because it runs on the Java Virtual Machine. ooRexx only requires Java support if you use it with the BSF4ooRexx Java integration tool. Some of the JDKs available include those from Oracle Corporation, BellSoft, and the OpenJDK.
- **4.** Apache Subversion is a software versioning and revision control system. Use it to manage software and ensure you install the proper versions.
- **5.** BSF4ooRexx provides Java integration for ooRexx. It is not needed or used with NetRexx.
- **6.** No, you don't need to learn object-oriented programming, because ooRexx is a superset of classic Rexx, and you can code strictly procedurally with it if you so choose.
- 7. You need a pin-interface software tool, like Broadcom or WritingPi. Pi4J can help manage this.

- **1.** *Scripting Layer for Android* (or SL4A) is a scripting host. It allows developers to automate Android tasks in scripting languages instead of Java. Rexx is one of several scripting languages it supports.
- 2. BRexx is the only one of the three interpreters in this chapter that requires and uses SL4A.
- **3.** The Manifest file manages permissions. Unless you have some other obvious problem, this is what you need to edit to fix a permissions problem.
- **4.** At the present time, you must root your device to install and run ooRexx for Android. That is anticipated to change soon.
- **5.** You direct commands to Android by ADDRESS SYSTEM.
- **6.** The bluetoothConnect function knows which device to contact by the identifier coded as its operand.

- **1.** Among the advantages to r4/roo! are that they are specifically tailored for Windows, they fit together as a classic Rexx/object Rexx pair, and they share a large set of Windows-specific tools. Among the tools are AuroraWare! (to create GUIs), TopHat (for creating fill-in-the-blank forms), Poof! (with 135 command-line aids and tools), Revu (to view text), XMLGenie! (to convert XML to HTML), Chill (to hide Rexx source code), and the Exe Conversion Utility (to convert scripts to stand-alone executable files).
- 2. r4 scripts run under roo! without any alteration. roo! scripts will typically not run under r4, because roo! is a superset of classic Rexx and r4. Since r4 scripts are classic Rexx, they are widely portable across operating systems. roo! scripts are portable only across varieties of Windows, because roo! is a Windows-specific product.
- **3.** Several of the r4/roo! utilities aid in building GUIs, AuroraWare! being the most directly pertinent. In the list of attributes, the r4/roo! GUI tools offer the best customization for Windows, are easiest to use, can be learned most quickly, and are easiest to maintain. Competing tools such as Rexx/Tk and Rexx/DW are the most portable and the most powerful. These statements are generalizations that may not apply across the board to all projects, so always assess the available tools versus the criteria and goals of your own project.
- **4.** Installation of r4 and roo! is simple and similar to other Windows installs. The one variant is that there is a preinstall step that Web-installs on the user's system.
- **5.** roo! supports *all* the principles of object-oriented programming, including classes and methods, inheritance, an hierarchical class structure, encapsulation, abstraction, and polymorphism. As in all object-oriented systems, messages invoke methods in the various classes.
- **6.** roo! supports a number of new operators in order to bring full object-orientation to classic Rexx. These include the following:

Operator	Symbols	Use
^^	Double Caret	Instance creation
^	Caret	Method invocation prefix operator
~	Tilde	Method invocation infix operator
[]	Brackets	Array-like reference operator
{}	Braces	Vector class reference
!	Exclamation point	Identifies a command

7. For line-oriented I/O, use classes such as InLineFile and OutLineFile. To manage the display screen, the Console class is useful. InStream and OutStream handle the default input and output streams. Use the Socket class to manage TCP/IP sockets.

- **1.** Open Object Rexx is a superset of classic Rexx. Classic Rexx programs typically run under Open Object Rexx without any alteration. ooRexx features *inheritance*, the ability to create subclasses that inherit the methods and attributes of their superclasses. *Multiple inheritance* allows a class to inherit from more than one superclass. Open Object Rexx's class hierarchy implements all this.
- **2.** Encapsulation means that only an object can manipulate its own data. Send a message to the object to invoke its methods to manipulate that data. Polymorphism means that messages invoke actions appropriate to the object to which they are sent.
- **3.** The Stream class has I/O methods. It goes beyond classic Rexx capabilities to include reading/writing entire arrays, binary, and text I/O, shared-mode files, direct I/O, and so on.
- **4.** Open Object Rexx adds new special variables. Two are used for referencing objects: Self references the object of the current executing method, while Super references the superclass or parent of the current object.
- **5.** Actually, there are more than four directives. The most frequently used ones are: ::CLASS (to define a class), ::METHOD (to define a method), ::ROUTINE (to define a callable subroutine), and ::REQUIRES (to specify access to another source script). Directives mark points within the script at which these definitions or actions apply.
- **6.** Collection classes manipulate sets of objects and define data structures. A few of the collection classes are: Array (a sequenced collection), Bag (a nonunique collection of objects), Directory (a collection indexed by unique character strings), List (a sequenced collection which allows inserts at any position), and Queue (a sequenced collection that allows inserts at the start or ending positions).
- **7.** The new USER condition trap allows user-defined error conditions. Explicitly raise an error condition (user-defined or built-in) by the new raise instruction.
- **8.** As in classic Rexx, the expose instruction permits access to and updating of specified variables. In object programming, expose permits access to objects as well as string variables.

Chapter 28

4.

- Every classic Rexx program will run under Open Object Rexx, but this does not take advantage of any of the new object-oriented capabilities of Open Object Rexx. Compatibility both preserves legacy scripts and allows you to tip-toe into object-oriented scripting at a pace at which you are comfortable.
- **2.** All instructions and functions of classic Rexx are part of Open Object Rexx. The latter adds a number of new and enhanced instructions and functions.
- **3.** Collections are classes that implement data structures and allow manipulation of the objects in the class as a group.

Her	Here are some solutions:			
	To return a string with its character positions reversed, code: string~reverse			
	To return a substring, code: string~substr(1,5)			

- **5.** The stream class offers a superset of the I/O capabilities of classic Rexx. Extra features it includes are: reading/writing entire arrays, binary and text I/O, shared-mode files, direct I/O, and so on.
- **6.** The four most used directives are: ::CLASS (to define a class), ::METHOD (to define a method), ::ROUTINE (to define a callable subroutine), and ::REQUIRES (to specify access to another source script). Classes and methods are placed after the main routine or driver (towards the end of the script).
- **7.** These symbols can be used to express at and put in many collections:

Operator	Use
[]	Same as the at method
[]=	Same as the put method

8. These monitor objects are applied against the default streams. The default streams are .stdin, .stdout, and .stderr.

- Mainframe Rexx generally meets the TRL-2 and SAA standards. There are slight differences between Rexx interpreters on the different mainframe platforms as well as between mainframe Rexx and the standards. Appendix R enumerates the exact differences between IBM mainframe REXX and the ANSI 1996 Rexx standard.
- **2.** Mainframe Rexx enhances the instructions options and parse and adds the extended mainframe instruction upper. Mainframe extended functions include externals, find, index, justify, linesize, and userid. In addition, both VM and OS Rexx add their own external functions, but what is included in this list varies between VM and OS.
- **3.** Mainframe Rexx supports the Double-Byte Character Set, which allows encoding for ideographic languages, such as Asian languages like Chinese and Korean.
- **4.** I/O on the mainframe is often performed using EXECIO.
- **5.** Immediate commands can be entered from the command line and they affect the executing script in real time. Immediate commands can turn the trace on or off, suspend or resume script execution, and suspend or resume terminal (display) output.
- **6.** VM Rexx knows about and automatically loads any or all of these three named packages if any function within them is invoked from within a script: RXUSERFN, RXLOCFN, and RXSYSFN. Users may add their own functions to these libraries.
- **7.** Rexx compilers separate the compile (or script preparation step) from its execution. This usually produces an executable that runs faster, purchased at the price of a two-step process. If a Rexx script is stable and unlikely to change, and is run frequently, compiling it might increase its run-time performance. Note that the mainframe compiler does not guarantee a performance increase.
- **8.** VM Rexx requires a comment line, while OS TSO/E Rexx requires the word REXX. To satisfy both requirements, encode this as the first line in a mainframe Rexx script: /* REXX */.

9. VM Rexx scripts reside in files of type EXEC. XEDIT editor macros reside in files of type XEDIT. CMS pipelines use files of type REXX.

- **1.** NetRexx offers some of the traditional advantages of Rexx: easy syntax, ease of use, and ease of maintenance. You can intermix NetRexx and Java classes however you like.
- **2.** The NetRexx translator can be used as a compiler or an interpreter. As an interpreter, it allows NetRexx programs to run without needing a compiler or generating .class files. As a compiler, it can compile scripts into .class files. NetRexx programs can be both compiled and interpreted in just one command. This is easy to do and machine-efficient. NetRexx can also generate formatted Java code, including original commentary, if desired.
- **3.** NetRexx scripts run on any machine that offers a Java Virtual Machine (JVM). This makes them portable across all Java environments. As an interpreter, the NetRexx translator allows NetRexx programs to run without needing a compiler or generating .class files.
- **4.** Indexed strings are NetRexx strings by which subvalues are identified by an index string. Arrays are tables of fixed size that must be defined before use. Arrays may index elements of any type, and the elements are considered ordered. To define a dictionary collection class, refer to the Java documentation. NetRexx uses all the Java classes and methods.
- **5.** NetRexx uses all the Java classes and methods, so refer to the Java documentation for information.
- **6.** *.nrx files contain the source of a NetRexx script. *.java files contain Java source code, and can be produced automatically from NetRexx scripts by the NetRexx translator. *.class files contain the binary or compiled form of a program.
- **7.** Special names perform an action wherever they appear in the source. For example, ask reads a line from the default input stream and returns it as a string of type *Rexx* while length returns an array's length (the number of elements). The special methods include super, the constructor of the superclass, and this, the constructor of the current class.
- **8.** To migrate classic Rexx scripts to NetRexx, download the free *Rexx2Nrx* classic Rexx to NetRexx automated conversion tool.



How to Use EXECIO

by Howard Fosdick and Lionel B. Dyck

Overview

Chapter 5 covered how to perform input and output operations in Rexx scripts. The I/O model is often called *streaming*, because Rexx considers both input sources and output targets as sequences of characters or bytes.

One of the benefits of the streaming model is that it applies regardless of whether you're working with disk files, printers, or displays. It readily lends itself to *I/O redirection* -- the ability to alter a program's input/output stream without altering the program code itself.

Rexx requires fewer than a dozen instructions and functions to effectively manage I/O streams. They include parse, chars, charin, charout, lines, linein, lineout, and stream.

These support:

Character-oriented I/O a stream of individual bytes
Line-oriented I/O reading and writing lines (or records)
Conversational I/O interaction with users at their displays
Redirected I/O switching I/O sources and targets without altering Rexx programs

IBM Rexx for the VM operating system natively supports streaming. OS systems require installation of the *Stream I/O for TSO/E Rexx Function Package* for streaming support.

A big advantage to I/O streaming is that it conforms to the Rexx standards. It thus provides portability of both program code and programmer skills across platforms (except for OS systems lacking the Streaming Function Package).

An alternative I/O facility that has long been available on mainframes is the <code>EXECIO</code> command. EXECIO stands for "Execute I/O".

EXECIO is a highly popular alternative to streaming I/O on mainframes. If you work there, you'll either use it or run across it. EXECIO is available on all mainframes -- on the operating systems we generically refer to as the OS, VM, and VSE families -- but no other platforms.

The advantages to EXECIO are that it is:

	Available across all mainframes
	Flexible and powerful, yet simple to code
	Allows processing of multiple records or even an entire dataset with a single command
П	Works with the data stack

This chapter introduces EXECIO and explains how to code it.

Why EXECIO?

Use EXECIO to perform these tasks:

Open and close files
Read or write a record to or from a file
Read or write a specified number of records in one operation to or from a file
Read or write an entire file using a compound or stem variable an array in a single operation
Update records in a file
Append records to a file

EXECIO can only operate on sequential datasets, or members of partitioned datasets. It supports all the standard record formats: fixed or variable length, blocked or unblocked.

Allocating Files

Since Chapter 29 on mainframe Rexx concentrated on VM program examples, this chapter will focus on TSO/E. The mechanics and coding of the EXECIO command are very similar on these systems (but not exactly the same).

In most programs, before your script processes a file, you have to allocate that file for use. Use the TSO ALLOCATE command for this. (You'll often see it abbreviated as ALLOC, FILE as F, and DATASET as DA.)

Here are a few example templates for ALLOCATE commands:

```
    (1) "ALLOC F(ddname) DA(dataset) LIKE(dataset)"
    (2) "ALLOC F(ddname) DA(dataset) NEW DIR(size) SPACE(size, size) DSORG(org) RECFM(format) LRECL(size) BLKSIZE(size)"
    (3) "ALLOC F(ddname) DA(dataset) SHR REUSE"
```

Example (1) allocates a new dataset with the same file parameters as the LIKE dataset it names. The new dataset inherits its characteristics from the existing file.

Example (2) allocates a new file for use with the specified characteristics. These dataset definition parameters directly correspond to the equivalents you would code in Job Control Language (JCL).

Example (3) allocates an existing dataset as shareable (SHR).

In all cases, the ddname name on the ALLOCATE statement corresponds to the DD statement you would code if you were coding JCL. The dataset name is the same as you would code in your DSN= parameter in JCL.

Of course, when your Rexx program concludes, you need to de-allocate any files it uses. Use the FREE statement for this. Here are example templates:

```
(1) "FREE F (ddname) "
(2) "FREE ALL"
```

Example (2) conveniently frees all datasets allocated to your Rexx program in a single statement.

EXECIO Basics

Now let's explore the EXECIO statement.

Here are a couple easy examples to start:

```
(1) "EXECIO 0 DISKR ddname (OPEN "
(2) "EXECIO 0 DISKR ddname (FINIS "
```

Example (1) opens a dataset for processing, while example (2) closes the dataset after you're done processing it.

The 0 that occurs right after the keyword EXECIO tells how many lines (or records) you want to process. When it is 0, that means you're processing zero records. You're either just opening or closing the file.

OPEN means you're opening the file for use. FINIS means you're closing the file after your use of it is complete. These keywords appear in parentheses after the other operands.

Note that it is acceptable (and very common) not to code the matching right parenthesis. The code shown above with a single left parenthesis is perfectly fine.

DISKR indicates you're reading a file. The two alternatives are DISKW for writing to a file, and DISKRU to indicate a read operation for update.

The ddname **must** match that given in a previous ALLOCATE statement. This is how TSO matches up your EXECIO statement to the file it should operate upon. So that ddname would match the one in an ALLOCATE statement, like this one, for example:

```
"ALLOC F(ddname) DA(dataset) SHR"
```

Reading Data

EXECIO reads data from a file into one of these places:

The data stack
A stem variable (also called a compound variable or an array)
A variable or list of variables (VM only, not available in OS)

If you don't specify a variable name, EXECIO's default is to read data into the stack for subsequent processing by your program. So you would normally follow your EXECIO read statement with Rexx code that then processes the data in the stack.

When you do specify a variable on the EXECIO statement, you can supply the stem name of a compound symbol. In other words, you use Rexx's notation to specify an array (a table) into which to read the file data. Once you have issued the EXECIO and have read data into this Rexx array, you can process it however you like.

Let's look at a few examples of reading data:

```
(1) "EXECIO 1 DISKR indd"
```

- (2) "EXECIO 100 DISKR indd (STEM mydata. "
- (3) "EXECIO * DISKR indd (FINIS STEM myarray. "

Example (1) reads a single record into the data stack. Coding 1 tells EXECIO to read one record. The lack of a variable name in the statement means that, by default, the data will be read into the stack.

As always, the ddname -- here indd -- links the EXECIO to the proper ALLOCATE ifstatement and tells it which file to process.

Example (2) reads 100 records from the file into the stem variable mydata. In other words, this populates 100 consecutive slots in the array called mydata. with 100 records from the file.

The keyword STEM must be immediately followed by a stem variable into which to read the records. **Note that** it is very important to include the period as the last character in the input variable name:

```
mydata. not mydata
```

This is how you indicate that your variable is the stem of a compound variable, rather than just a simple variable and not an array. (Review Chapter 4 if you need a refresher on how Rexx uses compound variables and their stems to represent arrays.)

Example (3) codes an asterisk instead of a specific number of lines to read. The result is that EXECIO reads **all** the records from the file into the compound variable (or table) named myarray. So, an asterisk means to read (or write) an entire dataset.

The ${\tt FINIS}$ keyword automatically closes the file following the read operation.

Whenever you do an "array read" into a compound variable, EXECIO will place the number of lines read into the 0^{th} array position. In these examples, that's into the variables named mydata.0 and myarray.0. This is very useful information for your program's subsequent array processing.

The Role of Quotation Marks

Remember that in Rexx, if you enclose a statement within quotation marks, it will be sent to the default environment for processing. (On OS systems, that default environment will be TSO/E.)

For example, in these statements, EXECIO reads a single line from a file into the data stack:

```
"ALLOC FI(ddname) DA('my.input.dataset') SHR REUSE"
"EXECIO 1 DISKR ddname"
```

In some cases you may want to have the ddname dynamically substituted into the EXECIO statement from a Rexx variable. This gives your code more flexibility.

In this case, be careful with your quotation marks.

The ddname will **only** be substituted in correctly if it exists **outside** of quotation marks. Here's an example. You can see how ddname is a Rexx variable whose value will be substituted into the EXECIO statement before it is passed to TSO for processing:

```
ddname = "my.input.ddname"
"EXECIO * DISKR" ddname "(FINIS STEM myarray."
```

More Examples

Let's round out this discussion with a few more example EXECIO statements:

```
(1) "EXECIO * DISKW outdd (FINIS STEM mydata."
(2) "EXECIO 20 DISKW outdd (STEM mydata."
(3) "EXECIO 9 DISKR indd (SKIP "
(4) number_in_q = QUEUED()
   "EXECIO" number_in_q "DISKW outdd (FINIS"
```

Example (1) writes all the contents of the Rexx array to the output file. DISKW indicates to write output. The asterisk indicates that all lines should be written, and STEM mydata. indicates the source of the lines to write. FINIS will automatically close the file after processing.

EXECIO stops writing data when it encounters the first null variable in the array. So it processes sequentially through the array -- you can't have null values interspersed inside your array data if you intend to write it all out. You can fill in the 0^{th} array element before writing the data, but it doesn't matter: EXECIO doesn't use it.

Example (2) writes 20 lines to the output file from the mydata. array.

Appendix N

Example (3) shows how to position to a specific record in the sequential file for reading. The **9** combined with keyword SKIP tells EXECIO to skip past the first 9 lines of the file. A subsequent read will start at record number 10.

Example (4) issues a Rexx QUEUED function to discover how many lines are in the data stack. The subsequent EXECIO refers to this number when writing the stack's contents to the output file.

Note the proper use of the quotation marks to ensure that variable substitution occurs for the Rexx variable $number_in_q$.

FINIS closes the dataset after the write operation completes.

Stack Processing

After issuing an EXECIO statement that reads data into the stack, your Rexx program will likely process that data in some manner.

Remember that element zero in the array (eg, element myarray.0) tells you how many lines EXECIO has placed on the stack as a result of its read operation.

You might want to employ the various TSO/E commands that manipulate stacks: NEWSTACK, DELSTACK, and QSTACK. Buffer commands can be useful too: MAKEBUF, DROPBUF, QBUF, and QELEM.

In Chapter 29, pages 502 and 503 explain these commands and provide examples of their use.

z/VM CMS provides very similar stack and buffer manipulation commands. These are summarized on page 499 in Chapter 29.

Example Programs

Let's conclude by discussing a few brief example programs.

This simple script reads all data from a file into an array, then shows how to process it.

```
/* REXX - reads and processes an entire dataset using an array */
"ALLOC F(indd) DA(input.data) SHR REUSE"
"EXECIO * DISKR indd (STEM myarray."
Do i = 1 to myarray.0
    Say 'Processing item: ' myarray.i
End
Exit
```

You can see that the processing loop uses the value that EXECIO put into array element 0 (myarray.0) to determine the number of lines that were read into the array. The DO loop then processes all the array elements.

Here's an example program that copies the contents of a data file to a new dataset. It's taken from the IBM manual *TSO/E REXX User's Guide*.

This example shows how you can use stack manipulation commands like NEWSTACK and DELSTACK to create and manage your own data stack. (It can be useful to create a new stack for your program, otherwise you won't be able to distinguish what the stack already contained versus what your program read into it.) Since the program uses a stack it created (rather than a Rexx array), it needs to manually append a null entry to the stack with the QUEUE instruction. The EXECIO DISKW statement depends on the presence of the null entry to know when to stop writing out data.

Here's a last example, written by mainframe expert and author Lionel B. Dyck. This program reads a dataset, finds all lines that contain the string DSN=, and then generates a list of all dataset names (DSNs) that appear in the input file.

```
/* REXX exec to find and report all datasets */
arg input
"Alloc F(in) DS("input") shr"
"Execio * diskr in (finis stem in."
"Free F(in)"
j = 0
do i = 1 to in.0
    if pos("DSN=",in.i) = 0 then iterate
    parse value in.i with . "DSN="dsn .
    parse value dsn with dsn"," .
    j = j + 1
    out.j = dsn
end
"Alloc f(out) ds(*)"
"Execio * Diskw out (finis stem out."
"Free f(out)"
```

The program starts by accepting a command line argument that tells it the name of the file to process. It then feeds this argument into the ALLOC statement. Note how the double quotation marks are coded so that variable substitution occurs for the Rexx variable named input.

The EXECIO statement then reads the entire dataset into the array or table named in.

The finis keyword closes the dataset after it's read, and the FREE command deallocates it.

The do loop processes all items in the array, driven the by number of items that EXECIO set in array variable in.0.

The pos function determines if the string DSN= occurs in a line of data. If so, the dataset name is isolated and added to the array named out.


After all lines have been processed, the final ALLOC statement assigns the output to the user's terminal or display. This is the function of the asterisk in this code:

```
"Alloc f(out) ds(*)"
```

The final EXECIO writes the data to the user in a single statement. FREE deallocates the dataset.

One other point to note. This program allocates and deallocates datasets as needed (when they will be used). This contrasts to the common coding practice of allocating all files a script will use at its start, then deallocating all of them when the script ends.

This script's design is more efficient because it locks file resources for the minimal possible duration. In a quick-running program, the difference may not matter, but in a long-running program, this approach is more judicious. This algorithm takes advantage of EXECIO's ability to read an entire file in a single statement.

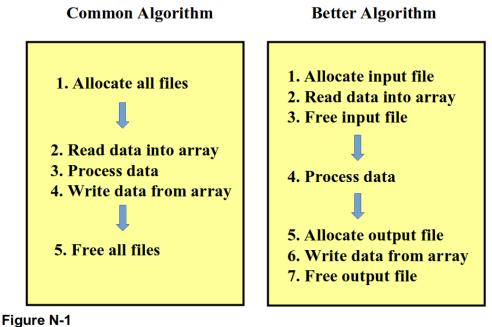

rigure in-

Summary

In this appendix we explored the uses of the EXECIO statement and how to code it. EXECIO is very flexible and powerful, and yet it is easy to code and understand.

EXECIO is quite popular in mainframe environments. Some sites don't use Rexx's streaming I/O facilities for file processing at all.

EXECIO is common to all three mainframe operating systems, OS, VM, and VSE. The command is very similar -- but not exactly the same -- across all three platforms. We've described its use here on OS TSO/E systems. EXECIO is usually not available when running Rexx on systems other than mainframes.

You can find further information on EXECIO in several IBM manuals, especially the *TSO/E REXX User's Guide* and the *TSO/E REXX Reference* for OS systems. For VM systems, look in the *z/VM CMS Command and Utilities Reference*. All manuals are available for free download at www.RexxInfo.org.

The Stream I/O Function Package for TSO/E Rexx is described in detail in the manual *IBM Compiler and Library for REXX on IBM Z.*



How to Write Edit Macros

by Howard Fosdick and Willy Jensen

Overview

Ever wish you could tailor the behavior of your text editor to your own preferences? Or make it easier and quicker to use?

Edit macros allow you to do exactly that.

An *edit macro* is a Rexx script that you run that affects or drives the behavior of your text editor. It can make it easier for you to:

Quickly perform operations
Execute repeated tasks
Automate routine or repetitive tasks
Simplify your use of the editor
Customize or tailor or extend your editor
pendix explains how to write Rexx edit macros to work with common editors. We'll the coding requirements for macros and walk through a couple examples.
er you can write an edit macro for any particular editor depends on whether that editor ts this feature. Some common text editors you can write Rexx edit macros for include:
ISPF – available on most mainframes
Xedit – a mainframe editor widely used on z/VM
THE – available for Windows, Linux, Unix, BSD, and many other platforms
KEDIT – a commercial Windows editor

ISPF Editor Macros

Let's explore how to write Rexx edit macros for the editor available on most mainframes: Interactive System Productivity Facility editor, or ISPF. To simply the discussion, we'll assume you're on a z/OS system using TSO/E.

You typically create your Rexx macro as a member of a partitioned dataset. They can reside in any of several concatenations, normally SYSPROC, SYSUPROC, SYSEXEC, SYSUEXEC, or an activated ALTLIB.

The name of the dataset you create is your macro's name. The first line of code should contain the word REXX inside a comment, such as: /* REXX */

The second statement in the macro should direct commands to the edit processor, ADDRESS ISREDIT. Remember that otherwise Rexx sends commands to the default command environment (TSO on z/OS systems).

You can look at an edit macro as a subcommand to the ISPF editor. It's executed just as if it were an editor subcommand. To run it, you just enter its name on the editor's command line.

A macro can contain these statements:

Edit oub common do

ш	Ean subcommands
	Other edit macro commands
	TSO commands
	Rexx statements
	ISPF and PDF dialog service requests

A Simple Example

Here's a simple example. This macro named ONLY from Willy Jensen displays only lines containing specific content. The user inputs what that string content is as a command line parameter when he runs the macro. Here's the code:

```
/* rexx    by Willy Jensen
    Show only records with specified content
*/
Address isredit "MACRO (PRM) NOPROCESS"
Address isredit
"reset"
"x all"
"find all" prm
exit 0
```

As required, the macro starts with a first line comment containing the word rexx. The first executable line of code is the Address isredit statement. It captures the user's input parameter into the variable PRM. The NOPROCESS parameter simply means that the macro will be executed after all the ISPF edit line commands are processed.

The second Address isredit statement has no command associated with it. So, that tells the processor to direct all subsequent commands in the script to the editor (rather than the default of TSO/E).

Editor commands reset and x all remove all messages and lines from view in the data viewing area.

The command "find all" prm then completes the program's task. It ensures that all the lines containing the string in the prm variable appear in the data area. So the macro exits.

Another Example

Here's another useful macro from Willy Jensen. This one is called UNIQUE. It deletes any duplicate records from the dataset you're editing:

```
rexx by Willy Jensen
Unique
Edit macro - delete duplicate lines
 Address Isredit "MACRO NOPROCESS (PRM)"
 Address Isredit
 sf.=''
 "reset"
 /* scan data */
 "(lines) = linenum .zl"
 dn=0
 Do lnr=1 to lines
   "(s) = Line (lnr)"
   s='a'strip(s,'t')
   if sf.s<>'' then do
     "label" lnr "= .xdup"
     "flip .xdup"
     dn=dn+1
   end
   else sf.s=lnr
 End
 "delete all x"
 exit xmsg(dn 'lines deleted')
 XMSG:
 parse arg zedlmsg
 address ispexec"setmsg msg(isrz000)"
 return 0
```

Appendix O

This macro starts with the same three lines as the previous example. These declare that it's written in Rexx, that it's an edit macro, and that all subsequent lines Rexx passes to an outside environment for execution will go to the editor rather than to TSO.

The program logic starts after the /* scan data */ comment. The number of lines we're processing is assigned to the variable lines. This value controls the do loop, as the loop processes one line at a time.

Inside the loop, you see a clever use of an associative array to see if a line is a duplicate that has been processed previously. This logic is directed at the compound variable (array) named sf.. (To learn about associative arrays, see Chapter 4.)

If a line is determined to be a duplicate, this command assigns it a label as such: "label" lnr "= .xdup"

In this case, this statement increments the counter of duplicated lines: dn=dn+1

This command completes the processing by deleting all the lines marked as duplicated: "delete all x"

A Last Example

Sometimes it's educational to review code written by different people to get an idea of stylistic differences. So here's an ISPF macro example from a different source.

This final example is straight from the IBM z/OS manual, *ISPF Edit and Edit Macros*. That's the essential reference manual for learning more about how to write edit macros. Along with background information, that manual lists and defines all edit line commands, primary commands, macro commands, and assignment statements. (You can download it along with all other Rexx-related IBM manuals at www.RexxInfo.org.)

This example program is named ISRMBRS. It enables you to make global changes to all members in a partitioned data set. Or you could use it to search all PDS members for a specific data string.

The way it works is that you start this macro and pass to it the name of the or macro you want to run against all PDS members. Then it turns around and applies that macro to each member of the PDS.

You invoke this macro from the editor command line as: ISRMBRS macname

macname is the name of the macro you want run against each PDS member.

Here's the program:

668

```
/\star ISPF edit macro to process all members of partitioned data set, \star/
/* running a second, user-specified, ISPF edit macro against each
/* member.
/*
/* To run:
/* Enter "ISRMBRS macname" on the command line, where macname is
/* the macro you want run against each member.
/****************************
'ISREDIT MACRO (NESTMAC)'
/* Get dataid for data set and issue LMOPEN
'ISREDIT (DATA1) = DATAID'
'ISREDIT (CURMEM) = MEMBER'
Address ispexec 'LMOPEN DATAID('data1') OPTION(INPUT)'
member = ' '
lmrc = 0
/************************/
/* Loop through all members in the PDS, issuing the EDIT service for */
/st each. The macro specified on the ALLMEMS invocation is passed as st/
/* an initial macro on the EDIT service call.
/******************************
Do While lmrc = 0
Address ispexec 'LMMLIST DATAID('data1') OPTION(LIST),
            MEMBER (MEMBER) STATS (NO) '
 lmrc = rc
 If lmrc = 0 & member ^= curmem Then
  do
    Say 'Processing member' member
    Address ispexec 'EDIT DATAID('data1') MEMBER('member')
                MACRO('nestmac')'
  end
/***************************
^{\prime \star} Free the member list and close the dataid for the PDS. ^{\star \prime}
Address ispexec 'LMMLIST DATAID('data1') OPTION(FREE)'
Address ispexec 'LMCLOSE DATAID('data1')'
Exit 0
```

Appendix O

To explain the program, it starts with the keyword REXX in its first comment line, and with the ISREDIT MACRO statement in its first executable line.

Next, the first code block gathers dataset information and issues an LMOPEN to access it. The program uses the ispexec statement to invoke ISPF services (as opposed to ISREDIT, which you use to identify edit macros).

The next coding of Address ispexec invokes the LMMLIST ISPF service. This obtains each PDS member for processing.

The do while loop then issues your macro command against each PDS member. Again, the program is using ISPF services to perform this work. This is the Address ispexec 'EDIT command.

After all PDS members have been processed, the last two lines of code invoke ISPF services to free up the member list and close the dataset.

Summary

This appendix introduced you to Rexx edit macros. You've seen that they can be quite useful for automating all sorts of tasks within an editor like ISPF, Xedit, or THE (The Hessling Editor). If you use an editor day in and day out, edit macros can save you lots of time in handling repetitive tasks. You might well decide to tailor your editor to your personal preferences by using them.

Of course, this very brief introduction just scratched the merest surface of what you can do with edit macros.

To learn more, the website www.RexxInfo.org will direct you to many websites that offer freeware macros. Or, just google for "ISPF Rexx macros" or "The Hessling Editor macros" and you'll find hundreds of usable code examples.

If you code ISPF editor macros, you should access the IBM manual *ISPF*: *Edit and Edit Macros*. It includes background information on how to create ISPF edit macros. It also lists all the edit line commands, edit primary commands, and edit macro commands and assignment statements. These definitions let you know what's available to code in your macros and how to code it.

The IBM manual *ISPF Reference Summary* also details the ISPF Editor commands that you can use in edit macros.

The website www.RexxInfo.org provides free downloads of both of these manuals.



Mainframes: How to Run Rexx in Batch

Introduction

This article tells how to run Rexx as a mainframe batch job. It relies on examples drawn from the IBM manuals.

There are 3 basic ways to run Rexx in batch:

- 1. Run in MVS Batch (IRXJCL)
- 2. Run in an TSO/E environment (IKJEFT01)
- 3. Run in an ISPF environment (IKJEFT01 with ISPSTART)

It's not required in all cases, but it's recommended that you include REXX inside a comment in the first line of your Rexx program.

1. Run in MVS Batch (IRXJCL)

This method is simple. But your Rexx program can not use TSO/E services, TSO commands, or most TSO/E external functions. Your Rexx program can only perform those functions available to programs running in a non-TSO/E address space.

Code your Rexx program as a member of a partitioned dataset (PDS). The dataset name is effectively your program's name.

IRXJCL is a Rexx processor, so it will be the program name on the EXEC statement. You pass it the name of your Rexx program (its PDS member name) by using the PARM keyword.

IRXJCL requires 3 DDNAMES:

- 1. SYSEXEC -- the PDS where your program resides (some sites may use SYSPROC instead)
- 2. SYSTSIN -- terminal input
- 3. SYSTSPRT -- where terminal output is sent to

Thus a minimal job skeleton to run a Rexx program called MYPROG looks like this.

```
//MYJOB    JOB 'ACT101','JOEY',CLASS=J,MSGCLASS=H,NOTIFY=&SYSUID
//MVSBACH    EXEC PGM=IRXJCL,PARM='MYPROG'
//*
//SYSEXEC    DD DSN=USERID.MYREXX.EXEC,DISP=SHR
//SYSTSIN    DD DUMMY
//SYSTSPRT    DD SYSOUT=
```

As in all these examples, your JCL should reside in a fixed block, 80-byte record data set.

Here's a more sophisticated example. It shows how to pass an argument into the Rexx program, as well as how to provide it input data in-stream. This example is straight from the IBM manual *z/OS TSO/E REXX User's Guide*.

```
//USERIDA JOB 'ACCOUNT, DEPT, BLDG', 'PROGRAMMER NAME',
// CLASS=J, MSGCLASS=H, MSGLEVEL=(1,1)
//*
//MVSBACH EXEC PGM=IRXJCL,
// PARM='JCLTEST Test IRXJCL'
//* | | | | |
//* Name of exec <----> | |
//* Argument <---->
//OUTDD DD DSN=USERID.TRACE.OUTPUT, DISP=MOD
//SYSTSPRT DD DSN=USERID.IRXJCL.OUTPUT, DISP=OLD
//SYSEXEC DD DSN=USERID.MYREXX.EXEC, DISP=SHR
//SYSTSIN DD *
First line of data
Second line of data
Third line of data
/*
//
```

In this example, the program name is USERIDA, and it runs a Rexx exec called JCLTEST. JCLTEST is a member residing in the partitioned dataset as USERID.MYREXX.EXEC(JCLTEST). The argument 'Test IRXJCL' follows the member name and is passed to that REXX program as an input parameter. The Rexx program can read in the argument through the statement:

```
PARSE ARG input argument
```

In-stream data input is through the SYSTSIN. Output goes to SYSTSPRT (the DSN named USERID.IRXJCL.OUTPUT). If you wanted output to go to a printer instead of that dataset, you would specify something like:

```
//SYSTSPRT DD SYSOUT=A
```

2. Run in an TSO/E environment (IKJEFT01)

This method gives a batch Rexx program all the benefits and services of running in the TSO/E environment. You obtain that by running the TSO/E batch processing program named IKJEFT01.

In this example, the batch job USERIDA runs the TSO/E processor IKJEFT01. As in the previous example, the name of the Rexx program is MYPROG. It resides in a partitioned dataset specified by SYSEXEC and named USERID.MYREXX.EXEC.

The Rexx program to run is specified in the SYSTSIN input stream. Once again, SYSTSPRT defines the output location.

Instead of specifying your program name via SYSTSIN, you could code it as a PARM to the IKJEFT01 program, as in the previous IRXJCL example.

Assume that you have coded this JCL and placed it in the partitioned dataset named REXX.JCL. That data set should be defined as fixed blocked, 80-byte records. You could start it as a background job by issuing the SUBMIT command, followed by the dataset name:

```
SUBMIT rexx.jcl
```

Appendix P

As an alternative to IKJEFT01, you could instead run either IKJEFT1A or IKJEFT1B. The minor differences between the three programs mainly have to do with how they handle return codes and abends. For most situations, IKJEFT01 works fine.

The above JCL coding example is straight from the IBM manual *z/OS TSO/E REXX User's Guide*. That manual also details the minor differences between IKJEFT01, IKJEFT1A, and IKJEFT1B.

3. Run in an ISPF environment (IKJEFT01 with ISPSTART)

This method runs your batch Rexx program in an ISPF environment. That gives it all the benefits and services of ISPF -- such as ISPF panels and tables, variable management, skeletons, and more. You achieve this by running the TSO/E batch processing program IKJEFT01, as in the previous method, but this time using the ISPSTART command.

As this example shows, you start the TSO Terminal Monitoring program by running program IKJEFT01. Invoking the ISPSTART command after the SYSTSIN input DDNAME is what starts up the ISPF environment. Note how you specify your program name MYPROG as an ISPF command:

One big requirement here is that you allocate the ISPF libraries. These include ISPPLIB (for ISPF panels), ISPMLIB (for ISPF messages), ISPTLIB (for ISPF tables), and ISPPROF (for ISPF profiles). You many have to ask your system programmer the names of these libraries if they differ from those typical shown here.

For **ISPTLIB** (the ISPF tables), specify a temporary data set as its first data set. If you don't, and two jobs run concurrently, one of the jobs could fail with this error message:

```
{\tt ISPT036} Table in use {\tt TBOPEN} issued for table {\tt ISPSPROF} that is in use, {\tt ENQUEUE} failed.
```

Similarly, specify a temporary data set for **ISPPROF** (the ISPF profile). Or, if you specify an existing data set, be sure to specify a Disposition of Old (DISP=OLD). If you don't, you could get that ENQUEUE FAILED message shown above.

You'll often see additional DDNAMES included. These may be required, depending on the kind of processing involved. Examples are ISPSLIB for ISPF skeletons, ISPLLIB (for load modules), ISPTABL (for any output tables), SYSPROC or SYSEXEC (for any CLISTs or REXX scripts), and ISPLOG (to show any logged messages.)

Watch Out For These Concerns

You need to be aware of several concerns unique to batch ISPF processing.

First, remember that there is no user interaction in batch processing. So you have to handle the case where user input is required for any of the DISPLAY services (DISPLAY, TBDISPL, SELECT PANEL, SETMSG, and PQUERY).

One method is to change the DISPLAY service to use the COMMAND parameter:

```
stkbuf = 'END'
'DISPLAY PANEL('panname') COMMAND(stkbuf)'
```

Or, you can alter panels to simulate an END or ENTER key by using the <code>.RESP</code> keyword in your panel definition:

```
)INIT .RESP = ENTER
```

It's possible to encounter an infinite loop during display processing. To prevent this, modify the ISPSTART command by adding the BDISPMAX parameter to limit the total number of displays allowed by your program. BREDIMAX ensures the dialog ends after a specified number of redisplays:

```
ISPSTART CMD (SERVPAN) BDISPMAX (255) BREDIMAX (2)
```

You can also add ISPSTART parameters like BATSCRW (to define the screen width), and BATSCRD (to define screen depth). This command starts ISPF with proper limits to display errors, and a screen width of 132 and depth of 50:

```
ISPSTART CMD(SERVPAN) BATSCRW(132) BATSCRD(50) BDISPMAX(255) BREDIMAX(2)
```

Appendix P

EDIT is another situation that requires user input. So you must supply an initial edit macro to provide the input that would normally be supplied by the user. Be sure to end the macro with an ISREDIT END or ISREDIT CANCEL statement. This ensures that the edit screen is not displayed. Otherwise, you could have an infinite loop.

Abend 998: If you get an Abend 998, check that:

- · All required libraries are allocated
- · All ISPF data element libraries can be opened
- Data element libraries have valid data set characteristics
- All literals modules can be loaded (ISRNLxxx and ISPNLxxx)
- ISPF is not being called recursively

Summary

This appendix described three different ways to run your Rexx programs in batch on mainframes. Running as MVS batch (using IRXJCL) is easy, but the Rexx programs don't have access to many commonly-used TSO services. Running in the TSO/E environment (using IKJEFT01) remedies this. This approach works well for many batch Rexx programs.

If the program needs ISPF services, run it using IKJEFT01 with ISPSTART. Be sure to allocate the several ISPF libraries that are required in this case.

Credits: thank you to IBM for the coding examples in this appendix. See the IBM manuals *TSO/E REXX Users Guide*, *TSO/E REXX Reference*, *TSO/E User's Guide*, and *IBM Compiler and Library for REXX on IBM Z*.



Rexx <--> CLIST Translation

These charts enumerate the equivalences between the Rexx and CLIST languages.

They are for those who know one of these languages and want to learn about the other. They may also be useful for conversions.

(These charts are **not** about "which language is better.")

The Basics

	Rexx	CLIST
Easy to learn, use, and maintain	Yes	Yes
Very powerful	Yes	Yes, but lacks common language features
Open source	Yes	No
Portable	Yes	No
Runs on all platforms	Yes	No
Runs as the mainframe shell	No	Yes
Interfaces to tons of tools	Yes	No (intended to issue OS commands)

Profiles

	Rexx	CLIST
Dialects	TRL-2, ANSI, Mainframe, ooRexx, NetRexx	CLIST
Unique Usage	* Default scripting language for mainframes and several minor platforms * Interfaces to all mainframe environments and address spaces	* Available on all z/OS mainframes
Programming paradigms	Procedural, scripting, object-oriented (ooRexx and NetRexx), functional	Procedural, scripting
OOP: classes, objects, multi- inheritance, polymorphism, encapsulation	In ooRexx and NetRexx	Unsupported
User Group	Rexx Language Association	SHARE
Quick Online Lookup	RexxInfo.org	IBM TSO/E CLISTs Manual
Forum	RexxLA forum	Expert Forum @ IBMMainframes.com
Further information	RexxInfo.org	IBM TSO/E CLISTs Manual

Language Comparison

	ANSI Rexx	CLIST
Format	Free form	Free form
Case-sensitive	No	Yes
Variable Names	Valid Symbol that does not start with a digit (0-9) or a period (.)	Start with & Next character must be one of: A-Z, (a-z), _, #, \$, @
Comments	Enclose inside /* and */	Enclose inside /* and */. Or put comment at end of a line by starting it with /*
Line Continuation	, (comma)	- (minus sign) or + (plus sign)
Statement Separator	; (semi-colon)	None (implied by line end)
More than 1 statement per line	Use ; (semi-colon)	Not permitted
Repeated variable substitution in a line	No (use INTERPRET instruction)	Yes
Code Blocks	Define by do - end	DO-END, SELECT-END (Also DATA- ENDDATA, DATA PROMPT-ENDDATA)
Undefined Variables	Allowed. Use SYMBOL to determine if a variable has been defined	Allowed until misused
Assignment Operators	=	SET =
Arithmetic Operators	+ - * / % ** //	+ - * / ** //
Comparison Operators	== \== >> << >>= \< <<= \>> = \= <> >< > < >= \< = \> (\ can be replaced with ¬ in any of these)	$= EQ = NE < LT > GT <= LE >= GE \Rightarrow NG \rightarrow NL$
Logical Operators	&	AND && OR
Concatenation Operators	Or, concatenate with blank between Or, concatenate by abuttal (no blank)	By abuttal: SET VARIABLE=&VAR1&VAR2
Bitwise Operators	Use built-in functions	Unsupported
Membership Operators	Unsupported	Unsupported
Regular Expressions	Use RexxRE Regular Expressions external Library	Unsupported
Built-in Functions	About 70 functions	15 functions, plus about 55 Control Variables
Data Types	Everything's a string, types are reflected in usage	Defined by usage
Function to Check Data Type	datatype	&DATATYPE

	ANSI Rexx	CLIST
Collections of Variables	Use compound variables	Unsupported, you would have to program this
Associative Arrays	Use compound variables	Unsupported
Multidimensional Arrays	Use compound variables	Unsupported
Stack & Queue Operations	Yes (push, pull, parse pull, queue, queued)	Unsupported as a generalized feature, but can manage the terminal input buffer as a stack
Decimal Arithmetic	Default	Unsupported
Flow of Control	if, do, select, call, exit, return, iterate, leave, signal, nop	IF-THEN-ELSE, DO, SELECT, GOTO, EXIT, RETURN, END, SYSCALL, ATTN, ERROR, TERMIN, TERMING
GOTO	none (use signal)	GOTO
Run External Routine	call	EXEC
Calling Subroutine	call	SYSCALL
Manage Scope of Variables to Subroutines	procedure expose	Use PROC
Subroutine End	return	END
Getting Return Code	special variable RC RESULT set by subroutine RETURN	&LASTCC, &MAXCC for highest return code set
Trace Script Execution	trace (instruction), trace (function)	Use CONTROL statement (CONTROL SYMLIST LIST CONLIST MSG)
Show Full Execution	trace a	CONTROL LIST
Exception Handling	signal	ERROR, ATTN
Standard Exceptions	novalue, error, failure, halt, notready, syntax, lostdigits	ATTN (attention key pressed), ERROR (traps any of more than 100 error conditions)
Attention Routines	signal on halt	ATTN
Run an Operating System Command	Just issue the command string (Rexx passes unrecognized strings to the default active environment)	Just issue the command
Trap TSO/E Command Output	OUTTRAP external function	&SYSOUTTRAP, &SYSOUTLINE
Terminate Process	exit	EXIT
End with Return Code	exit 8	EXIT(8)
Get User Input	say "Enter your name:" parse pull name	WRITE Enter your name: READ NAME
Reading from Terminal	pull, parse instructions	READ, READVAL
Writing to Terminal	say instruction	WRITE, WRITENR

	ANSI Rexx	CLIST
Read Input Record from File	linein execio (mainframe only, not ANSI)	GETFILE
Write Output Record to File	lineout execio (mainframe only, not ANSI)	PUTFILE
Open and Closing Files	function implicit execio (mainframe only, not ANSI)	OPENFILE, CLOSFILE
Array Read/Write	execio (mainframe only, not ANSI)	Unsupported
Detecting File EOF	Sets return code	Treats as a detected error
Write without line feed	Unsupported	WRITENR
Get Date and Time	date and time functions	&SYSDATE, &SYSTIME
String Parsing	PARSE instruction	a few string functions
Get Length of a String	length("MYSTRING")	&LENGTH(MYSTRING)
Get a Substring	substr("MYSTRING",1,4)	&SUBSTR(1:4,MYSTRING)

Sources include RexxInfo.org and the IBM manual *TSO/E CLISTS*. Also *z/OS TSO/E REXX User's Guide* compares Rexx with Clists. Two Rexx books have comparison chapters on this topic: *REXX in the TSO Environment* by Gabriel F. Gargiulo, and *The REXX Handbook* by Gabriel Goldberg and Philip Smith.



Mainframe Rexx <--> ANSI Rexx

These charts enumerate the exact differences between mainframe and ANSI-1996 standard Rexx.

They may be helpful in language conversions, or if you know one of these two language variants and want to learn what is different in the other.

Profiles

	ANSI Rexx	Mainframe Rexx
Usage	* A superset of the original TRL-2 language definition defined in 1996 * Runs on all platforms from cell phones to supercomputers * Several open source interpreters available	* Default scripting language for all IBM mainframe operating systems * The only high-level language that interfaces to all mainframe environments and address spaces
Compiler Available	No	Yes
Open Source	Yes	No
Programming Paradigms	Scripting, Procedural, Functional (not object-oriented)	Scripting, Procedural, Functional (not object-oriented)
User Group	Rexx Language Association	Rexx Language Association
Online Information	www.RexxInfo.org	www.RexxInfo.org
Forum	RexxLA forum	RexxLA forum, Experts Forum @IBMMainframes.com

Language Comparison

	ANSI Rexx	Mainframe Rexx
Requires "Rexx" in 1st line comment	No	Usually
ANSI Symbols (aka character set)	Yes	Yes, a superset
ANSI standards for case-insensitivity, free formatting, etc	Yes	Yes
ANSI String Notations (character, hexadecimal, and binary)	Yes	Yes
ANSI Notations for statement separator, line continuation, comments, assignment, etc	Yes	Yes
ANSI Notation for Parentheses (following functions and for expression evaluation)	Yes	Yes
ANSI Notation for Operators (Arithmetic, Comparison, Logical/Boolean, and Concatenation)	Yes	Yes
ANSI Notation for Compound Variables	Yes	Yes
Instructions Conform to ANSI-1996	Yes	Many small differences from ANSI, listed below
Functions Conform to ANSI-1996	Yes	Many small differences from ANSI, listed below
Includes Instructions beyond ANSI	No	UPPER
Includes Functions beyond ANSI	No	EXTERNALS, FIND, INDEX, JUSTIFY, LINESIZE, USERID
Stream I/O	Yes	z/OS: yes, if Stream I/O Package is installed z/VM: yes
EXECIO	No	Yes
Array Read & Write	No	Yes with EXECIO
DBCS Support	No	Yes via 13 functions
TSO/E External Functions	No	z/OS: yes, 19 External Functions z/VM: covers many of these through similar VM commands
TSO/E Rexx Commands	No	z/OS: yes, 10 Rexx Commands z/VM: covers many of these through similar VM commands
Explicit Terminal Buffer/Stack Manipulation Commands	No	Yes
Run an Operating System Command	Just issue the command string	Just issue the command string

Mainframe Instructions that Differ from ANSI-1996

Instruction	Mainframe Rexx
	z/OS and z/VM do not support two formats introduced by ANSI-1996:
ADDRESS	ADDRESS [environment] [command] [redirection]
	ADDRESS [[VALUE] expression [redirection]]
CALL	z/OS does not support NOTREADY
PARSE	z/OS and z/VM add two more template options: EXTERNAL and NUMERIC. z/OS only supports the LINEIN option if the Stream I/O package is installed, while VM supports this natively.
SIGNAL	z/OS supports the conditions ERROR, FAILURE, HALT, NOVALUE, and SYNTAX. z/VM supports ERROR, FAILURE, HALT, NOTREADY, NOVALUE, and SYNTAX. Neither support LOSTDIGITS.
TRACE	z/OS and z/VM support the additional flags: ! and S. They also support this alternative format for the trace instruction: TRACE [string] [symbol] [[value] expression]
UPPER	A mainframe-only instruction (not in ANSI)

Mainframe Functions that Differ from ANSI-1996

Function	Mainframe Rexx	
ADDRESS	z/OS and z/VM do not support this format: ADDRESS([option])	
CHANGESTR	Unsupported by z/OS and z/VM	
CHARIN	Supported by z/OS if the Stream I/O Package is installed, while VM supports this natively.	
CHAROUT	Supported by z/OS if the Stream I/O Package is installed, while VM supports this natively.	
CHARS	Supported by z/OS if the Stream I/O Package is installed, while VM supports this natively. z/OS and z/VM only support the format of the CHARS function without the C or N option. Returns 1 if there is at least one character available in the stream and 0 otherwise.	
COUNTSTR	Unsupported by z/OS and z/VM	
DATATYPE	z/OS and z/VM add two more TYPES to the list: C returns 1 if string is a mixed SBCS/DBCS string D (Dbcs) returns 1 if string is a DBCS-only string enclosed by SO and SI bytes	
DATE	z/OS and z/VM add two more OPTION_OUT parameters: C (Century) the number of days, including the current day, since and including January 1 of the last year that is a multiple of 100 in the form: ddddd (no leading zeros) J (Julian) date in the format: yyddd	
EXTERNALS	A mainframe-only function (not in ANSI) z/VM: returns the number of elements in the terminal input buffer (system external event queue) z/OS: there is no equivalent buffer. Therefore, in the TSO/E implementation of REXX, the externals function always returns a 0	
FIND	A mainframe-only function (not in ANSI)	
INDEX	A mainframe-only function (not in ANSI)	
JUSTIFY	A mainframe-only function (not in ANSI)	
LINEIN	Supported by z/OS if the Stream I/O Package is installed, while VM supports this natively.	
LINEOUT	Supported by z/OS if the Stream I/O Package is installed, while VM supports this natively.	
LINES	Supported by z/OS if the Stream I/O Package is installed, while VM supports this natively. z/OS and z/VM only support this format: LINES([name]) z/VM: the function returns the number of completed lines remaining in the character input stream.	

LINESIZE	A mainframe-only function (not in ANSI). z/VM: returns the current terminal line width. Returns 0 in any of these cases: * Terminal line size cannot be determined. * Virtual machine is disconnected. * The command CP TERMINAL LINESIZE OFF is in effect. z/OS: if the script runs in foreground, returns the current terminal line width minus 1 (the point at which the language processor breaks lines displayed by the say instruction). If the script runs in background, this function always returns 131. In non-TSO/E address spaces, this function returns the logical record length of the OUTDD file (default is SYSTSPRT).	
QUALIFY	Unsupported by z/OS and z/VM	
STREAM	Supported by z/OS if the Stream I/O Package is installed, while VM supports this natively. Options are implementation and platform dependent, refer to the manual for your interpreter.	
TIME	z/OS and z/VM support solely this format: TIME(option_out)	
TRACE	z/OS and z/VM support two additional settings: ! and S	
USERID	A mainframe-only function (not in ANSI)	

Sources include RexxInfo.org, and the IBM manuals TSO/E REXX Reference and REXX VM Reference.



How to Code with JSON

by Howard Fosdick and Mark Hessling

Overview

There many different formats for data interchange. One that has become very popular as JavaScript has come to prominence is *JavaScript Object Notation*, or JSON.

JSON is:

ш	An open standard for data interchange
	Human readable
	Self-descriptive (labels identify the different data elements)
	Object based
	Usable from any programming language
	Simple to work with and widely used

JSON is one of several common data storage and interchange formats. Recall that Chapter 18 explored how the use the RexxXML package with Rexx. XML, or *Extensible Markup Language*, is an alternative data interchange format to JSON.

XML and JSON are similar standards in that both are human-readable, self-descriptive, and organize data into hierarchies. Each has its advantages. XML was originally designed for describing *documents*. It supports namespaces, comments, and various encoding schemes.

JSON comes from a JavaScript heritage. It was designed to describe data objects and arrays. It's generally considered easier and quicker to read or parse than XML.

In this chapter, we'll explore the Rexx/JSON interface. You can download this interface from Sourceforge at https://sourceforge.net/projects/rexxjson/.

Background

JSON files are data objects that display as readable text files. They were originally designed for transmitting and storing JavaScript objects. Today they are an international standard used by all computer languages.

JSON notation is based on JavaScript and is quite simple:

Appendix S

☐ Name/value pairs descri	ibe each data element
---------------------------	-----------------------

- ☐ Commas separate data elements
- ☐ Curly braces {} hold objects
- ☐ Square brackets [] hold arrays

JSON values are data typed as: object, array, string, number, boolean, or null. Strings are enclosed in double quote marks: "string data". When stored to disk, JSON files typically have the extension: .json.

Rexx/JSON

The Rexx/JSON product is an external function package that lets your Rexx programs to manipulate JSON data. The product includes about three dozen functions. About 20 of them help programs create, modify, and maintain JSON objects and arrays. Another dozen focus on extracting data from JSON data objects. A final half dozen functions help with outputting JSON data and performing administrative tasks.

Here's a very simple Rexx/JSON program. It just creates a JSON data object, and displays it to the user:

Here's sample output from a run of this script. You can see that it's a single object (identified by the curly braces), and that it contains three name/value pairs. The first is a numeric data type, the second is a string, and the last one is boolean:

```
"id": 1,
"message": "Hello",
"flag": true
}
```

To explain the script, the first two executable lines make the Rexx/JSON external function library available to your program. You routinely code these two lines at the start of every Rexx/JSON script:

```
call RxFuncAdd "JSONLoadFuncs", "rexxjson", "JSONLoadFuncs"
call JSONLoadFuncs
```

The JSONCreateObject function creates a new object we've called my obj:

```
my_obj = JSONCreateObject()
```

The next three lines add number, string, and boolean data items to that object, respectively. JSON data elements are always typed, so you use <code>JSONAddNumberToObject</code> to add a number, <code>JSONAddStringToObject</code> to add a character string, and <code>JSONAddBoolToObject</code> to add a boolean flag. In each of these functions, the first parameter gives the object name, while the second and third parameters provide the name and value of the data elements. Thus you create a name/value pair.

Each of these functions returns an internal object element identifier into the variable named item. An empty return value signifies an error occurred, so this is where you would error-check in a program that's not just an example.

The invocation of JSONPrint then displays the three data elements in the object my_obj. Notice how the output respects JSON syntax: curly braces surround the object, and each element presents as aname/value pair, with string values in double-quotation marks.

A Conversion Program

Another competing data standard to JSON is *Comma Separated Values*, or *CSV files*. You're probably familiar with CSV files from spreadsheets, since users routinely export their data to them.

A CSV file consists of a list of data elements separated by commas. Sometimes you'll see strings surrounded in quotation marks, but usually you won't. Like JSON files, CSV files are simple and human-readable. But JSON files are object-oriented, whereas CSV files are not. CSV files have no notion of objects (or arrays for that matter). They're simply a series of strings, separated by commas.

JSON identifies or tags each data element with its name. These are its name/value pairs. Thus, JSON files are *self-descriptive*. CSV files only contain the data elements themselves, without labels of any kind. So JSON is a bit more sophisticated in its structure.

Let's take a look at a simple program that reads a CSV file exported from a Microsoft Excel spreadsheet. The program converts each record into a JSON object and transmits it.

The CSV input file is in this format. There may be from one to three phone numbers per record (that is, per person):

```
last name, first name, email1, email2, phone1, phone2, phone3
```

Here's a short, three line sample input file:

```
Duck, Donald J., theduck@abl.com, topduck@sbc.com, 555-1717, 555-4751, 555-7395 Roadrunner, King, fastone@sbc.org, catchme@abc.com, 555-1111, , Pig, Porky, porker@abc.net, thepig@cec.com, 555-8787, 555-0012,
```

The output from the program (below) shows how it has encoded this CSV data into three JSON object instances. Each is identified by the required curly braces.

Within each object are two JSON arrays, denoted by brackets. The first is the <code>email_array</code>, which contains two email addresses. The second is the <code>phone_array</code>, which contains from one to three telephone numbers. Missing phone numbers are represented as null strings. They could have alternatively have been represented the JSON <code>null</code> data type.

This screenshot shows the program's output. These are the data objects this program would transmit:

```
rexxjson 1.0.1 16 Aug 2023 cJSON v1.7.15

{"last_name":"Duck","first_name":"Donald J.","email_array":["theduck@abl.com","t
opduck@sbc.com"],"phone_array":["555-1717","555-4751","555-7395"]>

{"last_name":"Roadrunner","first_name":"King","email_array":["fastone@sbc.org","
catchme@abc.com"],"phone_array":["555-1111","",""]>

{"last_name":"Pig","first_name":"Porky","email_array":["porker@abc.net","thepig@
cec.com"],"phone_array":["555-8787","555-0012",""]>
```

```
call RxFuncAdd "JSONLoadFuncs", "rexxjson", "JSONLoadFuncs"
call JSONLoadFuncs
say JSONVariable("version") JSONGetVersion()
sav
                               /* read the file name supplied on the command line */
parse arg filename
do while lines(filename) > 0
  parse linein last ',' first ',' email1 ',' email2 ',' phone1 ',' phone2 ',' phone3
  /* create the record object, add last and first names to it */
  record obj = JSONCreateObject()
  item = JSONAddStringToObject( record obj, "last name", last, "first name", first )
  /* create two arrays, for the emails and phone numbers
  email_array = JSONAddArrayToObject( record_obj, "email_array" )
  phone array = JSONAddArrayToObject( record obj, "phone array")
   /* add emails and phone number(s) to the two arrays
  item = JSONAddStringToArray( email array, email1, email2 )
  call JSONAddStringToArray phone_array, phone1, phone2, phone3
  /* here's where you stringify and then transmit the object
  say JSONStringify( record obj )
  call JSONDelete record_obj
```

The above program starts with the two mandatory lines that invoke access to the Rexx/JSON external function library. The third line uses functions <code>JSONVariable</code> and <code>JSONGetVersion</code> to print the first line you see in the program output. That line lists the version of the Rexx/JSON product.

The parse arg filename statement accepts the name of the CSV file to process from command line input. Then, the do while loop will process each CSV file line, one at a time.

The parse linein instruction separates the input line into its constituent data items, recognizing that commas delimit the data. Then the JSONCreateObject function creates an object instance to contain the data from one line of CSV data.

The JSONADDStringToObject function adds the person's last name and first name as strings into the object. Note that the JSON standard uses double quotation marks for strings (whereas it's common to see either single or double quotation marks in Rexx).

The two JSONAddArrayToObject functions define the email and phone arrays as part of the object record_obj. Then the two JSONAddStringToArray functions add the email and phone values to the object. To illustrate different coding techniques, the first invokes JSONAddStringToArray as an inline function, while the second one uses a call instruction.

Note that the <code>JSONAddStringToArray</code> function accepts multiple arguments, so we require only a single invocation to add two email addresses, or to add multiple phone numbers.

In JSON, you must convert an object to a string to either transmit, display, or print it. This is referred to as "stringifying" the object. The JSONStringify function performs this task.

The program simply displays the stringified records to the user. If you wanted to transmit them, this is where that statement would be placed.

Finally, the program deletes the object via JSONDelete and ends.

You could alternately code this program by creating a single object at the start of the program, then reusing that object (instead of continually creating and deleting objects for each record). You would use functions like <code>JSONDelete, JSONDeleteItemFromArray</code>, and <code>JSONDeleteItemFromObject</code> to delete elements from the <code>JSON</code> object in order to implement this change.

Using JSON for Passing Data Objects

You can also use Rexx/JSON objects to pass structured data between subroutines in a program. This is an alternative to using the traditional procedure ... expose mechanism for that purpose.

With Rexx/JSON, you can create a JSON data object in a program and then pass it into a subroutine that accesses it with parse arg. The subroutine could manipulate the object's contents. Then the calling routine can access the object's changed contents when the subroutine completes. Here's an example:

```
call RxFuncAdd "JSONLoadFuncs", "rexxjson", "JSONLoadFuncs"
call JSONLoadFuncs

employee.!id = 10
employee.!name = 'Mark'
employee.!available = 1
employee_object = JSONCreateObjectFromStem( 'employee.!' )
boss_object = JSONCreateObject( 'id', 20, 'name', 'Kate' )
```

Appendix S

```
call JSONAddObjectToObject employee_object, 'boss', boss_object
call mysub employee_object
say 'Still available? ' JSONGetObjectItemValue(employee_object, 'available')
call JSONDelete employee_object
exit 0

mysub: procedure
parse arg object
count = JSONObjectToStem(object, 'stem.!')
say 'Value of id is:' stem.!id
say 'Value of name is:' stem.!name
say 'Value of available is:' stem.!available
say 'Value of boss name is:' JSONGetObjectItemValue(stem.!boss, 'name')
call JSONDeleteItemFromObject object, 'available'
call JSONAddBoolToObject object, 'available', 0
return
```

The output from this program is:

```
Value of id is: 10
Value of name is: Mark
Value of available is: 1
Value of boss name is: Kate
Still available? 0
```

So, JSON provides a handy means to pass data between subroutines. It best applies to situations where the data lends itself to mapping into structured JSON data objects.

Summary

JSON is a very popular data interchange and storage format driven the dominance of JavaScript in web programming. It's a simple human-readable format that offers an alternative to XML and CSV files, among many other options.

This appendix walked you through a few example programs to orient you to Rexx/JSON programming. The manual that downloads with the product offers all the detail you'll need to code more sophisticated Rexx/JSON scripts.

Thank you to Mark Hessling for use of his code example, and for his years of leadership and support for key Rexx tools including Rexx/JSON, the Regina Rexx interpreter, and a dozen others you can download at www.Rexx.org.



Java Integration

By Howard Fosdick and Dr Rony G. Flatscher

Overview

Since its invention in the 1990s, Java has risen to rank as one of the world's most popular programming languages.

Part of this popularity has to do with the wide range of supporting classes and methods available in its vast free code repositories. The result is that many products feature Java automation "hooks" or application programming interfaces (APIs).

Java has thus become the common vehicle to automate many program products. Examples span the gamut from Android applications, to office suites like LibreOffice, to the SAP enterprise resource planning product, and more.

Rexx fully integrates with Java. So all Java capabilities are available through Rexx. This chapter describes two different ways to capitalize on Java's strengths and benefits with Rexx.

NetRexx

One way to integrate Rexx and Java is through NetRexx. As described in Chapter 30, the NetRexx language was developed by Rexx's inventor, Michael Cowlishaw. It's a Rexx-like language that features syntax similar to standard Rexx, but uses the Java Virtual Machine and fully integrates with Java. In fact, NetRexx was the first language after Java itself to use the JVM.

NetRexx enables you to develop Java applications, servlets, Java server pages, and beans. It employs all Java classes and methods. The advantage to NetRexx is that it allows you to script in a simpler, Rexx-like language, instead of programming the more syntax-oriented and difficult Java. You get the benefits of easier coding, higher productivity, and better assurance of code quality by using NetRexx.

In sum, NetRexx makes Java easier. Chapter 30 provides more detail and a basic introduction to the language.

BSF4Rexx and BSF4ooRexx

Another approach to integrating Rexx with Java is to use one of the two tools that bridge the worlds of Rexx and Java.

Bean Scripting Framework for Rexx, or BSF4Rexx, allows you to use all Java's classes and methods from a classic procedural Rexx interpreter, such as Regina Rexx.

Bean Scripting Framework for ooRexx, or BSF400Rexx, enables you do the same when using Open Object Rexx. It makes it possible to fully exploit Java and all its facilities while programming in ooRexx.

BSF4ooRexx is the more popular of the two products, since ooRexx is object-oriented and most who want to leverage Java capabilities prefer object-oriented programming.

Let's take a closer look at BSF4ooRexx.

Installation

BSF4ooRexx comes in the form of an external Rexx function library. A base package called BSF.CLS supplies BSF and its routines that camouflage Java as ooRexx, and thereby give ooRexx the ability to exploit all Java objects, classes, and methods (regardless of their origins).

Note that BSF4ooRexx is a two-way bridge. It also allows Java programs to interact with ooRexx objects, that is, to send messages to ooRexx objects.

You can download BSF4ooRexx from its home at SourceForge at https://sourceforge.net/projects/bsf4oorexx/. The download includes the product, installation instructions, all the documentation, and tons of useful programming examples and tutorials. Download the version -- 32- or 64- bit -- that matches your computer.

The product runs with ooRexx in all its environments: Windows, Linux, and macOS. Be sure to read the installation instructions for your particular platform.

The two prerequisites for BSF4ooRexx are Open Object Rexx, and a Java environment. Java can be either the Java Development Kit (JDK) or the Java Runtime Environment (JRE), depending on your goals. Java can be downloaded from any of several sources including Oracle Corporation at www.java.com, www.OpenJDK.org, and BellSoft at www.bell-sw.com.

JavaFX is recommended as a platform for developing and supporting web and desktop applications. It's available at most websites that support Java downloads.

Once you've downloaded BSF4ooRexx, uncompress it ("unzip" it), and run its install script. The platform-specific instructions with the product give you exact details. You may have to set a couple environmental variables, for example.

You'll notice that the product's directory structure is optimized to make installation and use as simple as possible. For example, the library or lib directory is where you could copy any Java archives (or .jar files) to ensure that they're accessible. Documentation, sample code, and other items are clearly separated into their own subdirectories.

Examples

BSF4ooRexx ships with dozens of well-documented coding examples. We'll present just a couple very simple ones here to give you a feel for how the product works. You'll easily learn much more from the example code and documentation that ship with product itself.

These code snippets were all written by Dr Rony G. Flatscher, inventor of BSF4ooRexx and the key developer behind it. They're all adopted from his many excellent tutorials on how to use BSF4ooRexx.

This first code snippet shows how you could create an instance of a Java class, in this case, java.awt.Dimension. The BSF class helps you create this object using the required fully qualified class name. The ooRexx script simply displays the string that the message toString returns.

Note how the ::requires directive loads the ooRexx to Java bridge.

```
dim=.bsf~new("java.awt.Dimension", 100, 200) -- create with width and height
say dim~toString -- show string value
::requires BSF.CLS -- get Java support
```

Program output would look like this:

```
java.awt.Dimension[width=100,height=200]
```

Here's an enhanced version of the program that shows how you can use Java fields as attributes in your ooRexx code:

```
-- see Javadocs: search Internet with "javadoc java.awt.Dimension" dim=.bsf~new("java.awt.Dimension", 100, 200) say dim~toString dim~height=321 -- treat field height as if it was an ooRexx attribute dim~width =1024 -- treat field width as if it was an ooRexx attribute say dim~toString

::requires BSF.CLS -- get Java support
```

Program output is this:

```
java.awt.Dimension[width=100,height=200]
java.awt.Dimension[width=1024,height=321]
```

This example shows how to import a Java class from within ooRexx with BSF4ooRexx. The imported Java class can be used exactly as if it were an ooRexx class. Remember that you must refer to the fully qualified Java class name, and that Java names are case-sensitive. But the rest of your coding -- in ooRexx -- is not case sensitive. So coding is easier because you don't have to worry about case sensitivity in field and method names.

The first line in the code imports Java class java.awt.Color. Subsequent lines create a new color instance and then render it brighter with the value that brighter returns:

```
red: java.awt.Color[r=255,g=0,b=0]
myColor: java.awt.Color[r=100,g=200,b=3]
brighter: java.awt.Color[r=142,g=255,b=4]
```

Here's a final example that invokes Java class createJavaArray to create and manipulate a Java array.

```
-- create a two-dimensional (5x10) Java Array of type String arr=.bsf~bsf.createJavaArray("java.lang.String", 5, 10)

arr[1,1]="First Element in Java array." -- place an element arr~put("Last Element in Java array.", 5, 10) -- place another one

do o over arr -- loop over elements in array (makearray) say o end say

do with index i item o over arr -- loop over elements in array say i":" o end

::requires BSF.CLS -- loads Java support
```

Here's sample output:

```
First Element in Java array.

Last Element in Java array.

1,1: First Element in Java array.

5,10: Last Element in Java array.
```

As you can see, you can use the Java array object in your ooRexx code exactly as if it were a Rexx array. Indices start at 1, and you can use all ooRexx array methods like "AT", "[]", "PUT", "[]=", "supplier", and the like. You can process the array with ooRexx logical constructs such as do ... over and do with ... over.

Potential Uses

The ways you can apply a generalized tool like BSF4ooRexx are limited only by your imagination. Some examples shipped with the product show how to use it with:

Office suites like LibreOffice and OpenOffice
Microsoft's .NET platform for software development
C# classes
The Extensible Stylesheet Language (XSL) used to manipulate Extensible Markup Language (XML) documents
Java classes like DOM and SAX for working with XML
Java Application Control Language (JACL) scripts
The Java2D (JDOR) to ooRexx interface
All other Java classes, methods, and objects

Summary

Rexx fully integrates with Java, much more so than most programming languages. Combining Rexx with Java gives you the best of both worlds: huge Java code repositories and all Java's capabilities, along with Rexx's strengths in ease of use, coding, and software maintenance.

There are two basic ways to meld Rexx and Java. One is to use NetRexx, the first language after Java to use the Java Virtual Machine. NetRexx seamlessly integrates with Java in every way.

NetRexx is a "Rexx like" language in that it does not conform to Rexx standards like TRL-2 and ANSI-1996. However, Rexx programmers can pick up the language very quickly (it was designed with that very purpose in mind). And classic Rexx scripts can easily be converted to NetRexx by the free script *Rexx2Nrx*. Chapter 30 provides more information and some simple programming examples.

The other way to integrate Rexx and Java is to use Open Object Rexx along with the Bean Scripting Framework for ooRexx, or BSF4ooRexx.

This tool gives you full access to all Java's repositories and capabilities from within ooRexx. It's a two way bridge -- ooRexx programs can use Java code and tools, and Java programs can use ooRexx code.

For more information on BSF4ooRexx, simply download the product from its home at SourceForge at https://sourceforge.net/projects/bsf4oorexx/. The download comes with a vast array of tutorial documents and example scripts that demonstrate its use with many different tools.

Appendix T

Another good resource is Dr Rony G. Flatscher's website at https://ronyrexx.net/. It contains articles, tutorials, application projects and more using BSF4ooRexx.

Finally, we mention the Rexx Language Association website at www.RexxLA.org. The Rexx LA is the organization charged with formal responsibility for developing and supporting the BSF4ooRexx project.

Thank you to Dr Rony G. Flatscher for permission to use his code examples in this chapter, and for his years of dedicated leadership of the BSF4ooRexx and BSF4Rexx projects.



The Secrets of PARSE

by Frank Clarke

Overview

PARSE is screamingly fast. Whatever needs doing, if it can be done by PARSE, it will be faster than any alternative.

We will look at several instances of PARSE, concentrating on PARSE VALUE, the most flexible parsing method of all. The format of a PARSE VALUE statement is:

```
PARSE VALUE <value-string> WITH <template>
```

Incrementing a Stem Array

It's not at all uncommon to see stem arrays incremented/populated as follows:

```
zx = stem.0 + 1

stem.zx = 'stuff associated with zx'

stem.0 = zx
```

While there's nothing 'wrong' with that, consider what PARSE VALUE can do for it:

```
parse value stem.0+1 'stuff associated with zx' with, zx stem.zx 1 stem.0 .
```

The value string is formed by adding 1 to the current value of stem.0 and then appending whatever is to be stowed in the next element of the array. The template orders the first word of the value string to be assigned to variable zx and the remainder to be loaded to stem.zx. The parsing position is then reset to 1 (the beginning of the string) and the first word loaded to stem.0, discarding the remainder. The effect is exactly what is accomplished by the 3-line example above. One PARSE eliminates three statements. It takes a bit of analysis the first time one sees it, but after that, it will seem as natural as breathing.

Setting a Variable to a Specified Value or its Default

We'll assume here that GETVAL is a local subroutine that fetches a value based on some 'KEY'. What we typically see is:

```
key_value = GETVAL( 'KEY' )
if key_value = '' then,
   key_value = 'The.Default.Value'
```

GETVAL is used to provide a value associated with 'KEY' (if such exists). If such does **not** exist and GETVAL returns a null, the next statement salts key value with the default.

Alternatively, we may:

```
parse value GETVAL( 'KEY' ) 'The.Default.Value' with ,
    key_value .
```

That is, if GETVAL returns a value, it is assigned to key_value and the remainder of the value-string is discarded, but if GETVAL does **not** return a value, the only thing in the value-string will be the default value, and **that** is assigned to key value.

On the theory that "it's better to have and not need than to need and not have", traceability can be built-in to code simply and easily using that same technique:

```
parse var opts "TRACE" tv .
parse value tv "N" with tv .
rc = Trace("O"); rc = Trace(tv)
```

That is, the code looks in variable opts to find the string TRACE and whatever token follows it is loaded to variable tv. If opts does not have a TRACE string, tv will be empty. The next line supplies tv and a default value for tv and loads the first of these back into tv. If tv was originally null because the first PARSE didn't find it, there's still the default and that becomes the final value.

Since we're talking tracing here, the next line turns the Trace off unconditionally and then turns it on with whatever value is in tv. When the enclosing routine is invoked:

```
%DOIT2IT ... trace ?r ...
```

<code>?r</code> (interactive results) is set as the trace mode, and you can watch the program execute line-by-line. If that trace <code>?r</code> wasn't included in the parameter list, the Trace will be <code>N</code> (normal -- effectively 'off') and the program will operate without tracing.

Initializations

It's common to see:

```
adlib = ''
batch = 0
common = ''
default = 121
exc_ct = 0
...
```

but how much easier to:

```
parse value '121' Copies('0 ',30 ) with,
         default batch exc_ct .
parse value '' with,
         adlib common (&c.)
```

To add more variables to either, just add them to the appropriate list, and if that list starts getting too long, change the Copies value to a higher number.

This is especially useful for date/time-setting:

```
parse value Date("S") Time("S") Time("N") with, yyyymmdd sssss hhmmss .
```

because date and time values are guaranteed to be in-synch only if they are all captured in a single statement.

Summary

PARSE VALUE provides speed and flexibility for doing in a single statement many tasks that might otherwise be done by coding several statements.

These examples show how you can leverage it for maximum efficiency.



Array I/O

Overview

Array I/O refers to reading or writing more than a single record to or from a Rexx array with a single instruction. You could, for example, read a hundred records from a file into an array with a single statement. Or, you could write those hundred records from a Rexx table to a file with a single instruction.

You could even read an entire file into an array at once. Or write an entire dataset with one instruction.

Rexx does not formally support array I/O in its two key language definitions, TRL-2 or the ANSI-1996 standard. Nonetheless, array I/O is available to you, regardless of which Rexx interpreter you use.

This chapter explores array I/O. What are its advantages, and how do you code it? Let's get started.

Rexx Arrays

First off, recall how to code arrays. As Chapter 4 elucidated, Rexx implements arrays (or tables) through the means of *compound variables* (or what many call *stem variables*).

A compound variable consists of a *stem* and a *tail*. A simple list or single dimension table can thus be coded as: my_array.i. my_array. is the stem (note that it includes the period), while j is the *tail* or *subscript*.

To perform array I/O, then, you read multiple records from a file into a stem in a single statement. Or you write multiple lines from a stem to a dataset.

Advantages

Array I/O has several advantages.

First, remember that Rexx arrays are dynamically sized. This is perfect for working with files of unknown size. Programming languages that only support preallocated, statically sized arrays do not fit well with array I/O because they lack flexibility. Dynamically-sized arrays allow you to read in any number of records in a single statement and the array will expand as necessary to receive the data.

Second, remember that for most implementations, the size of a Rexx array is limited only by the size of available memory. So reading in an entire dataset and processing it as an array can be both convenient for you as a programmer, and also more machine-efficient.

Finally, remember that Rexx supports a powerful use of arrays usually referred to as associative arrays or content-addressable arrays. That is, you can subscript into your tables with character string values, rather than just numbers. Array I/O reads or writes arrays to/from files based on consecutive array positions. But that's not to say you can't transpose or treat the array as a content addressable structure. This allows for highly efficient algorithms for solving certain kinds of problems. (Examples in this book of associative arrays are the "telephone code look-up" program in Chapter 4, and the "command help" program in Chapter 14.)

Here are some advantages to array I/O:

Coding simplicity (one statement replaces an I/O read or write loop)
Easily process a file as if it were an array
Takes advantage of fast memory speeds for processing file data
I/O may be more efficient for some platforms (as opposed to reading & processing one record at a time)
File locking may be minimized (locks need not be held during a loop that includes processing time)

Let's explore those potential advantages for file locking and maximizing I/O operations. Traditionally, computer programs that process all the records in a file employ an algorithm something like this:

Open the file to read from, and Open the file to write to While there is another record to process

Read the record

Process the record

Write results for that record

End

Close the input and output files

Compare that algorithm to one that reads and writes an entire file in single statements using array I/O:

Open the file to read
Read all records into an array
Close the read file

Process all records in the array

Open a file to write
Write all records from the array to the file
Close the output file

You can see the potential advantages here. Both the input and output files are only used (and locked) for the minimal possible time. Any time required for processing records is excluded from that time period.

Further, the operating system is free to optimize large I/O operations, instead of being told to (logically) operate on a single record at a time. Of course, the savings here – if any – are platform dependent. Different operating systems and their underlying hardware handle I/O blocking and buffering in different ways. But the fact remains that for some platforms, this second algorithm makes for faster I/O as well as minimizing file locking.

Coding Array I/O

So how do you code array I/O? There are several different ways to do this:

RexxUtil -- Recall that Chapter 13 on "Writing Portable Rexx" on pages 206-207 described an external function package named RexxUtil. This cross-platform package runs on all major operating systems with most Rexx interpreters.

RexxUtil includes a collection of ten stem manipulation routines. These enable reading and writing a file into/from a stem with a single function.

Related functions support sorting, searching, and copying the array with single statements, as well as for inserting and deleting elements. There's even a RegStemDoOver function that simulates the construct do \times over y. This makes it easy to code array processing.

EXECIO -- On mainframe operating systems, the EXECIO instruction implements array I/O. Appendix N described EXECIO in detail and provided coding examples. EXECIO allows you to read or write any number of records in a single statement, from a single record all the way up to all those in the entire file. The size of memory is about the only limitation you'll face in using EXECIO.

Appendix V

The first example below reads 100 records into the array mydata. The second statement reads an entire file into the array myarray, and closes the file after the operation:

```
"EXECIO 100 DISKR indd (STEM mydata. "
"EXECIO * DISKR indd (FINIS STEM myarray."
```

Refer to Appendix N for more examples and more detailed discussion.

Open Object Rexx -- ooRexx provides array I/O through built-in methods in its Stream Classes. Methods like arrayIn and arrayOut implement it.

ooRexx also has specialized array processing features. For example, the do over construct makes array processing more convenient. And the Array Class itself includes a couple dozen supporting methods.

BRexx -- As mentioned in Chapter 22 on BRexx, this interpreter ships with its files.r library. Pages 374-375 discuss how this implements array I/O and include a sample program.

These example lines show how to read or write an entire array in single lines:

Address Instruction -- Finally, recall that the address instruction allows coding stems for input, output, and error results from system commands. This feature was added in the ANSI-1996 standard. (See page 216 for discussion.)

Summary

Whichever Rexx interpreter you use, and whatever platform you run it on, array I/O is available to you. Array I/O can potentially make better use of machine resources from the standpoint of I/O operations and resource locking.

Perhaps more importantly, array I/O is easy to program, makes for more readable code, and in some cases can enable better algorithms and more efficient use of machine resources.



Interview Questions

Overview

This appendix offers two sets of questions for Rexx job interviews. The first test covers generic Rexx. The second specifically covers mainframe Rexx.

You should be able to complete each test in about a half hour. This is a "from memory" test only – no cell phone or computer access allowed. The answers appear after the two tests.

25 or more questions answered correctly (about 75%) indicate a credible job candidate. Less than 20 questions correct indicate a candidate who may not be credible.

Job Interview Questions - Generic Test

1. What do these two Rexx statements accomplish?

```
social_security_number = '499-55-1212'
PARSE VAR social_security_number comp1 '-' comp2 '-' comp3 .
```

2. What does TRACE A do? What does TRACE O do?

- 3. Name two of Rexx's three special variables, and explain their purpose.
- 4. How many characters does the CHARIN function return by default? Can it move the read pointer without reading any characters?
- 5. Why do you code a SIGNAL instruction in a Rexx program?
- 6. What is the function of the ADDRESS instruction?
- 7. What is the function of the ADDRESS function?
- 8. What two Rexx instructions can be used to implement a Case construct?
- 9. How do you set the arithmetic precision the number of significant digits for calculations?
- 10. What is the difference between the equal to (=) and strictly equal to (==) operators?
- 11. What is the remainder divide operator and why would you use it?
- 12. What would you encode to uninitialize (or "unassign") two variables named ONE and TWO?
- 13. What is the difference between the PUSH and QUEUE instructions?
- 14. What instruction could you code to leave an endless loop (a "do forever" loop) and proceed to the next statement following the DO loop?
- 15. On a Windows server, you've been put in charge of project to migrate hundreds of classic Rexx programs to Open Object Rexx (ooRexx). All programs you will migrate strictly conform to the ANSI Rexx standard. Would you expect that:
 - (A) Zero program changes will be necessary because ooRexx runs any classic Rexx program
 - (B) The vast majority of programs will run without changes, but you could run into an exception
 - (C) You'll have to rewrite most of the classic Rexx programs to run under ooRexx
 - (D) ooRexx is not compatible with classic Rexx. You'll have to recode all the programs.
- 16. What does the ARG function do when processing input(s) given by a Rexx command (that is, a Rexx script run from the command line)?
 - (A) Parses elements in the exact same as PARSE UPPER ARG
 - (B) Returns the number of arguments passed from the command line into the program
 - (C) Returns 1 if there were one or more arguments passed into the program from the command line, and 0 otherwise
 - (D) Returns the entire command line as the user entered it

- 17. You're downloading a Rexx script from the web that you want to run on your computer. But you notice that your keyboard has no symbol for this one that occurs in the program: \neg . What symbol could you code instead of \neg ?
- 18. How do you code a binary string constant within a Rexx program?
- 19. Between the Rexx comparison, arithmetic, and concatenation operators, which has highest priority?
- 20. For the compound variable List.j what is the stem, and what is the tail (also called the subscript or index)?
- 21. How can you override the default precedence order of operations in a Rexx statement?
- 22. What are the OR and EXCLUSIVE OR operators, and what is the difference in how they operate?
- 23. Why would you code the PROCEDURE EXPOSE instruction?
- 24. When is the NOVALUE condition trap raised?
- 25. When you code a Rexx statement in your program, how can you continue it to a second line?
- 26. Why would you use the DIGITS function?
- 27. When you issue a command to an external environment from your Rexx program, how do you know if that command worked?
- 28. You have an error number (error code), and you want to find out what it means. How can you do this from within a Rexx program?
- 29. Which of these is not one of the standard Rexx keywords for trapping errors: ERROR, FAILURE, HALT, NOTVALID, and SYNTAX?
- 30. In this program, which statement will display output that differs from that of the other two statements?

- 31. Does the PULL instruction alter input data? Does PARSE PULL?
- 32. What is the effect of the period in this statement?

```
PARSE VAR my_string item_one item_two
```

33. How do you initialize all elements of the compound variable stem (aka, an array) named MY_ARRAY. to 0?

Job Interview Questions -- Mainframe Rexx

1. What do these two Rexx statements accomplish?

```
social_security_number = '499-55-1212'
PARSE VAR social security number comp1 '-' comp2 '-' comp3 .
```

- 2. What command can you use to define a new disk dataset for output from a Rexx program running under TSO when you want to specify such parameters as record length, block size, and more?
- 3. Why do you encode a FINIS operand on an EXECIO statement?
- 4. You have a disk dataset consisting of 20 data elements. At a minimum, how many EXECIO statements do you need to read the entire dataset?
- 5. Why do you code a SIGNAL instruction in a Rexx program?
- 6. What is the function of the ADDRESS instruction?
- 7. What is the function of the ADDRESS function?
- 8. What two Rexx instructions can be used to implement a Case construct?
- 9. How do you set the arithmetic precision the number of significant digits for calculations in a Rexx program?
- 10. What is the difference between the equal to (=) and strictly equal to (==) operators?
- 11. What is the remainder divide operator and why would you use it?

- 12. What word is required in the first line of a Rexx program for some execution environments?
- 13. What is the difference between the PUSH and QUEUE instructions?
- 14. What instruction could you code to leave an endless loop (a "do forever" loop) and proceed to the next statement following the DO loop?
- 15. What TSO external function would you code to get information about a dataset?
- 16. What is the function of the SYSCPUS TSO external function?
- 17. How can you enter an immediate command from within TSO?
- 18. What does the immediate command HE do?
- 19. Between the Rexx comparison, arithmetic, and concatenation operators, which has highest priority?
- 20. For the compound variable List.j what is the stem, and what is the tail (also called the subscript or index)?
- 21. How do you code a binary string constant within a Rexx program?
- 22. What are the OR and EXCLUSIVE OR operators, and what is the difference in how they operate?
- 23. What is DBCS and why would you use it?
- 24. When is the NOVALUE condition trap raised?
- 25. When you code a Rexx statement in your program, how can you continue it to a second line?
- 26. Why would you use the DIGITS function?
- 27. You want to speed up the execution of a TSO Rexx program you've just written without changing the program code. What do you do?
- 28. You have an error number (error code), and you want to find out what it means. How can you do this from within a Rexx program?

- 29. You're writing a Rexx program that interfaces to a Db2 table. How can you process each row from the table, one at a time?
- 30. Can you call Db2 database stored procedures from within a Rexx program? How?
- 31. Does the PULL instruction alter input data? Does PARSE PULL?
- 32. What is the effect of the period in this statement?

```
PARSE VAR my_string item_one item_two
```

33. How do you initialize all elements of the compound variable stem (aka, an array) named MY_ARRAY. to 0?

Answers -- Generic Test

1. **Answer:** The first statement initializes the variable **social_security_number** to the character string value **499-555-1212**. The second statement parses it into its three component pieces (as separated by the internal dashes) and places the components into the three variables **comp1**, **comp2**, and **comp3**, respectively.

In other words, comp1 will contain 499, comp2 will contain 555, and comp3 will contain 1212.

- 2. Answer: TRACE A traces all clauses before execution. TRACE O turns off tracing.
- 3. **Answer:** Three special variables are RC, RESULT, and SIGL. RC contains a return code from a command, or a syntax error code. RESULT contains a value passed back from a RETURN instruction in a subroutine. (If a RETURN is encoded without an operand, RESULT is set to unitialized.) SIGL identifies the line number of last instruction that caused a jump to a label.
- 4. **Answer:** The CHARIN function reads one character by default. Yes, you can use CHARIN to position the read pointer without actually reading any characters. For example, CHARIN('TEXT_FILE',1,0) positions the read pointer to the start of TEXT_FILE without reading any characters.
- 5. **Answer:** To enable one of SIGNAL's supported error conditions, and optionally specify its associated routine. Or to disable that error condition. (It's not recommended, but some also use it to simulate the action of a GOTO statement.)
- 6. **Answer:** To set the execution environment for command(s) sent out from a Rexx program.
- 7. **Answer:** To tell your Rexx program what the current external command execution environment is.

- 8. **Answer:** IF and SELECT. (Note that WHEN is a keyword or clause within the SELECT statement; it is not a Rexx instruction.)
- 9. **Answer:** Use the NUMERIC instruction.
- 10. **Answer:** Strict comparison requires that two strings be identical (leading and trailing blanks count in the comparison.)
- 11. **Answer:** The operator is: // . You use it when you want to obtain the remainder of a division operation.
- 12. **Answer:** DROP ONE TWO

Or you could encode a pair of DROP instructions: DROP ONE; DROP TWO;

- 13. **Answer:** PUSH adds an element to the queue or data stack in the order Last-In, First-Out (LIFO). QUEUE adds an element to the queue or data stack in the order First-In, First-Out (FIFO).
- 14. **Answer:** The correct answer is the LEAVE instruction. It alters the flow of control from within a DO loop to the statement following its END clause. Instructions like EXIT and RETURN will break out of the endless loop, but do not direct execution to the code following the DO loop. (You could also use SIGNAL for this purpose but this is poor programming practice.)
- 15. **Answer:** Generally speaking, ooRexx runs classic Rexx programs that conform to the ANSI-1996 Rexx standard without any changes. However, there are rare exceptions (ooRexx lacks a couple new items from that standard.) With "hundreds" of programs involved, you might well run into a few of the exceptions. The best answer is B.
- 16. **Answer:** Answer (C) is correct. (A) is incorrect because it tells what the ARG instruction does, not the ARG function. (B) is incorrect because it tells what ARG does when encoded to parse arguments in a Rexx subroutine or function. It does not tell what happens when ARG processes command line arguments (parameters encoded when Rexx is invoked from the command line). (D) is just plain wrong.
- 17. **Answer:** \neg is the "not" or negation symbol. If your system doesn't support it, just use a backslash instead: \ . For example, instead of coding "not equal" as \neg = you would code it as \=.

- 18. **Answer:** Code it as a string of 0's and 1's within single or double quote marks followed by the letter 'b' or 'B'. Examples: '0101'b or "0101"B.
- 19. **Answer:** Arithmetic.
- 20. **Answer:** The stem is **List.** (it includes the period), and the tail (or subscript or index) is j
- 21. **Answer:** Use parentheses. Enclose the higher precedence operations you want executed first within the parentheses.
- 22. **Answer:** OR is: | EXCLUSIVE OR is: &&

OR means "true if either term is true," while EXCLUSIVE OR means "true if either but not both terms are true."

- 23. **Answer:** You code PROCEDURE EXPOSE to ensure that only the specified list of variables is available (or "exposed") to a subroutine. The subroutine can both read and update any variable(s) that are exposed to it.
- 24. **Answer:** The NOVALUE condition is raised when the NOVALUE error condition is enabled, and a variable is referenced that has not yet been initialized.
- 25. **Answer:** Encode a comma (,) at the end of the line to be continued.
- 26. Answer: It returns the setting of NUMERIC DIGITS (it returns the numeric precision).
- 27. Answer: Inspect the value of the special variable RC. It contains the command's return code.
- 28. **Answer:** One way is to use the ERRORTEXT function. It returns the error text associated with a given error number.
- 29. **Answer:** NOTVALID. For ANSI-standard classic Rexx the trap conditions are ERROR, FAILURE, HALT, NOTREADY, NOVALUE, SYNTAX, and LOSTDIGITS.

30. **Answer:** The outputs from the program will be:

onetwo onetwo one two

The answer is statement (C). It outputs the two variables with an intervening space (or blank). Statement (A) is concatenation by abuttal, while statement (B) uses the concatenation operator. Both output the two variables with no intervening space (or blank).

- 31. **Answer:** PULL automatically translates characters to their uppercase equivalents. PARSE PULL does not alter the data by performing uppercase translation.
- 32. **Answer:** The variable **item_one** contains the first data element parsed from the string called **my_string**, **item_two** contains the second, and the period ignores all subsequent data items. If the period were not encoded, **item_two** would contain the second and all subsequent input data elements concatenated together.
- 33. **Answer:** MY_ARRAY. = 0

Answers - Mainframe Test

- 1. **Answer:** The first statement initializes the variable **social_security_number** to the character string value **499-555-1212**. The second statement parses it into its three component pieces (as separated by the internal dashes) and places the components into the three variables **comp1**, **comp2**, and **comp3**, respectively. In other words, **comp1** will contain **499**, **comp2** will contain **555**, and **comp3** will contain **1212**.
- 2. Answer: ALLOC (or ALLOCATE). BPXWDYN is also correct.
- 3. **Answer:** To close the dataset (optionally after processing it).
- 4. **Answer:** 1. One EXECIO statement can read the entire dataset into an array or table (more accurately called a compound variable), or onto the stack.
- 5. **Answer:** To enable one of SIGNAL's supported error conditions, and optionally specify its associated routine. Or to disable that error condition. (It's not recommended, but some also use it to simulate the action of a GOTO statement.)

- 6. **Answer:** To set the execution environment for command(s) sent out from a Rexx program.
- 7. **Answer:** To tell your Rexx program what the current external command execution environment is.
- 8. **Answer:** IF and SELECT. (Note that WHEN is a keyword or clause within the SELECT statement; it is not a Rexx instruction.)
- 9. **Answer:** Use the NUMERIC instruction.
- 10. **Answer:** Strict comparison requires that two strings be identical (leading and trailing blanks count in the comparison.)
- 11. **Answer:** The operator is: // . You use it when you want to obtain the remainder of a division operation.
- 12. **Answer:** The word REXX placed inside a comment. Example: /* REXX */
- 13. **Answer:** PUSH adds an element to the queue or data stack in the order Last-In, First-Out (LIFO). QUEUE adds an element to the queue or data stack in the order First-In, First-Out (FIFO).
- 14. **Answer:** The correct answer is the LEAVE instruction. It alters the flow of control from within a DO loop to the statement following its END clause. Instructions like EXIT and RETURN will break out of the endless loop, but do not direct execution to the code following the DO loop. (You could also use SIGNAL for this purpose but this is poor programming practice.)
- 15. **Answer:** LISTDSI
- 16. **Answer:** It returns information about the CPUs currently online.
- 17. **Answer:** In TSO, you press the attention interrupt key to enter attention mode. Then you can enter your immediate command (such as HE, HT, HI, etc).
- 18. Answer: Halts execution of the program.
- 19. **Answer:** Arithmetic.
- 20. **Answer:** The stem is **List.** (it includes the period), and the tail (or subscript or index) is j

- 21. **Answer:** Code it as a string of 0's and 1's within single or double quote marks followed by the letter 'b' or 'B'. Examples: '0101'b or "0101"B
- 22. **Answer:** OR is: | EXCLUSIVE OR is: &&

OR means "true if either term is true," while EXCLUSIVE OR means "true if either but not both terms are true."

- 23. **Answer:** DBCS stands for the Double Byte Character Set. In DBCS, each character is represented by two bytes (instead of one). You might use it for working with languages that contain many unique characters, for example, Chinese or Japanese.
- 24. **Answer:** The NOVALUE conditions is raised when the NOVALUE error condition is enabled, and a variable is referenced that has not yet been initialized.
- 25. **Answer:** Encode a comma (,) at the end of the line to be continued.
- 26. Answer: It returns the setting of NUMERIC DIGITS (it returns the numeric precision).
- 27. **Answer:** Use the Rexx compiler.
- 28. **Answer:** One way is to use the ERRORTEXT function. It returns the error text associated with a given error number.
- 29. **Answer:** Declare a cursor. Then use it to retrieve and process the rows one by one.
- 30. Answer: Yes, just use the CALL command, addressed to Db2.
- 31. **Answer:** PULL automatically translates characters to their uppercase equivalents. PARSE PULL does not alter the data by performing uppercase translation.
- 32. **Answer:** The variable **item_one** contains the first data element parsed from the string called **my_string**, **item_two** contains the second, and the period ignores all subsequent data items. If the period were not encoded, **item_two** would contain the second and all subsequent input data elements concatenated together.
- 33. **Answer:** $MY_ARRAY_ = 0$

Thank you to RexxLA members who helped design and debug these questions: Frank, Shmuel, David, Wayne, Rob, Mark, Chip, Walter, and others.



Rexx <--> Bash Translation

 $These \ charts \ enumerate \ equivalences \ between \ Rexx \ and \ Bash \ (Bourne-Again \ Shell).$

They are for those who know one of these languages and wish to learn about the other.

(These charts are **not** about "which language is better.")

The Basics

	Rexx	Bash
Easy to learn, use, and maintain	Yes	No (unfriendly syntax)
Very powerful	Yes	Yes
Open source	Yes	Yes
Portable	Yes	Yes
Runs on all platforms	Yes	Yes, major platforms
Runs as the OS Shell	No *	Yes
Interfaces to tons of tools	Yes	Yes
ANSI or ISO Standard	Yes (ANSI-1996)	Yes (POSIX compliant with extensions)

^{*}Regina Rexx can run in the same process as the Z shell (zsh)

Profiles

	Rexx	Bash
Dialects	TRL-2, ANSI, Mainframe, ooRexx, NetRexx	Bash (a superset of the Bourne shell)
Unique Usage	* Default scripting language for mainframes and several minor platforms * Interfaces to all mainframe environments and address spaces	* Default scripting language for Linux (including on Windows/Linux and Linux on Z mainframes) * Sometimes the default for BSD, Oracle Solaris, older Apples, other systems
Programming paradigms	Procedural, scripting, functional, object- oriented (ooRexx and NetRexx)	Procedural, scripting, functional
OOP: classes, objects, multi- inheritance, polymorphism, encapsulation	In ooRexx and NetRexx	Unsupported
User Group	Rexx Language Association	Free Software Foundation
Quick Online Lookup	RexxInfo.org	DevHints.io, LinuxTutorials.org
Cheat Sheet (printable PDF)vm/cms handbook	RexxInfo.org	LinuxSimply.com, Cheatography.com
Forum	RexxLA forum	LinuxQuestions.org, Linux.org
Further Information	RexxInfo.org	Free Software Foundation: GNU Bash

Language Comparison

	ANSI Rexx	Bash
Formatting	Free form	Free form
Case-sensitive	No	Yes
Comments	Enclose inside /* and */	Start comment with: # Or, use a Here document for commenting out multiple lines
Line Continuation	, (comma)	\ (backslash)
Statement Separator	; (semi-colon)	; (semi-colon)
Code Blocks	Define by do - end	Define by do - done, if - fi, or case - esac
Undefined Variables	Allowed. Use SYMBOL to determine if a variable has been defined	Allowed. To error on undefined variables, code: set -u
Assignment Operators	=	= += -= *= /= %= Compound Bitwise: &= = <<= >>= ^=
Arithmetic Operators	+ - * / % ** //	+ - * / % ** Compound: += -= *= /= %= Evaluate arithmetic expression: \$((expression)) Increment/decrement a value: i++ i ++ii
Comparison Operators	== \== >> << >>= \< <<= \>> = \= <> >< > < >= \< <= \> (\ can be replaced with ¬ in any of th comparison ese)	Integers: -eq -ne -gt -ge -lt -le Strings: = == != > >= < <= =~
Logical Operators	&	&& !(prefix)
Concatenation Operators	Or, concatenate with blank between Or, concatenate by abuttal (no blank)	+= Or, use abuttal: VAR3="\$VAR1\$VAR2"
Bitwise Operators	Use built-in functions	& ^ << >> ~ Compound: &= = <<= >>= ^=
Membership Operators	Unsupported	Unsupported
Built-in Functions	About 70 functions	None in the traditional sense, designed to issue shell and line commands
Data Types	Everything's a string, types are reflected in usage	By default, variables are untyped. Or use "declare" to explicitly type them as: -a, -A, -i, -l, -n, -r, -t, -u, -x

Appendix X

	ANSI Rexx	Bash
Regular Expressions	Use RexxRE Regular Expressions external Library	Yes
String Parsing	PARSE instruction	Use regular expressions
Function to Check Data Type	datatype	declare -p
Collections of Variables	Use compound variables	One-dimensional arrays: declare -a array_name
Associative Arrays	Use compound variables	declare -A array_name
Multidimensional Arrays	Use compound variables	Unsupported
Stack & Queue Operations	Yes (push, pull, parse pull, queue, queued)	No generalized facility (offers a directory stack with pushd, popd, and dirs)
Decimal Arithmetic	Default	Install and use: bc
Flow of Control	if, do, select, call, exit, return, iterate, leave, signal, nop	until, while, for, break, continue, return, exit
Trace Script Execution	trace (instruction), trace (function)	Use the -x option. Run the script: bash -x or inside the script: set -x
Terminate Process	exit	exit
Get User Input	say "Enter your name:" parse pull name	echo -n "Enter your name: " read name
Exception Handling	signal	trap
Standard Exceptions	novalue, error, failure, halt, notready, syntax, lostdigits	trap covers 64 signal specs (list them by: trap -l)
Run an Operating System Command	Just issue the command string (Rexx passes unrecognized strings to the default active environment)	Just issue the command string

Sources: RexxInfo.org and Bash Reference Manual, $v.\,5.2$.



Rexx <--> Python Translation

These charts enumerate equivalences between the Rexx and Python languages.

They are for those who know one of these languages and wish to learn about the other.

(These charts are **not** about "which language is better.")

The Basics

	Rexx	Python
Easy to learn, use, and maintain	Yes	Yes
Very powerful	Yes	Yes
Open source	Yes	Yes
Portable	Yes	Yes
Runs on all platforms	Yes	Yes
Interfaces to tons of tools	Yes	Yes
ANSI or ISO Standard	Yes (ANSI-1996)	No (de facto standard by PEPs)

Profiles

	Rexx	Python
Dialects	TRL-2, ANSI, Mainframe, ooRexx, NetRexx	Version 2.x, Version 3.x, specialized implementations
Unique Usage	* Default scripting language for mainframes and several minor platforms * Interfaces to all mainframe environments and address spaces	* Most popular programming language in the world * Most widely taught language * Ships with many OS's
Programming paradigms	Procedural, object-oriented (ooRexx and NetRexx), functional, scripting	Procedural, object-oriented, functional, scripting
OOP: classes, objects, multi- inheritance, polymorphism, encapsulation	Yes, in ooRexx and NetRexx	Yes
User Group	Rexx Language Association	Python.org Community
Quick Online Lookup	RexxInfo.org	QuickRef.me/python
Cheat Sheet (printable PDF)	RexxInfo.org	Cheatography.com
Forum	RexxLA forum	Python.org forums
Further information	RexxInfo.org	Python.org

Language Comparison

	ANSI Rexx	Python
Formatting	Free form	Based on indentation rules
Case-sensitive	No	Yes
Comments	Enclose inside /* and */	Start line with # or enclose inside triple quotes (""")
Line Continuation	, (comma)	\ (backslash) or implicit
Statement Separator	; (semi-colon)	; (semi-colon)
Code Blocks	Define by do - end	Define by : (colon) plus indentation
Undefined Variables	Allowed. Use SYMBOL to determine if a variable has been defined	Undefined variable raises NameError. Circumvent this by assigning special constant None.
Assignment Operators	=	= += -= *= /= %= //= **= := Bitwise: &= = ^= >>= <<=
Arithmetic Operators	+ - * / % ** //	+ - * / % ** // Compound: += -= *= /= %= //= **=
Comparison Operators	== \== >> << >>= \< <<= \>> = \ = <> >< > < >= \< <= \> (\ can be replaced with ¬ in any of these)	== != > < >= <= Object Identity: is is not
Logical Operators	& && \ (prefix) ¬ (prefix)	and or not
Concatenation Operators	Or concatenate with blank between Or, concatenate by abuttal (no blank)	+ += * (multiple copies of a string) Concatenate literal strings with blank between. Use f-strings. Use join or format methods
Bitwise Operators	Use built-in functions	& ^ ~ << >> Compound: &= = ^= <<= >>=
Membership Operators	Unsupported	in not in
Regular Expressions	Use RexxRE Regular Expressions external Library	Use the re module
Built-in Functions	About 70 functions	About 70 functions
Data Types	Everything's a string, types are reflected in usage	A dynamically typed language with these data types: text (str), numeric (int, float, complex), sequence (list, tuple, range), mapping (dict), set (set, frozenset), boolean (bool), binary (bytes, bytearray, memoryview)

Appendix Y

	ANSI Rexx	Python
Function to Check Data Type	datatype	type
Collections of Variables	Use compound variables	list, tuple, range, set, frozenset, dict, bytearray
Associative Arrays	Use compound variables	Use a dictionary (dict)
Multidimensional Arrays	Use compound variables	Use NumPy library
Stack & Queue Operations	Yes (push, pull, parse pull, queue, queued)	Yes (queue module and deque from collections)
String Parsing	PARSE instruction	String methods or regular expressions
Decimal Arithmetic	Default	Use the decimal module
Flow of Control	if, do, select, call, exit, return, iterate, leave, signal, nop	if, for, while, break, continue, pass, return, exit, quit, match-case
Trace Script Execution	trace (instruction), trace (function)	Use the trace or pdb modules
Terminate Process	exit	exit()
Get User Input	say "Enter your name:" parse pull name	name = input("Enter your name: ")
Exception Handling	signal	try-except-else-finally, raise, with
Standard Exceptions	novalue, error, failure, halt, notready, syntax, lostdigits	SyntaxError, TypeError, NameError, IndexError, KeyError, ValueError, AttributeError, IOError, ZeroDivisionError, ImportError
Run an Operating System Command	Just issue the command string (Rexx passes unrecognized strings to the default active environment)	Use the subprocess module (or older os module)

This Language Comparison Chart maps equivalences between ANSI-1996 Rexx and Python 3.12. Some have suggested that a more appropriate comparison would be between Open Object Rexx and Python. Perhaps. But remember, this chart is not about "which language is better" or "which language has more features." It's meant simply as an aid to those (like myself) who have occasion to work in both these languages.

Sources: RexxInfo.org. Python Tutorial and Python Language Reference (v 3.12.3) from docs.python.org.

BRexx/370 for Mainframe Emulation

Overview

BRexx/370 (or BREXX370) is a port of the BRexx interpreter to mainframe operating systems. It's a free and open source Rexx for IBM mainframe software based on the BRexx interpreter described in Chapter 22.

BRexx/370 is an alternative to the IBM licensed REXX interpreter distributed with IBM operating systems in the mainframe OS, VM, and VSE families.

The Hercules Emulator

The main use for BRexx/370 is with the Hercules *mainframe emulator*. Hercules is an open source product that runs on a variety of host operating systems including Linux, Windows, macOS, BSD, and Solaris. Hercules mimics mainframe instruction sets, and also the *channel programs* that control and manage mainframe disk storage.

The three mainframe architectures Hercules emulates are: System/370, ESA/390, and the latest 64-bit z/Architecture. These three designs underlie all of IBM's mainframe operating systems.

So with Hercules, you could run almost any IBM mainframe operating system on your personal computer. You can "run your own personal mainframe" on your Windows or Linux PC.

There is a fly in this magical ointment, however. IBM carefully controls how it licenses its mainframe operating systems. It does not make current ones available for equipment other than their mainframes.

Thus Hercules users must choose from a set of older IBM operating systems that are either public domain or "copyrighted software provided without charge." Candidates include OS/360, DOS/360, DOS/VS, MVS, VM/370, TSS/370, MUSIC/SP, Multics, and MTS. Other public domain options include Linux on IBM Z and OpenSolaris for System z.

Many Hercules users have settled upon two older but free and legal mainframe operating systems: CMS (VM/370) and MVS (OS/VS 3.8). These two operating systems are the direct ancestors of z/VM and z/OS, respectively. VM/370 dates from the 1970s. It was the last free version of VM, from the days when IBM gave the software away for free when you bought one of their mainframes. MVS 3.8 was in use until the mid-1980s.

The diagram below suggest how the BRexx/370 stack might look running on Hercules.

BRexx/370 BRexx/370 (CMS memory resident) Services like ADDRESS TSO / Services like CMS commands, MVS / COMMAND / LINK; tracing, the stack, immediate VSAM/KSDS, TCP/IP, NJE38, commands, function packages, ISPF, the stack, and more program calls, and more OR **MVS CMS** (OS/VS 3.8) (VM/370) **Hercules Emulator Hercules Emulator Hardware** Hardware

Running atop Hercules

BRexx/370

Figure Z-1

Both VM/370 and MVS 3.8 date from before IBM distributed Rexx. So, the question is: how does one obtain Rexx for them? The answer was obvious: port an open source Rexx.

The BRexx interpreter described in Chapter 22 was well-suited to the challenge. It required some adaptation, which is why it's called BRexx/370. That's also why it's distributed through separate BRexx/370 projects at GitHub (instead of with the main BRexx project).

Several GitHub projects supply BRexx/370. Please read through the rest of this chapter before you decide how to install it.

One approach uses CMS (VM/370). You can download the VM/370 operating system from any of several sources. Perhaps the place to start is the VM Community Edition website at http://www.vm370.org/.

The BRexx/370 code for CMS resides in GitHub at https://github.com/adesutherland/CMS-370-BREXX. This project features a native CMS runtime library and integrated BRexx/370 as memory-resident. Facilities include interfaces for tracing, the stack, CMS immediate commands, BRexx program calls and functions, function package support, the ability to run Rexx scripts as Xedit macros, and more.

Another BRexx/370 GitHub project targets MVS (OS/VS 3.8). The home page for this BRexx/370 distribution at GitHub is https://github.com/mvslovers/brexx370.

BRexx/370 for MVS is well documented. It comes with a *User's Guide, Installation Guide,* and documentation for callable external functions, VSAM, array functions, and 3270 screen formatting.

BRexx/370 for MVS interfaces to a long list of MVS facilities, including VSAM/KSDS, TCP/IP, NJE38, ISPF, ADDRESS TSO, ADDRESS MVS, ADDRESS COMMAND, ADDRESS LINK, 3270 screen formatting services, access to external functions, and more.

The MVS BRexx/370 project is a part of a larger project called **MVS 3.8 TK** (the "TK" stands for TurnKey). This project includes the MVS 3.8 operating system, many OS subsystems, and BRexx/370. It all runs on the Hercules emulator.

Both MVS 3.8 TK and BRexx/370 are distributed in a single download. This makes for a simple install of this complex software. The GitHub project home page for MVS 3.8 TK is at https://github.com/patrickraths/MVS-TK5. The driving website for this software is https://www.prince-webdesign.nl/tk5. You'll find much more detail there. There's also a GibHub project that supplies any of several Docker images for mainframe systems including BRexx/370 at https://github.com/RattyDAVE/docker-ubuntu-hercules-mvs.

Uses

Most who script with BRexx/370 do it because they enjoy controlling their own personal mainframe. They're hobbyists exploring mainframe software in a way that once wasn't possible without buying a mainframe.

Appendix Z

Beyond hobbyist interest, mainframe emulation with Rexx offers some practical uses as well. For example: training. One can become familiar with what it's like to work with 3270 style screens and consoles, and with a vast array of supporting systems. In addition to Rexx, there is Job Control Language, Assembler, VSAM data access, NJE38, and much more. The fact that the operating system is not current, or that some pieces may be missing (for example, Db2 or CICS) doesn't diminish the value of what is offered.

Summary

Using the Hercules emulator, individuals can host CMS VM/370 or MVS 3.8 on their personal computers. BRexx/370 fulfills the need for a free and open source Rexx interpreter for these systems.

The CMS and MVS implementations of BRexx/370 differ in small ways from each other, as well as from IBM's mainframe Rexx. Chapter 29 and Appendices E and R discuss IBM mainframe Rexx. They enumerate exactly how IBM mainframe Rexx differs from ANSI-1996 standard Rexx.

GitHub hosts the BRexx/370 projects:

BRexx/370 for CMS at https://github.com/adesutherland/CMS-370-BREXX
BRexx/370 for MVS at https://github.com/mvslovers/brexx370
MVS~3.8~TK~at~ https://github.com/patrickraths/MVS-TK5
MVS 3.8 TK at https://www.prince-webdesign.nl/tk5
Docker containers for several mainframe operating system projects are at https://github.com/RattyDAVE/docker-ubuntu-hercules-mvs

There is also a forum specifically on MVS TK at https://groups.io/g/turnkey-mvs.

Read more about Hercules in Wikipedia at

https://en.wikipedia.org/wiki/Hercules_(emulator). The home pages for Hercules are at http://www.hercules-390.eu/ and https://sdl-hercules-390.github.io/html/.

You can find several active Hercules discussion groups at https:/groups.io. At that website, just click on "Find or Create a Group" and search for "Hercules".

Thank you to the Rexx Language Association members who contributed to this appendix with their insights and documentation.

Index

\> or ¬> (not greater than operator), 29 && (ampersand, double), logical EXCLUSIVE OR $\$ or \neg < (not less than operator), 29 operator, 30 & (ampersand), logical AND operator, 30 angle brackets > (append to file), 76, 214 > (greater than operator), 29 [] (brackets) >= (greater than or equal to operator), 29 <> or >< (greater than or less than operator), 29 in array indexes, 397 < (less than operator), 29 <= (less than or equal to operator), 29 < (redirect input), 76, 214 > (redirect output), 76, 214 > (strictly greater than operator), 29 >= (strictly greater than or equal to operator), 29 << (strictly less than operator), 29 186 <== (strictly less than or equal to operator), 29 >.> in trace file, 139 >> in trace file, 138 >C> in trace file, 139 >F> in trace file, 139 >L> in trace file, 139 - (minus sign) >0> in trace file, 139 >P> in trace file, 139 >V> in trace file, 138, 139 () (parentheses) * (asterisk) multiplication operator, 27 *-* in trace file, 138

SYMBOLS

** (double asterisk), raise to a power, 27

as ANSI-standard "not" sign, 204, 496

\ or ¬ (logical NOT operator), 30

\= or ¬= (not equal operator), 29

backslash

```
\== or ¬== (strictly not equal operator), 29
  \> or ¬> (strictly not greater than operator), 29
  \<< or ¬<< (strictly not less than operator), 29
{} (braces), vector class reference, 454
  adding or retrieving from collection, 470
 arraylike reference, 453
^ (caret), method invocation prefix, 453
^^ (caret, double), instance creation, 453
:: (colon, double), preceding directives, 465, 470
: (colon), following a label, 42
, (comma), line continuation character, 111, 122, 173,
/*...*/ (comment delimiters), 22
= (equals sign) assignment, 26
 equal comparison operator, 29
== (equals sign, double), strictly equal operator, 29
! (exclamation), command identifier, 454
  negative number prefix operator, 27
  subtraction operator, 27
  affecting order of precedence, 31-32
  enclosing function arguments,23
% (percent), integer division operator, 27
. (period), placeholder variable, 116
+ (plus sign)
  addition operator, 27
  positive number prefix operator, 27
  +++ in trace file, 139
```

? (question mark), placeholder variable, 247, 252	
"" (quotes, double)	<> or >< (greater than or less than operator), 29
enclosing character strings, 23, 26	< (less than operator), 29
enclosing OS commands, 181–182	<= (less than or equal to operator), 29
'' (quotes, single), enclosing character strings, 23, 26	< (redirect input), 76, 214
; (semicolon), line separation character, 59, 173	> (redirect output), 76, 214
/ (slash), division operator, 27	> (strictly greater than operator), 29
// (slash, double), remainder division operator, 27	>= (strictly greater than or equal to operator), 29
~~ (tilde, double), method invocation, 466, 470	<< (strictly less than operator), 29
~ (tilde), method invocation, 453, 465, 466, 470	<== (strictly less than or equal to operator), 29
_ (underscore), in variable names, 171	>.> in trace file, 139
(vertical bar, double), concatenation	>> in trace file, 138
operator, 30–31, 80	>C> in trace file, 139
(vertical bar), logical OR operator, 30	>F> in trace file, 139
	>L> in trace file, 139
A	>0> in trace file, 139
	>P> in trace file, 139
abbrev function, 89, 90–91, 547	>V> in trace file, 138, 139
abs function, 103–104, 547–548	ANSI (American National Standards Institute) ANSI
abstract classes, Open Object Rexx, 467	standard, 8, 193, 194-195, 309, 310
abstraction, roo!, 452	ANSI-standard "not" sign, 204, 496
abuttal concatenation, 80	answers to study questions, 637-655
acos function	ANY condition, 472
BRexx, 364	Apache Web server, programming, 281–288, 624-5
Rexx/imc, 349	API, running Rexx as, 324
active environment, 211	APILOAD function, VM Rexx, 498
ActiveState Web site,258	APPCMVS interface, 505
addition operator (+), 27	Apple iPhone and iPad, 445
address function, 196, 204, 220, 548	application interfaces, using Rexx for, 10
address instruction	ARexx (Amiga Rexx), 323, 573
for commands to other environments, 221	AREXX, functions supported by Regina, 336
definition of, 216-218, 535-536	arg function, 117, 195, 548-549
example using, 218-219, 222-225, 536-537	arg instruction, 81, 115–117, 537
mainframe Rexx, 504	arguments of functions, 23, 25
using stack for command I/O, 225-226	arithmetic operators, 27–28
Administration tool, 387, 399, 615	Array class, Open Object Rexx, 468, 619
Aggregate class, roo!, 455	array names (stem variables), 55
AIX, Rexx for, 321	array references (compound symbols), 54-55
Alarm class, Open Object Rexx, 469, 620	arraylike reference operator ([]), 453
American National Standards Institute. See ANSI	arrays. See also do instruction
Amiga Forum, 532	addressing elements of, 54
Amiga Rexx (ARexx), 323, 573	associative, 54, 60-62
ampersand, double (&&), logical EXCLUSIVE OR	data structures based on, creating, 63-64
operator, 30	declaration of, 53
ampersand (&), logical AND operator, 30	definition of, 53-54
Android 435-445	dense, 53
angle brackets	dimensionality of, 53, 63
> (append to file), 76, 214	example using, 58-60, 61-62
> (greater than operator), 29	
>= (greater than or equal to operator), 29	
(O : 2111 111111 11 141111 11 14111111), ==	

first element of, as 0 or 1, 57	
indexing, Reginald features for, 397	beaming, 441
initializing, 55, 56-57	Bean Scripting Framework, 615, 695-700
NetRexx, 522	beep function
number of elements in, storing,57	Regina, 338, 574
processing all elements in, 56	Reginald, 399
redirecting command I/O to and from, 216-7	bifurcation, 79–80
referencing uninitialized element of, 55	binary numbers, 26
sorting, in Reginald, 396	binding variables, 247, 249-250
sparse, 53	bit function, Reginald, 399
array I/O 374-375, 705-708	bit manipulation functions, Regina,336–337
asin function	bit map indexes, 97
BRexx, 364	bit string functions, 96-97
Rexx/imc, 349	bitand function, 97, 106-107, 549
ask special name, NetRexx, 522, 524, 629	bitchg function, Regina, 336, 574
assignment statements, 25, 26	bitclr function, Regina, 336, 574-575
associative arrays, 54, 60-62	bitcomp function, Regina, 336, 575
Associative Arrays for Rexx package, 615	bitor function, 97, 549
associative memory, 54. See also arrays	bitset function, Regina, 337, 575
asterisk (*)	bittst function, Regina, 337, 575-576
multiplication operator, 27	BitVector class, roo!, 455
- in trace file, 138	bitxor function, 97, 549-550
asterisk, double (**), raise to a power operator, 27	blank lines, 23
atan function	Bochs emulator, 424
BRexx, 364	books. See publications
Rexx/imc, 349	box style comments, 22
attributes (variables), Open Object Rexx, 465	braces ({}), vector class reference, 454
a2u function, BRexx, 368	brackets ([])
AuroraWare! tool, r4 and roo! interpreters, 450	adding or retrieving from collection, 470
	in array indexes, 397
В	arraylike reference, 453
	BRexx interpreter 359-383
backslash	advantages of, 316, 318, 360
as ANSI-standard "not" sign, 204, 496	command I/O, stack for, 368-369
or ¬ (logical NOT operator), 30	definition of, 13, 312, 359-360
\= or ¬= (not equal operator), 29	documentation for, 360, 361
> or ¬> (not greater than operator), 29	downloading, 360–361
\< or ¬< (not less than operator), 29	example using, array 1/0, 374-375 example
\== or ¬== (strictly not equal operator), 29	using, C-language I/O, 369–371 example using
> or ¬> (strictly not greater than operator), 29	external function libraries, 366-367
\<< or ¬<< (strictly not less than operator), 29 Bag class, Open Object Rexx, 468, 619	extra features in,363-366
- · · · · ·	installing, 361–363
balanced tree (B-tree), 63	I/O functions, 364-366
Barron, David (World of Scripting Languages), 11	mathematical functions, 364
base reference, roo!,453	platforms supported by, 359
Bash <> Rexx, 721-724	stack functions, 363
batch procedures, 210	system functions, 363
batch, run Rexx in, 671-676	Windows CE functions, 367–368
b2c function, Regina, 336, 573–574	BRexx/370 729-732
b2d function, Rexx/imc, 350	

B - C

BSD platforms, 8	CGI (Common Gateway Interface)
BSF4ooRexx 695-700	BRexx library for CGI-scripting functions, 367
B-tree (balanced tree), 63	definition of, 273
buffers, relationship to stacks, 167–168	Internet/REXX HHNS WorkBench, 276-281, 616
buftype function	Reginald support for, 388
Regina, 342, 576	Reginald tutorial for, 392
Reginald, 396, 398	Rexx/CGI library (cgi-lib.rxx), 274-276, 615
built-in functions, 110, 120. See also	cgidie function, CGI/Rexx, 274
functions built-in subroutines, 41. See also	CgiEnd function, HHNS WorkBench, 278
subroutines	cgierror function, CGI/Rexx, 274
b2x function, 105, 550	CgiHref function, HHNS WorkBench, 278
byte-oriented I/O. See character-oriented I/O	CgiImg function, HHNS WorkBench, 278
byte-offerfied #O. See Character-offerfied #O	CgiInit function, HHNS WorkBench, 277
	cgi-lib.rxx library (CGI/Rexx), 274-276, 615
C	CgiRefr function, HHNS WorkBench, 278
C Developer's Kit for Reginald, 388	CGI/Rexx, 274-276, 615
>C> in trace file,139	CGI-scripting functions, BRexx library for, 367
CALL construct, 34	CgiSetup function, HHNS WorkBench, 277
call import function, BRexx, 363	CgiWebit function, HHNS WorkBench, 278
call instruction	changestr function
definition of, 41–43, 112, 185, 537–538	definition of, 90, 550-551
error trapping with, 144–146, 152–154	mainframe Rexx, 504
example using, 70	Open Object Rexx,472
as structured construct, 34	roo!, 454
when to use, 71	character encoding stream, 96
call off instruction, 148	character folding, 97
call on instruction, 148	character map, 96
Callable service library (CSL) routines, 505	character sets, affecting portability, 203
Callback class, roo!, 455	character strings, 23. See also literals
callback function, roo!,454	character-oriented I/O, 68, 72-75, 191
callbacks, Rexx/DW, 264	CharacterVector class, roo!, 455
call- level interface (CLI), 230	charin function
camel case, 171	definition of, 72, 73, 551
capitalization, using effectively,170–171	return string for, 180, 196
caret,double (^^), instance creation,453	charout function
caret (^), method invocation prefix, 453	definition of, 73, 551
CASE construct, 34. See also select	example using, 74
instruction case sensitivity	explicitly controlling file positions, 72
automatic uppercase conversion, 186	return string for, 180, 196
capitalization, using effectively, 170–171	chars function
of Rexx language, 22-23	definition of, 73, 552
catchfinally instructions	return string for, 180, 196–197, 205
NetRexx, 521	chdir function
roo!, 454	Regina, 338, 576
c2b function, Regina, 337, 576	Reginald, 391
c2d function, 105, 553	Rexx/imc, 348, 352
cd function, Regina, 338, 576	Chill tool, r4 and roo! interpreters, 451
cell phones, 435-445	chkpwd function, CGI/Rexx, 274
center function, 89, 550	Christensen, Anders (developer of Regina), 312, 331
centre function, 550	

CFLOW tool, r4 and roo! interpreters, 451

	commands in other environments, issuing, 220–221
CICS (Customer Information Control System), 323	commands, OS
C-language interface, for RexxXML,294	affecting portability, 191–192, 201–202
C-language I/O functions	building string for, 212
BRexx, 364–365	capturing output from, 213-215, 216-218
Rexx/imc, 351, 354-356	directing input lines to, 214, 216–218
Class class, Open Object Rexx, 469, 620	environment for, 211, 216-217, 220
	environmental functions, Regina, 338
::class directive, Open Object Rexx, 470	environmental functions,
class hierarchies, Open Object Rexx, 466–467	Rexx/imc, 348, 352-354
class instruction	error trapping for, 213, 216–218
NetRexx, 521, 630	example using, 218–219, 222–225
roo!, 453	issuing, 211–212
classes	issuing, with Reginald, 393–394
NetRexx, 520	issuing, with VM Rexx, 496
Open Object Rexx, 465-467, 468-469, 476, 619-2	quotes enclosing, 181–182
roo!, 452, 455-456	result of (return code), 154, 211, 213
cleanquery function, CGI/Rexx, 274	comment delimiters (/**/), 22
clear command, Linux or Unix, 45	comments
CLI (call-level interface), 230	guidelines for, 176–177
Clist, 677-681	in roo!, 454
Clipboard class, roo!, 455	syntax for, 22, 175-176, 184
clipboard function, BRexx, 368	in VM Rexx, 494
close function	commercial Rexx interpreters, 322-323
BRexx, 365	Common Gateway Interface. See CGI Common
Regina, 339, 577	Programming Interface (CPI), 505
Rexx/imc, 351	Comparator class, roo!, 455
clreol function, BRexx,368	compare function, 90, 552
clrscr function, BRexx,367	comparison operators, 28-30, 187
cls command, Windows,45	compilers. See mainframe Rexx
CMD environment, Reginald, 393–394	definition of, 323-324
CMS assembler macros and functions, 505	VM Rexx, 498-499
CMS commands, VM Rexx, 498, 499, 506–511	compound comparisons, 30
	compound symbols (array references), 54–55
CMS functions, HHNS WorkBench, 278	compound variable name, 25
CMSFLAG function, VM Rexx, 498	compress function, Regina, 337, 577
Code Comments community, 531	concatenation, 30–31, 79–80
code pages (character sets), affecting portability, 203	concatenation operator (), 30–31, 80
code reviews, 183–184	concurrency, Open Object Rexx, 468, 489–491
collection classes, Open Object Rexx, 468, 481–485	condition function, 154, 155–156, 197, 552-3
Collier, lan (developer of Rexx/imc), 312	condition trapping. See error trapping
colon, double (::), preceding directives, 465, 470	conditions. See error conditions
colon (:), following a label, 42	Console class, roo!,455
column-position files, 86	CONSOLE interface,505
comma (,), line continuation character, 111, 122, 173,	console I/O, BRexx library for, 367
186	•
comma-delimited files, 86, 691-2	constants, 54
command identifier operator (!),454	constructs (control structures), 33, 34, 47
command line, passing parameters on, 115-6, 185	content-addressable (associative) arrays, 54, 60-62
command procedure language, Rexx as, 309	ContextVector class, roo!, 455
command procedures	control structures (constructs), 33, 34, 47
definition of, 209-210	conversational I/O, 75
example using, 222–225	conversions between numeric representations, 105-

<u>C - D</u>

convertdata function, Reginald, 399	
copies function, 90, 553	issuing SQL statements, 233, 250-1
COPYFILE command, 510	relational, 229
copyfile function	tables, creating and loading, 239–241
BRexx, 368	tables, selecting results from, 241–244, 245–247
Reginald, 391	tables, updating, 243–244
cos function	transactions, 233
BRexx, 364	datatype function, 88, 90–92, 105–106, 454, 554
Rexx/imc, 349	date function, 196,555
cosh function, BRexx, 364	date functions BRexx library for, 367 HHNS WorkBench, 278
countstr function	d2b function, Rexx/imc, 350
definition of, 90, 553 Open	Db2 database, 248–249, 250-253
Object Rexx, 472 roo!, 454	Db2 SQL interfaces, 505
Cowlishaw, Michael (Rexx inventor)	dbclose function, BRexx, 365
The Rexx Language: A Practical Approach to	dbconnect function, BRexx, 365
Programming (TRL-1), 193	DBCS (Double-Byte Character Set), 496–497
The Rexx Language (TRL-2), 8, 193, 310, 532	dberror function, BRexx, 365
role in Rexx language, 6, 308, 312	dbescstr function, BRexx, 365
CP assembler macros, 505	dbfield function, BRexx, 365
CP commands, VM Rexx, 506-511	DBForums Web site, 531
CP DIAGNOSE instructions, 505	dbget function, BRexx, 365
CP system services, 505	dbinfo function, BRexx, 365
CPI (Common Programming Interface), 505	dbisnull function, BRexx, 365
CPI Resource Recovery Routines, 505	DBMS (database management system). See database
CPICOMM interface, 505	dbsql function, BRexx, 365
crypt function, Regina, 337, 577	d2c function, 105, 556
CSL (Callable service library) routines, 505	DDL (Data Definition Language), 230
CSL function, VM Rexx, 498	debugging. See also error conditions; error trapping
CUR for Rexx, 616	interactive, 4, 6, 140-142
curses package, 111	methods of, 134
cursor processing, 245–247, 252	say instruction for, 133-135
Customer Information Control System (CICS), 323	trace function for, 139-140, 196, 197, 566-567
c2x function, 97, 105, 554	trace instruction for, 135-139, 140-142, 545-546
	decimal (fixed-point) numbers, 26
D	dedicated devices, programming. See embedded
	programming
data conversions, of variables, 24	default environment, 211, 636
Data Definition Language (DDL), 230	delay function, HHNS WorkBench,277
Data Manipulation Language (DML), 230	DeleteFile function, Reginald, 391
data structures based on arrays, 63–64	delfile function, BRexx, 368
data type, of variables, 24, 25	delquery function, CGI/Rexx, 274
database. See also Rexx/SQL package	DELSTACK command
binding variables, 247, 249–250	mainframe Rexx, 167
connections to, 233, 234-236, 248-250	OS/TSO Rexx, 502
cursor processing, 245–247, 252	delstack function, roo!, 454
information about, retrieving, 234–238	
interfaces to, 203, 250-253	

delstr function, 90, 555	
delword function, 92, 556	
dense arrays, 53	DOS functions, BRexx library for, 367, 378-382
DESBUF command	DOS platforms
CMS, 499	definition of, 8
mainframe Rexx, 166	return codes for OS commands, 154
desbuf function	double quotes ("")
BRexx, 363	enclosing character strings, 23, 26
Regina, 167, 342, 577-578	enclosing OS commands, 181–182
Reginald, 396, 398	Double-Byte Character Set (DBCS), 496-497
deweb function, CGI/Rexx, 274	DO-WHILE construct, 34
DIAG function, VM Rexx, 498	Dr. Dialog interface, 257
DIAGRC function, VM Rexx, 498	DriveContext class, roo!, 455
Dialog Editor, Reginald, 390	DriveInfo function, Reginald, 391, 401
digits function, 196, 556	DriveMap function, Reginald, 391, 401
digits special name, NetRexx, 522, 629	driver, 42
dir function	drop instruction, 115, 539
BRexx, 368	DROPBUF command
Reginald, 391	CMS, 499
directives, Open Object Rexx, 465-466, 470	mainframe Rexx, 166
Directory class, in ooRexx, 468, 619	OS/TSO Rexx, 502
directory function	dropbuf function
Regina, 338, 578	BRexx, 363
Reginald, 391	Regina, 167, 342, 578
division operator (/), 27	Reginald, 396, 399
DLLs, Reginald, 395–396	roo!, 454
DML (Data Manipulation Language), 230	DW (Dynamic Windows), GUI package based on. See
DO construct, 34	Rexx/DW package
do forever instruction, 47–49	DW package, 111
do instruction	d2x function, 105, 556
definition of, 37-38, 538	DYLD LIBRARY PATH variable, 340
example using, 38–40, 43–46	Dynamic Windows (DW), GUI package based on. See
NetRexx, 521, 630	Rexx/DW package
as structured construct, 34	
subscripts for, 181	E
do over instruction, Reginald, 396–397	E
do until instruction, 47–48	EBCDIC functions, BRexx library for, 367
do while instruction, 37, 47–48	edit macros, 665-670
document trees, 293, 294, 298	edit macros, VM Rexx, 496
documentation.	EditName function, in
See also publications	Reginald,391
for BRexx interpreter, 360-1	editors, Rexx-aware, 183
IBM Rexx manuals, 533	Emitter class, roo!, 455
for NetRexx interpreter, 517	"Empirical Comparison of Seven Programming
for r4 interpreter, 447, 449	Languages" (Prechelt), 11
for Regina interpreter, 14, 333	
• • •	
for Reginald interpreter, 386, 387, 392–393 for Rexx/imc interpreter, 346	
for roo! interpreter, 447, 449	

do-end pair, 35-36, 37-38

3
241
-247
-525
179
1-485
L
, 400-4
-414
418
-2 -52 179 31- 1

script environment, 200-201	
stack for interroutine communication, 165-166	external subroutine, 41
stack, using, 162-165	ExternalClass class, roo!, 455
telephone area code lookup, 61-62	externals function
weighted retrieval, 58-60	mainframe Rexx, 593
Exception class, roo!, 455	VM Rexx, 497
exception handling. See error trapping	
exclamation (!), command identifier, 454	F
EXE Conversion Utility, r4 and roo! interpreters, 451	1
EXEC interface, 505	>F> in trace file, 139
EXECDROP command, CMS, 499	FAILURE condition, 144, 148
EXECIO command 657-664	.false object, Open Object Rexx, 471
CMS, 499, 508, 510	fdopen function, Rexx/imc, 351
definition of, 504	FIFO (first-in, first-out) queue, 160-161
OS/TSO Rexx, 502	file associations for Windows interpreters, 326-327
EXECLOAD command, 499	File class, roo!, 455
EXECMAP command, CMS, 499	file functions
EXECs, VM Rexx, 496	BRexx library for, 367
EXECSTAT command, CMS, 499	fileno function, Rexx/imc, 351
EXECUTIL command, 502	FileRexx Function Library, 616
exists function	files
	appending to, 76
Regina, 339, 579	closing, explicit, 69, 71
roo!, 454	closing, implicit, 68
exit instruction	encryption/decryption of, Open Object Rexx, 473
definition of, 539	end-of-file (EOF) character, 73, 74
example using, 43, 46	opening, implicit, 68
NetRexx, 630	positions of, moving explicitly, 72
placement of, 113-114, 115, 186	positions of, moving implicitly, 68
as structured construct, 34	redirecting command I/O to and from, 217
exp function	filesize function, HHNS WorkBench, 277
BRexx, 364	FileSpec function, 391
Rexx/imc, 349	-
expand function,Reginald,399	FileUt package, 616
explicit concatenation, 80	finalize method, roo!,453
exponential numbers, 25–26	find function
export function, Regina, 338, 579	mainframe Rexx, 594
expose instruction, Open Object Rexx, 471, 481	Regina, 337, 580
exposed variables, 124–128	VM Rexx, 497
Extensible Markup Language (XML), 291–292. See	FINIS command, CMS, 499
also RexxXML library	first-in, first-out (FIFO) queue, 160–161
Extensible Stylesheet Language Transformations	fixed-point (decimal) numbers, 26
(XSLT), 292	floating point numbers, 26
extensions, 110, 111	flush function, BRexx, 365
external access functions, Reginald, 398	FolderContext class, roo!, 455
external data queue. See stack	fork function, Regina, 338, 580
external functions	form function, 196, 557
accessing from BRexx, 366	form special name, NetRexx, 522, 629
accessing from Regina, 339–342	FORMAT command, CMS, 510
definition of, 120	format function, 102–103, 557–558
external routines, 110	

formatdate function, CGI/Rexx, 274	
forums, 531-532	G
forward instruction, Open Object Rexx, 471	G
forward slash	Gargiulo, Gabriel (REXX in TSO Environment), 513
/ (division operator), 27	GCS (Group Control System) interface, 505
// (remainder division operator), 27	gd package, 111
free-form (free-format) languages, 7, 23	gdImageColorAllocate function, 267, 271
freespace function, Regina, 338,	gdImageCreate function, Rexx/gd, 271
580	gdImageDestroy function, Rexx/gd, 267, 271
French, Rexx forums, 532	gdImageFilledRectangle function, Rexx/gd, 267
FrmHdr function, HHNS WorkBench, 278	gdImageJpeg function, Rexx/gd, 267
FrmInp function, HHNS WorkBench, 278	gdImageLine function, Rexx/gd, 267
ftell function, Rexx/imc, 351, 356	gdImageRectangle function, Rexx/gd, 267
fullurl function, CGI/Rexx, 274	German, Rexx forums in, 532
The FUNCDEF feature, Reginald, 388	getch function, BRexx, 368
funcdef function, Reginald, 398	GetCookie function, HHNS WorkBench, 278
functions. See also call instruction; specific	getcwd function, Rexx/imc, 348, 352
functions	getenv function
arguments of, 23, 25	HHNS WorkBench, 277
bit string functions, 96-97	Regina, 338, 581
for BRexx, 363-366, 367-368	Reginald, 398
built-in functions, 110, 120	Rexx/imc, 348, 352
calling, 111–112, 184	getfullhost function, CGI/Rexx, 274
external functions, 120	getkwd function, HHNS WorkBench, 277
HHNS WorkBench, 278	GETMSG function, OS/TSO Rexx, 501
internal functions, 120	getowner function, CGI/Rexx, 274
list of, 547-571	getpid function
for mainframe Rexx, 593–595	HHNS WorkBench, 277
for Mod_Rexx, 282, 623-625	Regina, 338, 581
nesting, 111–112, 174–175	Reginald, 398
for numbers, 103-106	getspace function, Regina, 338, 581
for Open Object Rexx, 472	gettid function, Regina, 338, 582
passing parameters to, 116–117 , 128 , 185	GetTitle function, MIDI interface, 443
placement of, 113-115, 123, 177	getwparm function, HHNS WorkBench, 277
recursive, 121-123, 128-130	Gimp Toolkit, 256
for Regina, 335–339, 573–591	Glatt, Jeff (developer of Reginald), 312, 385
for Reginald, 387–392, 398–399	global variables, 127–128, 172, 178, 185
result of, 25, 111, 184-185	GLOBALV command, CMS, 499
Rexx/imc, 348-356	glue languages, 4, 9, 434
for Rexx/SQL, 233, 597-606	gmImagePng function, Rexx/gd, 267
for Rexx/Tk, 607-613	Goldberg, Gabe (The Rexx Handbook), 513
for RexxXML, 293–294	gotoxy function, BRexx, 368
for roo!, 448	Graphical Applications w/ Tcl and Tk (Johnson), 264
scope of variables in, 123-128	graphical user interface packages. See GUI packages
search order for, 120	greater than operator (>), 29
string functions, 89-90, 92-97	greater than or equal to operator (>=), 29 greater
syntax for, 23	than or less than operator (<> or ><), 29
user-defined functions, 110	
for VM Rexx, 497-498	

fuzz function, 196, 558

Group Control System (GCS) interface, 505 HTML CGI-scripting functions, BRexx library for, 367 GTK+ package, 616 HTML (Hypertext Markup Language), 292 GTK toolkit, 256, 257 htmlbot function, CGI/Rexx, 274, 276 guard instruction, Open Object Rexx, 471 htmlbreak function, CGI/Rexx, 274 GUI packages. See also Windows GUI functions HtmlGadgets package, 616 list of, 255-257 HtmlStrings package, 616 Rexx/DW package, 256-257, 264-266, 616 HTMLToolBar package, 616 Rexx/gd library, 266-271 htmltop function, CGI/Rexx,274 Rexx/Tk package, 256, 258-264, 607-613, 617 httab function, CGI/Rexx, 274 GUI trace panel, Reginald, 395 HX command, VM Rexx, 498 Hypertext Markup Language (HTML), 292 Н Hack package, 616 HackMaster, 435 IBM. history of Rexx and, 308-9 HALT condition, 144, 148 Rexx interpreters for, 321 Handheld PC Magazine, 430 IBM DB2 UDB Admin. Reference API, 252 handheld platforms. See also Android IBM DB2 UDB Appl. Development Guide, 252 BRexx support for,435-440 IBM mainframe Rexx. See mainframe Rexx definition of, 8, 10 IBM Object REXX interpreter, 257. See also Open hash function, Regina, 337, 582 Object Rexx interpreter HE command, OS/TSO Rexx,502 IBM Rexx Family Web site, 533 help. See also documentation IBM Rexx Language Web site, 533 for BRexx, 361 IDENTIFY command, CMS, 499, 508 for Reginald, 387, 390 if instruction user groups, 531 definition of, 35-37, 539 for VM Rexx, 495 example using, 23, 38-40 Web forums, 531-532 NetRexx, 630 help command, example using, 222-225 as structured construct, 34 Henri Henault & Sons Web site, 277 if-else-if ladder, 36-37 The Hessling Editor (THE), 183, 665 IF-THEN construct, 34 Hessling, Mark (current developer for Regina), 312, 331 IF-THEN-ELSE construct, 34 hexadecimal numbers, 26 implicit concatenation, 80 HHNS WorkBench, 276-281, 616 import function HI command **BRexx**, 363 OS/TSO Rexx, 502 Regina, 338, 582 VM Rexx, 498 import instruction, NetRexx, 521, 631 high-level languages, 3 IMS (Information Management System) interface, 505 HT command indentation, 172-173 **OS/TSO Rexx, 502** index function VM Rexx, 498 mainframe Rexx, 594 Regina, 337, 582-583 VM Rexx, 497 indexed strings, NetRexx, 521-522 Information Management System (IMS) interface, 505 initialize method, roo!, 453

inkey function, HHNS WorkBench, 277

InLineFile class, roo!, 455	
InOutLineFile class, roo!, 455	for IBM, 321
input	information from, 202
redirecting, 76	for Java environment, 320
standard, 68	list of, 12-13
<pre>input instructions. See parse instruction; pull</pre>	location of, as first line of script, 204
instruction	for mainframe platforms, 320
.input object, ooRexx, 470	multiple, on one computer, 325-327
input/output. See I/O	for new Rexx programmers, 13 object-
insert function, 90, 558	oriented, 314, 319-320
install scripts, 209	standardization of, 8
instance creation operator (^^), 453	thread-safe, 281-288, 333
instance methods, Open Object Rexx, 466	intr function,BRexx, 363
instantiation, Open Object Rexx, 465, 478	I/O (input/output)
InStream class, roo!, 455	BRexx functions for, 364-366, 368-369
instructions. See also specific instructions	character-oriented, 68, 72-75, 191
list of, 535-546	command I/O, controlling,216-219
multiple instructions on one line, 59	command I/O, stack for, 225-226, 342, 368-369
for NetRexx, 521, 630-633	conversational, 75
for Open Object Rexx,	definition of, 67-69
471 operands of, 25	line-oriented, 68, 69-72, 191
for OS/TSO Rexx, 501	Open Object Rexx methods for, 476-477
for Reginald, 394, 396-397, 398	OS-specific features for, 76–77
for structured constructs, 34	portability of, 76-77, 205
for unstructured constructs, 47	redirected, 75-76, 213-215
for VM Rexx, 496-497	Regina functions for, 339, 342
insufficient storage error,102	Reginald functions for, 390-392
integer division operator (%), 27	Rexx/imc functions for, 351, 354-356
integers, 26. See also	standard input, 68
numbers interactive	standard output, 68, 75
debugging, 4	interview questions, 709-720
Interactive System Productivity Facility (ISPF), 183,	iPhone, 445
505	IrDA communications, 441–442
ISPF edit macros, 665-670	ISAM package, 111
internal functions, 120. See also functions	iSH, 445
internal routines, 110	ISPEXEC interface, 505
internal subroutines, 41, 110. See also subroutines	ISPF (Interactive System Productivity Facility), 183,
international support, by Regina, 333	505,
Internet/REXX HHNS WorkBench, 276–281, 616	ISPF edit macros, 665-670
interpret instruction	ISREDIT interface, 505
definition of, 540	iterate instruction
example using, 146, 439	definition of, 47, 50, 540
Reginald, 398	NetRexx, 631
interpreted languages, 4	iterateexe function, Reginald, 399
interpreters. See also compilers; tokenizers; specific	
interpreters	J
affecting portability, 203	_
choosing, 13–14, 313–321	Java Native Interface, for roo!, 454
commercial, 322–323	Java, Rexx interpreter for. See NetRexx interpreter
for embedded programming, 321–322, 430	Java Runtime Environment (JRE), 517
free, 311-312	Java SDK (Software Development Toolkit), 517
for handheld platforms, 314, 321-322, 425	Jaxo. See Android
	JCL for batch Rexx, 671-676

Johnson, Eric F. (Graphical Applications w Tcl & Tk),	
264	explicitly controlling file positions, 72
JRE (Java Runtime Environment), 517	return string for, 180, 196
justify function	line-oriented I/O, 68, 69–72, 191
mainframe Rexx, 594	lineout function
Regina, 337, 583	closing file with, 71
Reginald, 399	definition of, 69, 559-60
Rexx/imc, 350	example using, 70
VM Rexx, 497	explicitly controlling file positions, 72
JSON, 689-694	return string for, 180, 196
	lines function
K	definition of, 69, 71, 560
	example using, 70
kbhit function, BRexx, 368	return string for, 180, 196–197, 205
key folding, 97, 106–107	linesize function
key-value pairs, 60–61, 63	mainframe Rexx, 595
Kiesel, P. (Rexx: Advanced Techniques), 513	VM Rexx,497
Kilowatt Software. See r4 interpreter; roo! interpreter	Linux platforms
_	definition of, 8
L	embedded Linux, 430
>L> in trace file, 139	tiny Linux, 430
labels. See also symbols	List class
for driver (main routine).	Open Object Rexx, 468, 619
123 for subroutine, 42–43	roo!, 455
as target of signal instruction,49–50	list (one-dimensional array), 53, 63
last-in, first-out (LIFO) stack, 160	list processing, 79, 95
lastpos function, 90, 558	LISTDSI function, OS/TSO Rexx, 501
LD LIBRARYN32 PATH variable , 340	LISTFILE command, CMS, 499, 508
LD LIBRARY PATH variable , 340	literals
leaf-node processing, 63	case sensitivity in, 22-3
Learn REXX Programming in 56,479 Easy Steps, 533	definition of, 26
leave instruction	errors in, 184
definition of, 47, 48–49, 540	quotes in, 23, 26
NetRexx, 631	ln function, Rexx/imc, 349
left function, 90, 559	load function
length function, 40, 90–92, 559	BRexx, 363
	LoadText function, Reginald, 391, 404
length NetRexx special name, 522, 629	.local object, Open Object Rexx, 470
less than operator (<), 29	local variable, roo!, 453
less than or equal to operator (<=), 29 LIBPATH variable, 340	log function, BRexx, 364
•	log10 function, BRexx,364
LIFO (last-in, first-out) stack, 160	logical AND operator (&),30
line continuation character (,), 111, 122, 173, 186	logical EXCLUSIVE OR operator (&&), 30
line separation character (;), 173 linefeed character, 74	logical NOT operator (\ or ¬), 30
•	logical operations on binary strings, 97
linein function	logical operators, 30
definition of, 69, 559	logical OR operator (), 30
example using, 70	loop instruction, NetRexx, 521, 524, 631
	loop over in roo!, 454
	loops. See do instruction

L - M

LOSTDIGITS condition, 102, 144, 148, 472, 504	
lower function	methget function, CGI/Rexx, 274
Regina, 337	Method class, Open Object Rexx, 469, 620
roo!, 454	::method directive, Open Object Rexx, 470
LU62 interface, 505	method instruction
	NetRexx, 521, 631
R.A.	roo!, 453
M	method invocation infix operator (~), 453
macOS platforms, 8	method invocation operator (~), 465,466, 470
macro language, 111, 324-325	method invocation operator (~~), 466,470
macro programming, 10	method prefix operator (^),453
MacroEd package, 616	methods
mainframe platforms	NetRexx, 520
definition of, 8	Open Object Rexx, 465, 466, 476, 619-622
interpreters for, 320	roo!, 452
stack implementation, 166-168	.methods object, Open Object Rexx, 471
emulation, 729-732	methpost function, CGI/Rexx, 274
mainframe Rexx	MIDI I/O Function Library, 616
advantages of, 320	MIDI Rexx Function Library, 387, 414-415, 616
ANSI1-1996 and, 683-687	MIDICtlName function, MIDI Rexx, 415
Clist and, 677-681	MIDICtlNum function, MIDI Rexx, 415
definition of, 493-494	MIDIEventProp function, MIDI Rexx, 415
example using, 506–511	MIDIGetEvent function, MIDI Rexx, 415
extended functions for, 593-5	MIDIGetGMDrum function, MIDI Rexx, 415
interfaces to, 504-506	MIDIGetInfo function, MIDI Rexx, 415
migrating scripts to other platforms from, 512–513	MIDIGetVMPgm function, MIDI Rexx, 415
OS/TSO Rexx, 500-503	MIDINoteName function, MIDI Rexx, 415
platforms supported by, 493	MIDINoteNum function, MIDI Rexx, 415
standards supported by, 503-504	MIDIOpenFile function, MIDI Rexx, 415
VM Rexx, 494-499	MIDIPortName function, MIDI Rexx, 415
maintenance, 5, 6	MIDISaveFile function, MIDI Rexx, 415
MAKEBUF command	MIDISetEvent function, MIDI Rexx, 415
CMS, 499	MIDISysex function, MIDI Rexx, 415
mainframe Rexx, 166	MIDITrack function, MIDI Rexx, 415
0S/TS0 Rexx, 502	migration, using Rexx for, 10
makebuf function	min function,103-4,561
BRexx, 363	minus sign (-)
Regina, 167, 342, 583	negative number prefix operator, 27
Reginald, 396, 399	subtraction operator, 27
roo!, 454	mkdir function, BRexx, 368
Map class, roo!, 455	mobile phones, 435-445. See also Android
MatchName function, Reginald, 391, 403-404, 411	platforms mod operator (remainder division operator
Math class, roo!, 455	(//), 27
mathematical applications, using Rexx for, 11	Mod Rexx interface
mathematical functions	definition of, 281-282, 616
BRexx, 364	example using, 287–288
HHNS WorkBench, 278	functions and variables in, 282, 623-627
Reginald, 387	installing, 282-283
Rexx/imc, 349	resources for, 288
max function, 103–104, 560–561	scripting with, 283–287
McPhee, Patrick T. J. (of RexxXML), 299	
MenuObject class, Open Object Rexx, 622	
Message class, Open Object Rexx, 469,620	

modularity	newstack function, roo!, 454
definition of, 7, 33, 109	.nil object, Open Object Rexx, 470
example using, 118–120	
guidelines for, 177–178	Nirmal, B. (REXX Tools and Techniques),513 NOMETHOD condition, 472
Monitor class, Open Object Rexx, 469, 620	
movefile function	nonsparse arrays (dense arrays), 53
BRexx, 368	nop instruction definition of, 37, 541
Reginald, 391	NetRexx, 632
MQ-Series Rexx interface, 505	NOSTRING condition, 472
MSG function, OS/TSO Rexx, 501	not equal operator (\= or ¬=), 29
msgbox function, BRexx, 368	not greater than operator (\> or ¬>), 29
multiple inheritance, Open Object Rexx, 467	not less than operator (\< or ¬<), 29
multiplication operator (*), 27	"not" sign, ANSI-standard, 204, 496
MutableBuffer class, ooRexx, 469	NOTREADY condition, 144, 148
MVS Forums, 532 MVS Help forum, 532	NOVALUE condition, 144, 148
MVSVAR function, OS/TSO Rexx,501	
MySQL database, 230, 249	null NetRexx special name,522,629
MySQL I/O functions, BRexx, 365–366	numbers
myurl function, CGI/Rexx, 274	calculation results identical across platforms, 27, 99
N.I.	calculation rules for, 100-101
N	conversion functions for, 105-6
NAMEFIND command, CMS, 508	definition of, 25-26, 100
nap function, roo!, 454	errors from calculations, 28, 102
Nash, Simon (developer of Object Rexx), 312	example using, 106–107
native programming, for handhelds, 435-445	exponential notation, 101–102, 103
natural language processing, 93–96	functions for, list of, 103-104
negative number prefix operator (-), 27	parsing by, 83-84
nesting functions,111–112, 174–175	significant digits (precision), 28, 101–102
NetRexx interpreter	numeric comparisons, 28
advantages of, 317, 320, 515-516	numeric digits instruction,101-102
definition of, 13, 311, 312, 515	numeric form instruction, 102
documentation for, 517	numeric fuzz instruction, 101–102
downloading and installing, 517-518	numeric instruction
example using, 523-526	
extra features in, 519-523	definition of, 28, 541
instructions, 521, 630-633	NetRexx, 632
Java knowledge required for, 516-517	
Java software required for, 517	0
running scripts, methods for, 518-9	>O> in trace file, 139
special methods, 523, 630	Object class
special names, 522-523, 629	Open Object Rexx, 469, 621
Netview, 505	roo!, 455
Netware, Rexx for, 321	Object REXX GTK+ Project, 257
new method, Open Object Rexx, 465	Object REXX interpreter, 257, 310, 460. See also Open
newline character, 74	Object Rexx interpreter
NEWSTACK command	Object Next interpreter Object CUR for Object REXX, 616
mainframe Rexx, 167	OBJECTION condition, 454
OS/TSO Rexx, 502	object-oriented interpreters, 314, 319–320. See also
	NetRexx interpreter; Open Object Rexx interpreter;
	r4 interpreter; roo! interpreter
	p,

object-oriented programming, learning, 475	
objects, Open Object Rexx, 465, 470-1	OPENVM routines, 505
ODBC API (Open Database Connectivity Application	operands, of instructions, 25
Programming Interface), 230, 232	operating system extensions, using Rexx for, 10
ODBC (Open Database Connectivity), 249	operating systems. See platforms
ODBC drivers, 387, 391, 616	operatorless condition test, 120
OLEObject class, ooRexx, 622	operators
OODialog, 257	arithmetic, 27–28
ooRexx. See Open Object Rexx interpreter	comparison, 28-30
Open Database Connectivity Application Programming	concatenation operator (), 30-31, 80
Interface (ODBC API), 230, 232	logical, 30
Open Database Connectivity (ODBC), 249	object-oriented, in Open Object Rexx,469-470
Open Database Connectivity (ODBC) drivers, 387, 391,	object-oriented, in roo!, 453-454
616	order of precedence for, 31-32
open function	options instruction
BRexx, 365	definition of, 203, 334-335, 541-542
Regina, 339, 583-584	NetRexx, 521, 632
Rexx/imc, 351, 355	portability and, 205
Open Object Rexx interpreter (ooRexx)	Reginald, 394
advantages of, 317, 319-320	VM Rexx, 496-497
built-in objects, 470-471	Oracle database, connecting to, 248
classes, 465-467, 468-469, 476, 619-622	oraenv function, CGI/Rexx, 274
definition of, 13, 310, 312, 459	order of precedence for operators, 31–32
directives, 470	OrderedVector class, roo!, 455
downloading and installing, 462-464	OS commands. See commands, OS
environmental variables for, 464 error	OS platforms, 8
conditions, 472	OS simulation interface, 505
example using, concurrency, 489-491	OS/2 platforms, 8
example using, file I/O, 476-477	OS/2 Rexx
example using, squaring a number, 477-479	functions supported by Regina, 336
example using, stack implementation, 481–485	OS/400 platforms, 8
example using, user interaction, 479–481 example	OS/TSO Rexx, 500-503
using, video circulation, 485–489 features of, 460-2	otherwise keyword, select instruction, 40-41
functions, 472	Ousterhout, John ("Scripting: Higher Level Programming
history of, 460	for the 21st Century"),11
instructions, 471	OutLineFile class, roo!,455
learning object-oriented programming with, 475	output
object-oriented features of, 464-468	redirecting, 76
operators, 469-470	standard, 68, 75
platforms supported by, 462, 472-473	output function, 73
Rexx API, 472	.output object, Open Object Rexx, 470
RexxUtil package, 472	OutStream class, roo!, 455
roo! interpreter as alternative to, 448	OUTTRAP function, OS/TSO Rexx, 501
special variables, 471	overflow error, 28, 102
Windows features, 472–473	overlay function, 90, 561
	Р
	>P> in trace file. 139
	package instruction, NetRexx, 521, 632
	package Ilialiucioli, Netherr, 521, 632

packages for Rexx, list of, 615-618. See also	
specific packages	period (.), placeholder variable, 116
parameters	persistent streams, 67-68
example using, 118-120, 128-130	Personal Rexx (Quercus Systems), 526
passing, Reginald features for, 396	PIPE command, CMS, 499
passing to script on command line, 115-116	placeholder variable (.), 116
passing to subroutines and functions, 116-117, 128,	placeholder variable (?), 247, 252
185	platforms. See also portability; specific platforms
parent classes, Open Object Rexx, 466-467	OS-specific editors, 183
parentheses (())	OS-specific I/O features, 99 retrieving
affecting order of precedence, 31-2	information from, 202
enclosing function arguments,23	supported by BRexx interpreter, 359
parse arg instruction, 115-117, 185, 195	supported by mainframe Rexx, 493
parse instruction	supported by Open Object Rexx, 462, 472-473
definition of, 26, 542	supported by r4 and roo!, 447
NetRexx, 632	supported by Regina, 14, 332
parsing by template, 82–85	supported by Reginald, 385
system information strings returned by, 635	supported by Rexx, 8-9, 309
VM Rexx, 496-497	supported by
parse linein instruction, 165	Rexx/imc, 345
parse pull instruction	PlayASong function, MIDI interface, 443
affecting stack, 160-162, 164	plus sign
reading input, 39, 75	+ (addition operator), 27
parse source instruction, 198, 352	+ (positive number prefix operator), 27
parse value instruction, Rexx/imc, 350	+++ (in trace file), 139
parse version instruction, 198–199, 352	polymorphism
PARSECMD command, CMS, 499	NetRexx, 520
parsefid function, HHNS WorkBench, 277	Open Object Rexx,
parsing, 79-80, 81-89, 701-704	467 roo!, 452
path function, Reginald, 391	Poof! tool, r4 and roo! interpreters, 451
Pattern class, roo!,455	poolid function, Regina, 584
pattern matching, 80	popen function
pattern, parsing by, 82, 83	HHNS WorkBench, 277
PatternMatch class roo!,	Regina, 338, 584
456	Reginald, 394
pclose function, Rexx/imc, 351	Rexx/imc, 351
percent sign (%), integer division operator, 27	portability. See also platforms
performance	calculation results identical across platforms, 27,
of Apache Web server,	99
281 of BRexx, 359, 360	command procedures and, 210
of database interface, 230, 247	definition of, 190
of DOS emulation, 426-427	example using, 200–201
of I/O, portability and, 76-77	factors affecting, 190-192, 202-205
of Rexx/DW, 264	I/O and, 76-77, 205
of Rexx/Tk, 256	
of scripting language, 5–6, 11	

portability (continued)	
migrating mainframe scripts to other platforms,	public methods, Open Object Rexx, 466
512-513	publications. See also documentation; standards
OS commands and, 191–192, 201–202	"An Empirical Comparison of Seven Programming
Rexx for, 10	Languages" (Prechelt), 11
RexxUtil package for, 206–207	ANSI-1996, 8
script environment and, 195-199	Embedded Systems Programming Magazine, 430
standards and, 191, 192-195	Graphical Applications w Tcl & Tk (Johnson), 264
pos function, 87, 90–92, 561	Handheld PC Magazine, 430
positive number prefix operator (+), 27	IBM DB2 UDB Administrative Reference API, 252
pow function, BRexx, 364	IBM DB2 UDB Application Development Guide, 252
pow10 function, BRexx, 364	Learn REXX Programming in 56,479 Easy Steps, 386,
Prechelt, Lutz ("An Empirical Comparison of Seven	392
Programming Languages"), 11	Pocket PC Magazine, 430
precision. See numeric	Programming Language Rexx Standard, 532
instruction prefix operators, 27	Programming with REXX Dialog, 392
preinitialize method, 453	Rexx: Advanced Techniques (Kiesel), 513
printheader function, CGI/Rexx, 274, 276	The Rexx Handbook (Goldberg), 513
printvariables function, CGI/Rexx, 274, 276	REXX in the TSO Environment (Gargiulo), 513
private methods, Open Object Rexx, 466	The Rexx Language: Practical Approach to
procedure expose instruction, 124–128, 177	Programming (TRL-1) (Cowlishaw), 193
procedure hide instruction, Rexx/imc, 350	The Rexx Language (TRL-2), 8, 193, 310, 532
procedure instruction, 124–128, 543	REXX Tools and Techniques (Nirmal), 513
PROCESS construct, 34	REXX/VM Reference, 494, 593
program maintenance, 5, 6	REXX/VM User's Guide, 511
Programming Language Rexx Standard, 532	RexxXML Usage and Reference, 299
programming style	"Scripting: Higher Level Programming for the 21st
capitalization and, 170-171	Century" (Ousterhout), 11
code reviews, 183-184	Systems Application Architecture Common
comments, 175-177	Programming Reference, 494
common coding errors, avoiding, 184–187	Tcl/Tk in a Nutshell (Raines, Tranter), 264
error handling, 179–180	TSO/E REXX Reference, 500, 593
global variables, 178	TSO/E REXX User's Guide, 511
methods of, 169-170	Using Mailslots, Reginald, 392
modularity, 177–178	Using Reginald to Access the Internet, 392
nesting, 174–175	Using Reginald w CG), 392
Rexx-aware editors, 183	Web sites listing, 531-2
site standards for, 183	The World of Scripting Languages (Barron), 11
structured code, 178-179	pull instruction
subscripts, 181	affecting stack, 160–162, 164
variable naming, 171–172	compared to parse pull instruction, 39
variables, declaring, 182	definition of, 23, 26, 81, 543
white space (spacing and indentation), 172–173	push instruction, 160–162, 163, 543
Programming with REXX Dialog, 392	putenv function, Rexx/imc, 348
PROMPT function, OS/TSO Rexx, 501	Python <> Rexx, 725-728
properties instruction, NetRexx, 521, 632	
properties, NetRexx, 520	
protect instruction, NetRexx, 521	
prototyping, using Rexx for, 10	

Q	
QBUF command	random numbers, example program using, 21–24
mainframe Rexx, 166	randu function, Regina, 338, 585
0S/TS0 Rexx, 502	rc variable, 147, 151, 197, 211, 213
QELEM command, OS/TSO Rexx, 502	read function, BRexx, 365
QSTACK command	read position, 68
mainframe Rexx, 167	readch function, Regina, 339, 585
0S/TS0 Rexx, 502	readform function, CGI/Rexx, 274, 276
qualify function	readln function, Regina,339, 585
definition of, 562	readpost function, CGI/Rexx,274
Reginald, 391	real numbers, 26
Quercus Systems, Personal Rexx, 526	real-time operating system (RTOS), 430
QUERY command, CMS, 499, 508	record-oriented files, 86
querymacro function, Reginald, 398	recursion, 121-123, 128-130
question mark (?), placeholder variable, 247, 252	redirected I/O, 75-76, 213-215
questions at end of chapter, answers for, 637-655	Regina interpreter
queue. See stack	advantages of, 332–333
Queue class	benefits of, 13-14
Open Object Rexx, 468, 620	bit manipulation functions, 336-337
roo!, 456	command I/O, stack for, 342
queue instruction, 160–162, 163–164, 543–544	definition of, 12, 312, 317-318
queued function	documentation for, 14, 333
definition of, 160, 163, 164, 562	downloading, 14–15
Reginald, 399	environmental functions, 338
quotes, double ("")	example using, 343
enclosing character strings, 23, 26	extended functions for, 335-339, 573-591
enclosing OS commands, 181–182	external function libraries, accessing, 339-342
quotes, single (''), enclosing character strings, 23, 26	extra features in, 316, 334
	for handheld platforms, 425
R	history of, 331
	installing, 15–19
r4 interpreter	international support, 333
advantages of, 316, 319, 447-448	interpreter options for, 334-5
definition of, 13, 312, 447	I/O functions, 339
documentation for, 447, 449	open source, 333
downloading and installing, 448–449	platforms supported by, 14,332
support for, 448	Rexx API support, 333
tools for, 450-451	SAA API, 343
Windows GUI functions, 448	stack functions, 342
Raines, Paul (Tcl/Tk in a Nutshell), 264	standards supported by, 332
raise instruction	string manipulation functions, 337
Open Object Rexx, 471, 472	supercompatibility with other interpreters, 333
Reginald, 395	superstacks, 333 support community for, 332
raise to a power operator (**), 27	thread-safe, 333
raiseObjection function, 454	Regina Rexx language project, 531
random function	Reginald interpreter
definition of, 23, 25, 103-104, 562	Administration tool, 387, 399, 615
Reginald, 399	advantages of, 316, 318, 385–386

Reginald interpreter (continued) array indexing, 397 ::requires directive, Open Object Rexx, 470 definition of, 13, 312, 385 resources. See also publications; Web sites do over instruction, 396-397 standards for Rexx, 8, 191, 192-195, 532 documentation for, 386, 387, 392-393 user groups, 531 downloading and installing, 386 Web forums, 531-532 error conditions, defining and raising, 395 response handlers, 284 example using, file and drive management, 400-404 REstructured eXtended eXecutor. See Rexx language example using, MIDI files, 414-415 result variable example using, speech recognition, 412-414 definition of, 41, 110, 111, 151, 197 example using, Windows GUI, 404-412 example using, 112-113 example using, Windows registry, 416-418 signal instruction and, 152 extended functions, 387-388 return code. See rc variable external access functions, 398 return instruction GUI trace panel, 395 definition of, 41, 43, 110, 115, 544 interpret instruction, 398 nesting, 111-112 I/O functions, 390-392 NetRexx, 632 MIDI Rexx function library, 387, 414-415, 616 placement of, 186 miscellaneous functions, 399 signal instruction and, 152 ODBC drivers, 391 as structured construct, 34 options instruction, 394 reverse function, 90, 123, 562 OS commands, issuing, 393-394 Revu tool, r4 and roo! interpreters, 451 parameter passing, 396 REXREF3 package, 616 platforms supported by, 385 **REXX. See mainframe Rexx** REXX Dialog, 387, 388-390, 404-409 Rexx 2 Exe utility, 387, 616 REXX Dialog IDE, 390, 400 Rexx: Advanced Techniques... (Kiesel), 513 Rexx Text Editor (RexxEd), 183, 398, 399 Rexx API, 324, 333, 472 Script Launcher, 399, 618 REXX Dialog IDE (RxDlgIDE), 390, 400 scripting with, 399-400 Rexx Dialog package, 257, 616 sorting array items, 396 REXX Dialog, Reginald, 387, 388-390, 404-409 speech function library, 412-4 Rexx Exits interface, 505 SQLite driver, 387, 392 Rexx for CICS, 320 The Rexx Handbook (Goldberg), 513 stack functions, 396, 398-399 Rexx home page, 532 standards supported by, 386 REXX in the TSO Environment (Gargiulo), 513 system information functions, 398 Rexx interpreters. See interpreters tools for, 386-387 Rexx LA (Rexx Language Association), 460, 531 Windows DLLs, 395-396 Windows GUI functions (REXX Dialog), 388-90, 404-12 Windows registry, accessing, 395, 416-418 Reginald Rexx Forum, 532 regular expressions library, Reginald, 388 Regular Expressions package, 616 RegUtil package, 617 Relation class, Open Object Rexx, 468, 620 relational database, 229. See also database remainder division operator (//), 27 reply instruction, Open Object Rexx, 471

request record pointer, 286

Rexx language	Rexx/ISAM package, 617
benefits of, 6-7	Rexxlets, 434
elements of, 24-26	RexxMail package, 617
features of, 7–8	RexxRE package, 617
free implementations of, 310, 311-312	rexxSMLFini function, RexxXML, 294
future of, 327	Rexx/SQL package
history of, 6, 189-190, 192-193, 308-311	alternatives to, 250-253
interpreter for, choosing, 13-14, 313-321	binding variables, 247, 249–250
limitations of, 11	cursor processing, 245–247
packages and tools supported by, 615-618	
platforms supported by, 8-9, 309	database connections, 233, 234-236, 248-250
standards for, 8	databases supported by, 229–230, 248–250
uses of, 9-11, 12	definition of, 111, 617
The Rexx Language: A Practical Approach to	downloading, 231–232
Programming (TRL-1) (Cowlishaw), 193	environmental control, 233
Rexx Language Association (Rexx LA), 460	environmental functions, 233
The Rexx Language (TRL-2) 8, 193, 310, 532	error trapping in, 237–239
Rexx Math Bumper Pack, 616	features of, 230
Rexx newsgroup forum, 531	functions in, list of, 233, 597-606
Rexx Server Pages (RSPs), 287–288	installing, 232
Rexx Sockets, 505	issuing SQL statements, 233, 250
Rexx Speech library, 412–414	tables, creating and loading, 239-241
Rexx Text Editor (RexxEd), 183, 387, 399, 617	tables, selecting results from, 241–244, 245–247
REXX Tools and Techniques (Nirmal), 513	tables, updating, 243–244
Rexx2Nrx package, 617	transactions, 233
Rexx-aware editors, 183	RexxTags package,617
Rexx/CGI library (cgi-lib.rxx), 274-276, 615	Rexx/Tk package
Rexx/CURL package, 616	definition of, 256, 258, 617
Rexx/Curses package, 616	downloading and installing, 258–259
Rexx/DB2 package, 250–253	example using, 260–264
Rexx/DW package, 256–257, 264–266, 616	functions in, list of, 607-613
RexxEd (Rexx Text Editor), 183, 387, 399, 617	resources for, 264
* * * * * * * * * * * * * * * * * * * *	scripting with, 259, 264
Rexx/gd library, 266–271, 617	Rexx/Trans package, 617
Rexx/imc interpreter	RexxUtil package, 206-207, 387, 472, 617
advantages of, 316, 318, 345–346	REXX/VM Reference, 494,593
C-language I/O functions, 351, 354–356	REXX/VM User's Guide, 511
definition of, 12, 312, 345	Rexx/Wrapper package, 617
documentation for, 346	RexxXML library
environmental functions, 348, 352-354	applying stylesheet to document, 299
example using, 352–356	definition of, 111, 292, 617
extra features in, 348-	downloading and installing, 295
351 installing, 346–348	example using, 299–302
miscellaneous functions, 350	features of, 292
packages and tools supported by, 351–352	functions for, list of, 293-294
platforms supported by, 345	licensing, 295
SAA interface functions, 350	loading, 296
stack functions, 350	processing XML documents, 296-297, 298 updating
standards supported by, 345	XML documents, 297
transcendental mathematical functions, 349	validating documents against schemas, 298
	PovyVMI Upage and Peferance 200

<u>R - S</u>

rexxXMLInit function, RexxXML, 294	C function
right function,90,122,563	rxfuncquery function Regina, 586-587
rmdir function, BRexx, 368	
roo! interpreter	Reginald, 398
advantages of, 317, 319, 447-448	SAA, 341, 350
definition of, 13, 310, 312, 447	RxInfo function, REXX Dialog,389
documentation for, 447, 449	rxJava package, 617
downloading and installing, 448–449	RxMakeShortcut function, REXX Dialog, 389
object-oriented programming with, 452–456	RxMsg function, REXX Dialog, 389, 408
support for, 448	RxProject package, 618
tools for, 450–451	RxQuery function, REXX Dialog, 389
Windows GUI functions, 448	rxqueue executable, Regina, 342
::routine directive, ooRexx, 470	rxqueue function
routines. See functions; subroutines	Regina, 168, 338, 342, 587
.rs object, Open Object Rexx, 471	Reginald, 396, 399
r4Sh function, HHNS WorkBench, 278	RxRSync package, 618
RSPs (Rexx Server Pages), 287–288	RxRunRamScript function, REXX Dialog,389
RT command	RxRunScript function, REXX Dialog, 389
OS/TSO Rexx, 502	RxSay function, REXX Dialog, 408
VM Rexx, 498	RxSet function, REXX Dialog,389
RTOS (real-time operating system), 430	RxSock package, 111, 388, 618
RxAcc package, 617	rxstack executable, Regina,342
RxBlowFish package, 617	RxWav package, 618
RxCalibur package, 617	
RxComm Serial Add-on package, 388, 617	S
RxCreate function, REXX Dialog, 389, 407	•
RXDDE package, 617	SAA API
RxDlgDropFuncs function, REXX Dialog, 389	definition of, 324
RxDIgIDE package, 617	Regina, 336, 343
RxDlgIDE (REXX Dialog IDE), 390, 400	Reginald, 386
RxDlgLoadFuncs function, REXX Dialog, 389	Rexy/imc, 350
RXETT function, REXX Dialog, 389, 407	SAA (Systems Application Architecture) standard, 193,
RxFile function, REXX Dialog, 389	309, 532
rxfuncadd function	say instruction
Regina, 585-586	debugging with, 133–135
Reginald, 398	default environment, determining, 636
REXX Dialog, 389	definition of, 45, 75, 544
Rexx/DW, 265	NetRexx, 633
Rexx/gd, 267	system information strings returned by, 635
Rexx/Tk, 261	sayn instruction, Rexx/imc, 350
SAA, 341, 350	scheduled tasks, 210
rxfuncdrop function	schema validation, with RexxXML, 294, 298
Regina, 586	scoping, 123–130
Reginald, 398	screen interfaces, affecting portability, 203
SAA, 341, 350	Script Launcher, 399, 618
rxfuncerrmsg function	"Scripting: Higher Level Programming for the 21st Cen
Regina, 586	tury" (Ousterhout), 11
Reginald, 398	scripting language, 311-315
SAA, 341	definition of, 3–4
•	performance of, 5-6, 11
	Rexx as, 308

SearchPath function, Reginald, 391	alaan function
seek function	sleep function
BRexx, 365	Regina, 338, 588 Reginald, 399
Regina, 339, 587	smart phones See Android
select instruction	Socket class, roo!, 456
as CASE construct, 34, 37	SOCKET function, VM Rexx, 498
definition of, 40-41, 544-545	SORT command, CMS, 510
example using, 43-46	Sort statement, Reginald, 396
NetRexx, 521, 633	source special name, NetRexx, 522, 629
Rexx/imc, 350	
self reference, roo!, 453	sourceline function, 150, 153, 196, 197, 563
self variable, Open Object Rexx, 471	space function, 92, 563–564
semicolon (;), line separation character, 59, 173	spacing and indentation, 172–173
SENTRIES command, CMS, 499	sparse arrays, 53
Set class	special characters, I/O and, 74–75
Open Object Rexx, 468, 620	special methods, NetRexx, 523, 630
roo!, 456	special names, NetRexx, 522–523, 629
SET command, CMS, 499	special variables
SETLANG function, OS/TSO Rexx, 501	for Mod_Rexx, 626-627
SHARE users group, 531	for Open Object Rexx,471
shared variable, roo!, 453	rc variable, 147, 151, 197, 211, 213
shell language scripts, running Rexx as, 326	result variable, 41, 151, 197
shell scripts. See command procedures	sigl variable, 151, 197 Speech Function Library, 387, 412–414, 618
SHLIB_PATH variable, 340	SpeechClose function, Rexx Speech, 414
show function, Regina, 338, 587–588	SpeechOpen function, Rexx Speech, 413
sigl variable, 151, 197	SpeechPitch function, Rexx Speech, 413
sign function, 103–104, 563	SpeechSpeak function, Rexx Speech, 413
signal instruction	SpeechSpeed function, Rexx Speech, 414
compared to call instruction, 152-154	Speech, 414 Speech, 414
definition of, 47, 49-50, 545	SpeechVolume function, Rexx Speech, 414
error trapping with, 144-146, 147-148	split function, roo!, 454
mainframe Rexx, 504	- · · · · · · · · · · · · · · · · · · ·
NetRexx, 633	SQL Communications Area (SQLCA), 230, 238 SQL
signal off instruction, 148	statements. See also Rexx/SQL package
signal on instruction, 148	binding variables, 247, 249–250
signatures, NetRexx, 520	issuing, 233, 250, 251
significant digits. See numeric instruction	support for, 230
simple symbols (variable names), 25, 54, 171-2	tables, creating and loading, 239–241
simple variable name, 25	tables, selecting results from, 241–244, 245–247 tables, updating, 243–244
sin function	7 . 3
BRexx, 364	SQLCA (SQL Communications Area), 230, 238 SqlClose function, Rexx/SQL, 233, 245, 597
Rexx/imc, 349	
single board computers, 421-433	SqlCommand function, Rexx/SQL, 233, 597–598
single quotes (''), enclosing character strings, 23, 26	SqlCommit function, Rexx/SQL, 233, 598
sinh function, BRexx, 364	SqlConnect function, Rexx/SQL, 233, 598–599
skewed tree, 63	SqlDefault function, Rexx/SQL, 233, 599
SLAC (Stanford Linear Accelerator Laboratory), 274	SqlDescribe function, Rexx/SQL, 233, 245, 599–600
slacfnok function, CGI/Rexx, 275	SqlDisconnect function, Rexx/SQL, 233, 600
slash	SqlDispose function, Rexx/SQL, 233, 601
/ (division operator), 27	SqlDropFuncs function, Rexx/SQL, 601
// (remainder division operator), 27	

SqlExecute function, Rexx/SQL, 233, 601	
SqlFetch function, Rexx/SQL, 233, 245, 602	Stem class, Open Object Rexx, 469, 621
SqlGetData function, Rexx/SQL, 233, 602-603	stem variables (array names), 55
SqlGetInfo function, Rexx/SQL, 233, 603	stemdelete function, Reginald, 399
SQLite driver, Reginald, 387, 392,	steminsert function, Reginald, 399
SQLite for BRexx, 371-373	storage function
SglLoadFuncs function, Rexx/SQL, 603–604	BRexx, 363
SqlOpen function, Rexx/SQL, 233, 245, 604	OS/TSO Rexx, 501
	Regina, 338, 589
SqlPrepare function, Rexx/SQL, 233, 245, 604	VM Rexx, 498
SqlRollback function, Rexx/SQL, 233, 605	Stream class, Open Object Rexx, 469, 621
SqlVariable function, Rexx/SQL, 233, 605–606	stream function
sqrt function	BRexx, 365
BRexx, 364	definition of, 71-72, 196, 564
Rexx/imc, 349	portability and, 205
squareRoot function, roo!, 454	Regina, 339, 589
S/Rexx (Treehouse Software Inc.), 323	Rexx/imc, 351
stack	·
affecting portability, 205	VM Rexx, 497
BRexx functions for, 363	stream instance, 477 streams, I/O, 67–68, 216, 217
buffers and, 167-168	
for command I/0, 225-226, 342	strict comparison operators, 29–30, 187
definition of, 159-162	strictly equal operator (==), 29
example using, 162–166	strictly greater than operator (>), 29
instructions affecting, 160	strictly greater than or equal to operator (>=), 29
maximum size of, 162 multiple,	strictly less than operator (<<), 29
in Reginald, 396 number of	strictly less than or equal to operator (<<=),29
items in, 160	strictly not equal operator (\== or ¬==), 29
object-oriented, in Open Object Rexx, 481-5	strictly not greater than operator (\> or ¬>),
portability of, 166-168	29
Regina functions for, 342	strictly not less than operator (\<< or ¬<<),
Reginald functions for, 396, 398-	29
399 Rexx/imc functions for, 350	String class, Open Object Rexx, 469, 621
superstacks, in Regina, 333	string comparisons,28
Stack class, 456	string delimiters, 26
standard input, 68	string manipulation, 79–80, 337
standard output, 68, 75	string processing, 79
standards	strings
history of, 192-195	bit string functions, 96-97
list of, 8, 532	concatenating, 79–80
for mainframe Rexx, 503–504	example using, 85–89, 93-96
portability and, 191, 195	functions for, list of, 89-90
Standord Linear Accelerator Laboratory (SLAC), 274	in literals, 23
state function	parsing, 79–80, 81–85
Regina, 338, 588	word-oriented functions for, 92–96
Reginald, 391	strip function, 87–88, 90, 564
statements. See instructions	striphtml function, CGI/Rexx, 275
static variable, roo!, 453	structured programming, 7, 33–34, 178–179
.stderr object, Open Object Rexx, 471	study question answers, 637-655
	style. See programming style
. stdin object, Open Object Rexx, 471	stylesheets. See XSLT (Extensible Stylesheet Language
.stdout object, Open Object Rexx, 471	Transformations)
	subclasses, Open Object Rexx, 466-467

SUBCOM command, OS/TSO Rexx, 502	
subroutines. See also call instruction	T
calling, 112	1
definition of, 41	Table class
error handling using, 144-146	Open Object Rexx, 468, 620
example using, 43–46	roo!, 456
label for, 42-43	tables (arrays). See arrays
passing parameters to, 116-117, 128, 185	tables (database)
placement of, 113-115, 123, 177	creating and loading, 239–241
recursive, 121-123	selecting results from, 241-244, 245-247
result of, 112-113	updating, 243-244
scope of variables in, 123-128	Tags function, HHNS WorkBench,278
types of, 41	tail of compound symbol, 55
subscripts, 181	Talkabout Network, 531
substr function, 88–89, 90, 565	tan function
subtraction operator (-), 27	BRexx, 364
subword function, 93, 565	Rexx/imc, 349
super special method, NetRexx, 523, 630	tanh function, BRexx, 364
super special name, NetRexx, 522, 629	TblHdr function, HHNS WorkBench, 278
super variable, Open Object Rexx, 471	Tcl Developer Exchange Web site, 258
superclasses, Open Object Rexx, 466–467	Tcl/Tk in a Nutshell (Raines, Tranter), 264
superstacks, Regina support for, 333	Tcl/Tk scripting language, GUI package using. See
Supplier class, Open Object Rexx, 469, 621	Rexx/Tk package
suspect function, CGI/Rexx, 275	TE command
symbol function, 112, 565	OS/TSO Rexx, 502
symbolic pointers, 63 symbols.	VM Rexx, 498
See also labels	Tek-Tips Rexx Forum, 532
compound (array names), 54–55	template, parsing by, 82-85
simple (variable names), 25, 54	testing. See debugging
SYNTAX condition, 144, 148	text processing, 10. See also string manipulation
SYSCPUS function, OS/TSO Rexx,501	strings
SYSDSN function, OS/TSO Rexx,501	textual analysis, 93–96
System class, roo!, 456	THE (The Hessling Editor), 183, 618
system function, Rexx/imc, 348, 352	this special method, NetRexx, 523, 630
system functions	this special name, NetRexx, 523, 629
BRexx, 363	thread-safe interpreter, 281-288, 333
Reginald, 398	tilde, double (~~), method invocation, 466-70
Rexx/imc, 348, 352	tilde (~), method invocation, 453, 465-6, 470
system information strings, 635	time function
SystemPropertyMap class, roo!, 456	definition of, 196, 566
systems administration, using Rexx for, 10	mainframe Rexx, 504
Systems Application Architecture Common	tiny Linux, 430
Programming Reference, 494	Tk, GUI package using. See Rexx/Tk package TK
Systems Application Architecture (SAA) standard,	package, 111
193, 309, 532	TkActivate function, Rexx/Tk, 607
systems programming languages, 11	TkAdd function, Rexx/Tk, 262–263, 607
SYSVAR function, OS/TSO Rexx, 501	13134 1011011011, 110701111, 122 120 , 001
DIDVAN INICHOLI, OO/100 NGAA, OU I	

TkAfter function. Rexx/Tk. 607 TkText function, Rexx/Tk, 610 TkBbox function, Rexx/Tk, 607 TkButton function, Rexx/Tk, 607 TkTextTagBind function, Rexx/Tk, 611 TkTextTagConfig function, Rexx/Tk, 611 TkCanvas functions, Rexx/Tk, 607-608 TkTopLevel function, Rexx/Tk, 611 TkCget function, Rexx/Tk, 608 TkCheckButton function, Rexx/Tk,608 TkTree functions, Rexx/Tk, 611-612 TkChooseColor function, Rexx/Tk,608 TkVar function, Rexx/Tk, 611 TkVariable function, Rexx/Tk, 611 TkChooseDirectory function, Rexx/Tk, 608 TkWait function, Rexx/Tk, 611 TkCombobox functions, Rexx/Tk, 612 TkWinfo function, Rexx/Tk, 611 TkConfig function, Rexx/Tk, 608 TkWm function, Rexx/Tk, 611 TkCurSelection function, Rexx/Tk, 608 TkXView function, Rexx/Tk, 611 TkDelete function, Rexx/Tk, 608 TkyView function, Rexx/Tk, 611 TkDestroy function, Rexx/Tk, 608 tokenized scripts, Open Object Rexx, 473 TkDropFuncs function, Rexx/Tk, 263, 611 tokenizers, 324 TkEntry function, Rexx/Tk, 608 tools, list of, 615-618 TkError function, Rexx/Tk, 258, 608 TopHat tools, r4 and roo! interpreters, 451 TkEvent function, Rexx/Tk, 608 topower function, Rexx/imc, 349 TkFocus function, Rexx/Tk, 608 trace function, 139-140, 196, 197, 566-567 TkFont functions, Rexx/Tk, 608-609 trace instruction TkFrame function, Rexx/Tk, 609 definition of, 135-139, 140-142, 545-546 TkGet function, Rexx/Tk, 609 NetRexx, 521, 633 TkGetOpenFile function, Rexx/Tk, 263, 609 trace panel, Reginald, 395 TkGetSaveFile function, Rexx/Tk, 609 trace special name, NetRexx, 523, 629 TkGrab function, Rexx/Tk, 609 trailing comments, 22 TkGrid functions, Rexx/Tk, 609 transactions, Rexx/SQL, 233 transcendental TkImageBitmap function, Rexx/Tk, 609 mathematical functions. See TkImagePhoto function, Rexx/Tk, 609 mathematical functions TkIndex function, Rexx/Tk, 609 transient streams, 67 TkInsert function, Rexx/Tk, 609 translate function, 90-92, 95, 567 TkItemConfig function, Rexx/Tk, 609 Tranter, Jeff (Tcl/Tk in a Nutshell), 264 TkLabel function, Rexx/Tk, 609 TkListbox function, Rexx/Tk, 609 Tree class, roo!, 456 Treehouse Soft. S/Rexx, 323, 63-4 TkLoadFuncs function, Rexx/Tk, 261, 611 trim function, Regina, 337, 589 TkLower function, Rexx/Tk, 610 TRL-1 standard, 193 TkMCListbox functions, Rexx/Tk, 612-613 TRL-1 (The Rexx Language: A Practical Approach to TkMenu functions, Rexx/Tk, 610 Programming) (Cowlishaw), 193 TkMessageBox function, Rexx/Tk, 263, 610 TRL-2 standard, 193–195 TkNearest function, Rexx/Tk, 610 TRL-2 (The Rexx Language), 8, 193, 310, 532 TkPack function, Rexx/Tk, 610 .true object, Open Object Rexx, 471 TkPopup function, Rexx/Tk, 610 TkRadioButton function, Rexx/Tk.610 trunc function, 103-104, 567-568 TS command TkRaise function, Rexx/Tk, 610 **OS/TSO Rexx, 502** TkScale function, Rexx/Tk, 610 VM Rexx, 498 TkScan function, Rexx/Tk, 610 TSO/E Rexx, 500-503 TkScrollbar function, Rexx/Tk, 610 TkSee function, Rexx/Tk, 610 TSO/E REXX Reference, 500,593 TkSelection function, Rexx/Tk, 610 TSO/E REXX User's Guide, 511 TkSet function, Rexx/Tk, 610 typeless variables, 4, 25 TkSetFileType function, Rexx/Tk,610

TkTcl function, Rexx/Tk, 610

U	ValueOut function, Reginald, 391
u2a function, BRexx, 368	vardump function, BRexx, 363 variable management, 4
uname function Regina, 338, 590 Reginald, 398	variable names (simple symbols), 25, 54, 171–172 variables
unbalanced tree, 63	assigning, 25, 26
underflow error, 28, 102	binding, for SQL, 247, 249–250
underscore (), in variable names, 171	data type of, 23, 25
Unicode support, Open Object Rexx, 473	declaration of, 23, 25, 172, 182
Uniform Resource Identifier (URI), 436	definition of, 25
uninitialized variables, 26	exposed, 124-128
uni-Rexx (The Workstation Group), 275, 323	global, 127–128
	placeholder variable (.),116
universal languages, 8–9 Unix platforms, 8	scope of, 123-128
	typeless, 4, 25
unixerror function	uninitialized, 26
Regina, 338, 590	uninitializing, 115
Reginald, 398	variables (attributes), Open Object Rexx, 465
unstructured programming, 47–50, 179	vector class reference operator ({}), 454
upper camel case, 171	Vector class, roo!, 456
upper function	verify function, 88, 90-92, 568
Regina, 337, 590–591	version special name, NetRexx, 523, 629
roo!, 454	vertical applications, r4 and roo! interpreters, 451
upper instruction, VM Rexx, 496-7	vertical bar, double (), concatenation operator,
uppercase. See case sensitivity	30–31, 80
URI (Uniform Resource Identifier), 436	vertical bar (), logical OR operator, 30
URLs, retrieving data from, with RexxXML, 294	VisPro Rexx interface, 257
Use Arg function, Reginald, 396	Vlachoudis, Vasilis (inventor of BRexx), 312, 359
use arg instruction, ooRexx, 466	VM GUI interface, 505
use instruction, ooRexx, 471	VM platforms, 8
USER condition, 472	VM Rexx
user groups, 531	ANSI-standard "not" sign,496
user-defined functions, 110	CMS commands, 499
userid function	CMS immediate commands, 498
mainframe Rexx, 595	comment on first line of script,494
Regina, 338, 591	compilers, 498-499
Reginald, 398	enabling buffer functions for,573
Rexx/imc, 348, 352	file types, 496
VM Rexx, 497	functions, 497-498
Using Mailslots with Reginald, 392	instructions, 496-497
Using Reginald to Access the Internet, 392	online help, 495
Using Reginald with a Common Gateway Interface	OS commands, 496
(CGI), 392	VSAMIO interface, 505
	VSE platforms, 8
V	VSE simulation interface, 505
•	VX*Rexx interface, 257
>V> in trace file, 138, 139	
value function	W
definition of, 568	• •
Reginald, 395, 416-418	W32 Funcs package, 618

WAVV Forum, 532

ValueIn function, Reginald, 391

Web forums, 531-532	
Web servers, programming	webify function, CGI/Rexx,275
Apache Web server, 281–288	Wegina package, 618
with CGI, 273-281	wherex function, BRexx,368
methods for, 273	wherey function, BRexx,368
Web sites	white space, 23, 172-173
Amiga Forum, 532	whole numbers (integers),26
AROS, 323	WideCharacterVector class, roo!, 456
Bochs emulator, 424	widgets, Rexx/DW, 256, 264
BRexx interpreter, 360-361	WindowObject class, Open Object Rexx, 622
Code Comments community,531	Windows CE platforms.
DBForums, 531	BRexx functions for, 363-364
embedded programming, 430	Windows DLLs, Reginald, 395-396
handheld devices, 430	Windows GUI functions. See also GUI packages
Henri Henault & Sons Web site, 277	r4 and roo! interpreters, 448
IBM DeveloperWorks, 288	Reginald, 388-390, 404-412
IBM Rexx Family, 533 IBM	Windows Internet API, Reginald, 388
Rexx Language, 533 IBM	Windows platforms
Rexx manuals, 533	definition of, 8
Mod_Rexx interface, 282, 288	installing Regina interpreter on, 15-16
MVS Forums, 532 MVS	I/O redirection on, 76
Help forum, 532	multiple interpreters running on, 326-327
NetRexx interpreter, 517	Open Object Rexx classes for, 621-622
Open Object Rexx interpreter, 460, 462	Open Object Rexx support for, 472-473
PocketConsole emulator, 424	Reginald support for, 385-386
Quercus Systems, 323	return codes for OS commands, 154
r4 interpreter, 448	Windows registry, accessing with Reginald, 395, 416-8
Regina interpreter, 14	WindowsClipBoard class, ooRexx, 622
Regina Rexx language project, 531	WindowsEventLog class, ooRexx, 622
Reginald interpreter, 386	WindowsManager class, ooRexx, 622
Reginald Rexx Forum, 532	WindowsProgramManager class, ooRexx, 621
Rexx home page, 532	WindowsRegistry class, ooRexx, 621
Rexx LA, 531	windowtitle function, BRexx, 368
Rexx/DW package, 257, 265	word function, 93, 569
Rexx/gd library, 267	wordindex function, 93, 569
Rexx/imc interpreter, 346, 352	wordlength function, 93, 95, 569
Rexx/Tk package, 256, 258	word-oriented functions, 92–96
roo! interpreter, 448	wordpos function,93, 95, 569
SHARE users group,531	words
SLAC (Stanford Linear Accelerator Laboratory), 274	definition of, 92
SQLite, 392	parsing by, 82–83
Talkabout Network, 531	words function, 93, 95, 570
Tek-Tips Rexx Forum, 532	The Workstation Group, uni-Rexx, 326
Treehouse Software Inc.,	•••
323 WAVV Forum, 532	The World of Scripting Languages (Barron), 11
The Workstation Group, 323	wraplines function, CGI/Rexx, 275
X-Master, 435	write function, BRexx, 365
	write position, 68

XTM emulator, 428

writech function, Regina, 339, 591 writeln function, Regina, 339, 591 WWWAddCookie function, Mod Rexx, 623 WWWARGS special variable, Mod Rexx, 626 WWWAUTH TYPE special variable, Mod_Rexx, 626 WWWCnxRecAborted function, Mod_Rexx, 625 WWWConstruct URL function, Mod_Rexx, 623 WWWCONTENT LENGTH special variable, Mod Rexx, 626 WWWCONTENT TYPE special variable, Mod Rexx, 626 WWWCOOKIES special variable, Mod_Rexx, 626 WWWDEFAULT TYPE special variable, Mod_Rexx, 626 WWWEscape Path function, Mod Rexx, 623 WWWFILENAME special variable, Mod Rexx, 626 WWWFNAMETEMPLATE special variable, Mod Rexx, 626 WWWGATEWAY INTERFACE special variable, 626 WWWGetArgs function, Mod Rexx, 286, 623 WWWGetCookies function, Mod_Rexx, 623 WWWGetVersion function, Mod_Rexx, 286, 623 WWWHOSTNAME special variable, Mod_Rexx, 626 WWWHTTP time function, Mod_Rexx, 623 WWWHTTP USER ACCEPT special variable, 626 WWWHTTP USER AGENT special variable, 626 WWWInternal_Redirect function, Mod_Rexx, 623 WWWIS MAIN REQUEST special variable, 626 WWWLogError function, Mod_Rexx, 623 WWWLogInfo function, Mod_Rexx, 623 WWWLogWarning function, Mod_Rexx, 624 WWWPATH INFO special variable, Mod_Rexx, 626 WWWPATH TRANSLATED special variable, 626 WWWPOST STRING special variable, Mod Rexx, 626 WWWQUERY STRING special variable, Mod Rexx, 627 WWWREMOTE ADDR special variable, Mod_Rexx, 627 WWWREMOTE HOST special variable, Mod_Rexx, 627 WWWREMOTE IDENT special variable, Mod_Rexx, 627 WWWREMOTE USER special variable, Mod_Rexx, 627 WWWReqRec functions, Mod_Rexx, 624-625 www.request method special variable, Mod_Rexx, 627 www.rspcompiler special variable, Mod_Rexx, 627 WWWRun_Sub_Req function, Mod_Rexx, 624 WWWSCRIPT NAME special variable, Mod Rexx, 627 WWWSendHTTPHeader function, Mod Rexx, 286, 624 WWWSERVER NAME special variable, Mod_Rexx, 627 WWWSERVER PORT special variable, Mod_Rexx, 627

WWWSERVER_PROTOCOL special variable, 627

WWWSERVER_ROOT special variable, Mod_Rexx, 627

WWWSERVER_SOFTWARE special variable, 627

WWWSetHeaderValue function, Mod_Rexx, 624

WWWSrvRec functions, Mod_Rexx, 625

WWWSub_Req_Lookup_File function, 624

WWWSub_Req_Lookup_URI function, Mod_Rexx, 624

WWWUNPARSEDURI special variable, Mod_Rexx, 627

WWWURI special variable, Mod_Rexx, 627



x2b function, 97, 105, 570 x2c function, 105, 570–571 x2d function, 105, 571 XEDIT command, CMS,499 XEDIT editor, 183, 505 XEDIT macros, VM Rexx, 496 X- Master, 435

XML (Extensible Markup Language), 291–292. See also RexxXML library

xmlAddAttribute function, RexxXML, 293, 297 xmlAddComment function, RexxXML, 293, 297 xmlAddElement function, RexxXML, 293, 297 xmlAddNode function, RexxXML, 293, 297 xmlAddPI function, RexxXML, 293, 297 xmlAddText function, RexxXML, 293, 297 xmlApplyStylesheet function, RexxXML,294, 299 xmlCompileExpression function, RexxXML, 294 xmlCopyNode function, RexxXML, 293, 297 xmlDropFuncs function, RexxXML, 293 xmlDumpSchema function, RexxXML, 294, 298 xmlError function, RexxXML, 293, 298, 301 xmlEvalExpression function, RexxXML, 294, 302 xmlExpandNode function, RexxXML, 293, 297 xmlFindNode function, RexxXML, 294, 298, 302 xmlFree function, RexxXML, 293 xmlFreeContext function, RexxXML, 294 xmlFreeDoc function, RexxXML, 293, 296 xmlFreeExpression function, RexxXML, 294 xmlFreeSchema function, RexxXML, 294, 298 xmlFreeStylesheet function, RexxXML,294, 299 XMLGenie! tool, r4 and roo! interpreters, 451 xmlGet function, RexxXML, 294 xmlLoadFuncs function, RexxXML, 293, 296 xmlNewContext function, RexxXML, 294 xmlNewDoc function, RexxXML, 293

xmlNewHTML function, RexxXML, 293
xmlNodeContent function, RexxXML, 293
xmlNodesetAdd function, RexxXML, 294
xmlNodesetCount function, RexxXML, 294
xmlNodesetItem function, RexxXML, 294, 298
xmlOutputMethod function, RexxXML, 294, 299
xmlParseHTML function, RexxXML, 293, 301
xmlParseSchema function, RexxXML, 294, 298
xmlParseXML function, RexxXML, 293, 296, 298
xmlParseXSLT function, RexxXML, 294, 299
xmlPost function, RexxXML, 294
xmlRemoveAttribute function, RexxXML, 293, 297

xmlRemoveContent function, RexxXML, 293, 297
xmlRemoveNode function, RexxXML, 293, 297
xmlSaveDoc function, RexxXML, 293, 296
xmlSetContext function, RexxXML, 294
xmlValidateDoc function, RexxXML, 294, 298
xmlVersion function, RexxXML, 293, 301
XML and JSON, 689
X/Open CLI, 230, 232
XPath, 292, 298
xrange function, 90, 96–97, 570
XSLT (Extensible Stylesheet Language Transformations), 292, 294, 299
XTM emulator, 424, 428–429

Ζ

Z shell and Regina, 326